



Structural Product Guide

Global leaders in the supply of Engineer Designed Fibreglass Reinforced Plastic (FRP) Structural Profiles and Solutions



TREADWELL™

The Treadwell team is delighted to introduce the latest revision of our ArchitEX™ Structural Product Guide, showcasing the largest range of Fibreglass Reinforced Plastic (FRP) profiles in the market and the ultimate tool for designing FRP structures.

The data in this FRP Structural Product Guide has been collated to ensure that engineers and architects have the ideal reference available to them while designing structures that incorporate FRP Pultrusions.

While this guide offers a huge resource of information and statistics relevant to FRP Structural profiles, it is impossible to embrace the flexibility and constant evolution of the ArchitEX™ FRP composite range in one publication. To ensure that you have the most up to date information on the ArchitEX™ range of profiles and applications or to simply draw on our team's experience in this unique industry, contact us via the relevant numbers or visit www.treadwellgroup.com.au

This product guide is also available online, so if you are concerned that your copy may not be the latest, you can request an updated hardcopy or download it at www.treadwellgroup.com.au.

A BRIEF HISTORY

Treadwell Group is one of the most established names in the supply of Access Systems throughout Australia. Our centrally located Adelaide fabrication facility, coupled with our second to none distribution network across Australia, and our commitment to quality and testing, allows our technical staff to provide engineering and design assistance for any project.



With a broad history of installation in a wide range of challenging applications, including industrial process plants, mining applications, marine and coastal environments, as well as public infrastructure, Treadwell has the experience to help you specify the right resin systems and products every time.

If you have any unique design problems, chances are we've encountered something similar before. Get in contact today.


Treadwell Group Pty Ltd

Australia
P 1800 246 800
sales@treadwellgroup.com.au
treadwellgroup.com.au


New Zealand
P 0800 244 600
sales@treadwellgroup.co.nz
treadwellgroup.co.nz

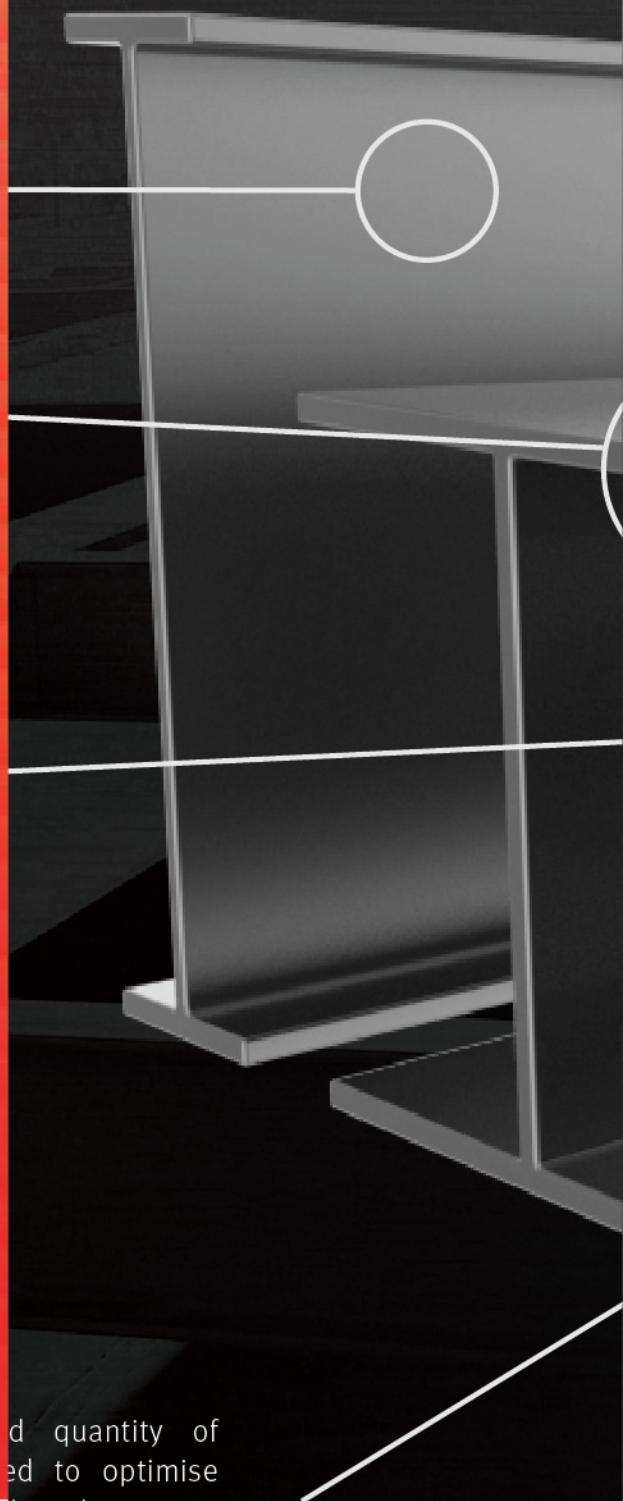

Mining and Minerals



Aquaculture

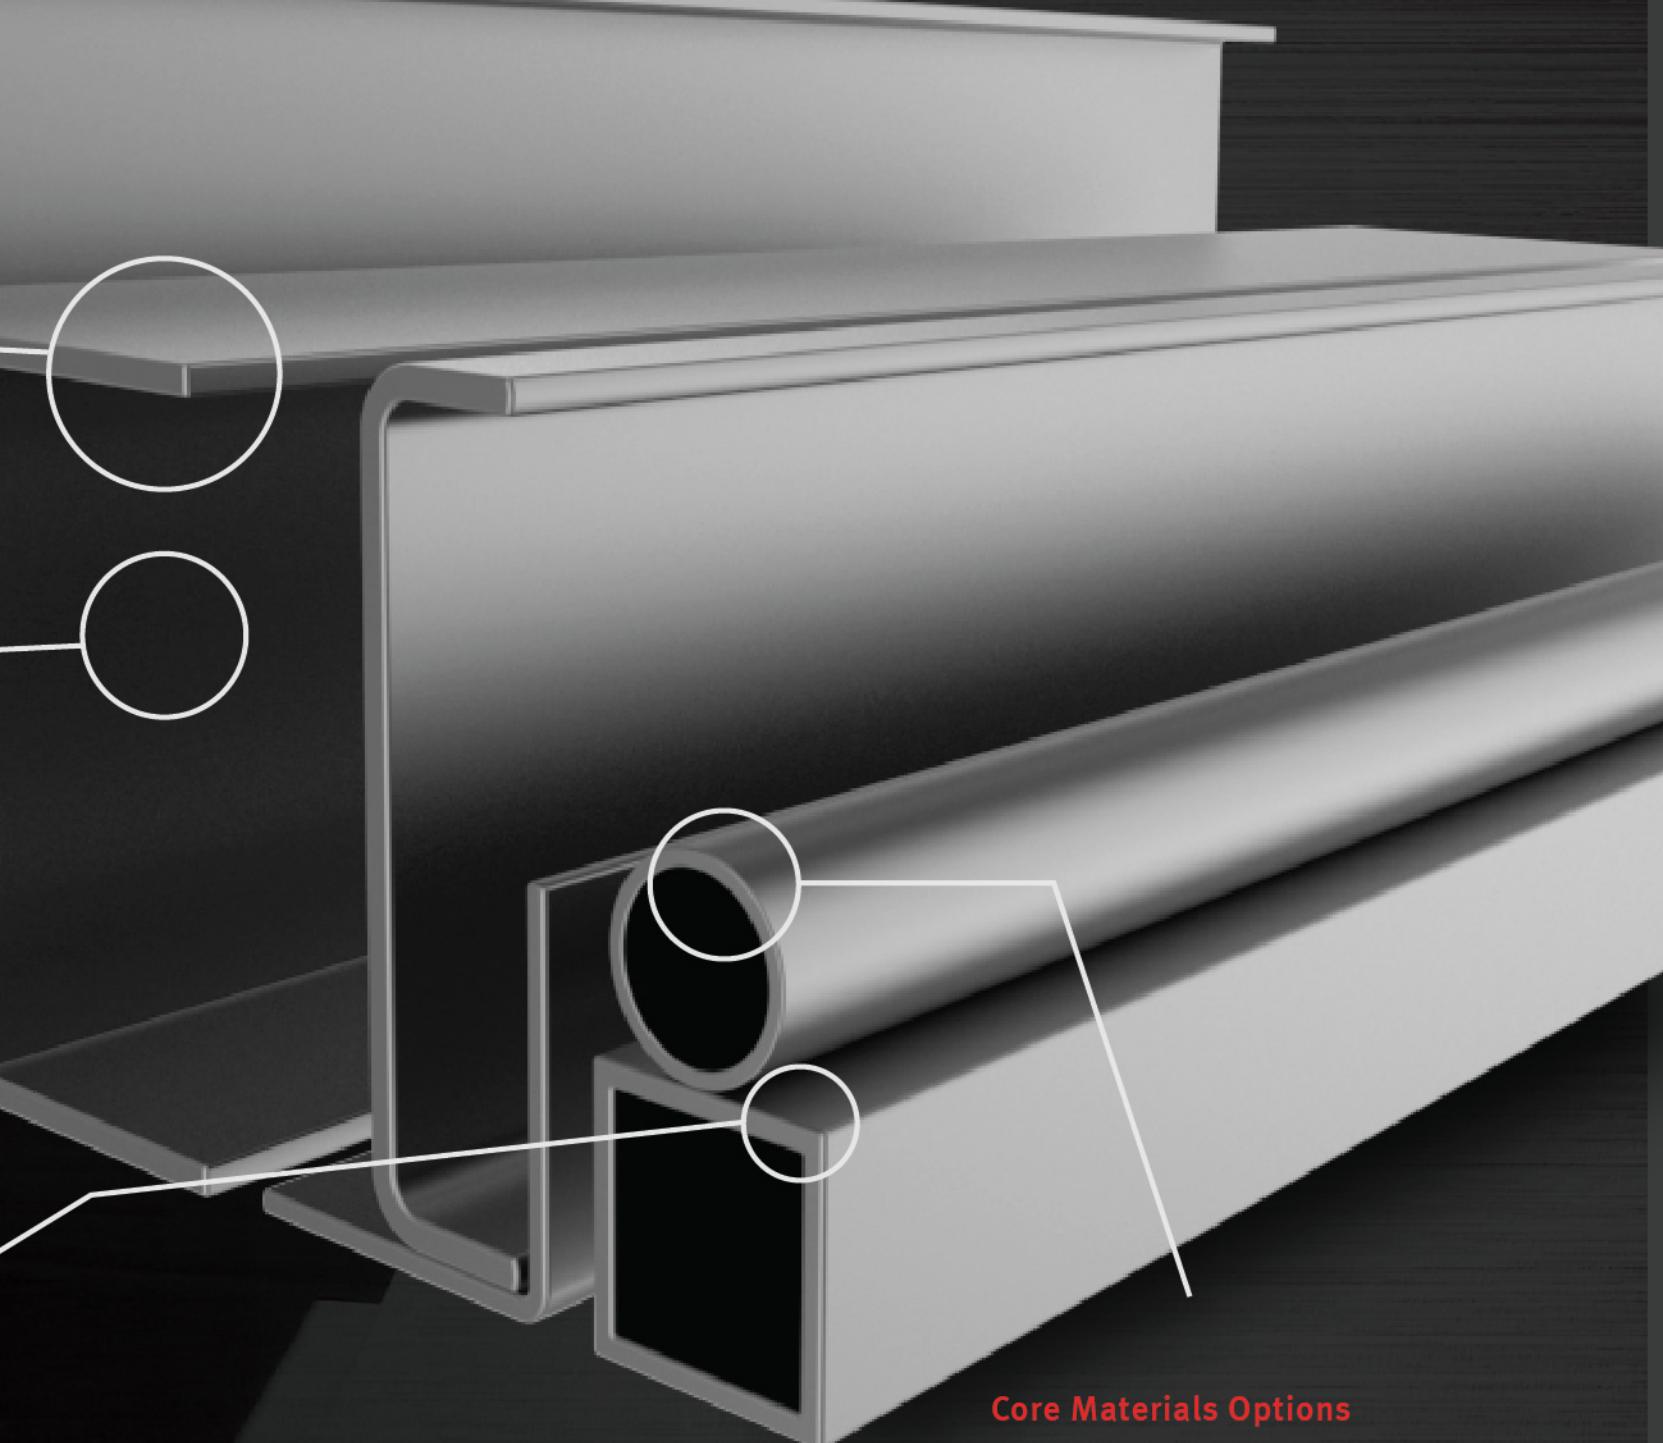


Core Materials Options

Treadwell provides a range of core material options with comprehensive experience in pultruding over various materials including foam, balsa, polyethylene and aluminium.



Maritime & Shipping



Chemicals and Petro Chemicals



Pulp and Paper



Food and Beverage

Contents



Section One: Introduction to Pultrusions

- 06 Composition of Pultrusions**
- 07 Resin Systems**
- 08 The Pultrusion Process**
- 09 Environmental Conditions**



Section Two: Coupon Properties

- 10 ArchitEX™ Profiles**
- 11 Typical Properties of Threaded Rod/Nuts**
- 12 Typical Coupon Properties of Flat Sheet**
- 13 Comparison**



Section Three: General Tolerances

- 15 Cross Sectional Tolerance**
- 17 Straightness**
- 18 Twist**



Section Four: Sectional Properties

- 21 C Section**
- 23 I-Beam**
- 25 WF-Beam**
- 26 Equal Leg Angle**
- 27 Rectangular Hollow Section**
- 29 Circular Hollow Section**
- 30 Solid Bar**
- 31 Circular Round Bar**
- 32 Embedment Angle**
- 33 Square Hollow Section**



Quality Policy

Quality is at the forefront of Treadwell Access Systems' working practices. With over 15 years of manufacturing to the highest quality standards, Treadwell Access Systems prides itself on its implementation of strict quality control measures, and strives to supply products that surpass customers' expectations. The company works on a policy of continuous improvement.



Environmental Policy

Treadwell Access Systems is conscious of the impact it has on the environment and its associated responsibilities. The company is committed to ensuring its operations satisfy both legal obligations and moral duties. Treadwell has been committed to sustainability for many years and is not just responding to current trends.





Section Five: Beams - Allowables Uniform Loads

- 36** Allowable Uniforms Loads Tables
- 39** Technical Data Tables - C Section
- 49** Technical Data Tables - I-Beam
- 60** Technical Data Tables - WF-Beam
- 68** Technical Data Tables - Rectangular Hollow Section
- 71** Technical Data Tables - Square Hollow Section
- 78** Technical Data Tables - Interlocking Deckboard
- 82** Technical Data Tables - Flat Sheet

Section Six: Columns

- 89** Columns

Section Seven: Columns - Allowable Concentric Axial Stresses and Loads

- 92** Technical Data Tables - Angle
- 100** Technical Data Tables - I-Beam
- 110** Technical Data Tables - WF-Beam
- 120** Technical Data Tables - Square Hollow Section
- 131** Technical Data Tables - Rectangular Hollow Section

Section Eight: Space Gass Input Guide

- 132** Space Gass Input Guide

Section Nine: Corrosion Guide

- 134** Corrosion Guide

Introduction to Pultrusions

Composition of FRP Pultrusions

What are pultrusions made of?

Pultrusions are composed of two key elements; glass fibre products and resin formulations. The glass contributes its inherent tensile flexural strength while the addition of resin ensures impact and corrosion resistance.

The glass fibre component normally consists of two different arrangements: glass roving which is unidirectional, and continuous mat which can be arranged in different ways to provide bi-directional stability as well as contributing to longitudinal strength properties.

Another integral part of a pultrusion is the surface veil which provides enhanced UV protection, corrosion resistance and aesthetics.

Roving

Roving is made up of fibreglass unidirectional filaments which are manufactured on continuous rolls. Roving is usually the principle element in a pultrusion, comprising 50% - 70% percent of the total glass content.

While supplying the necessary strength to pull the profile during manufacture, the roving also provides unsurpassed tensile and flexural properties. The percentage of roving in a pultrusion is the major variable in section stiffness.

Mat


Continuous strand mat constitutes the remainder of the glass reinforcement used in the pultrusion process. This would typically be 30% - 50% of the total glass content. It is important to differentiate between continuous strand mat and other hand-laid-up or press-moulded processes that utilise short chopped fibres. The mat that is used in the pultrusion process requires good tractive strength to ensure that it enters the die properly.

Fibreglass continuous strand mat is predominately applied to obtain the desired transverse properties of the product, whereas roving provides longitudinal stability to a section. Roving lacks the required lateral cohesion that is also an essential element in maintaining the maximum strength from a profile, it is the continuous strand mat that is principally responsible for this.

Surface Veil

Veils are utilised to enhance the surface properties of pultruded profiles. Most widely used today are synthetic variations which enhance the UV resistance properties and aesthetics. The veil also increases the resin content of the surface of the pultrusion which provides added corrosion resistance.

Cross Section of Pultrusion

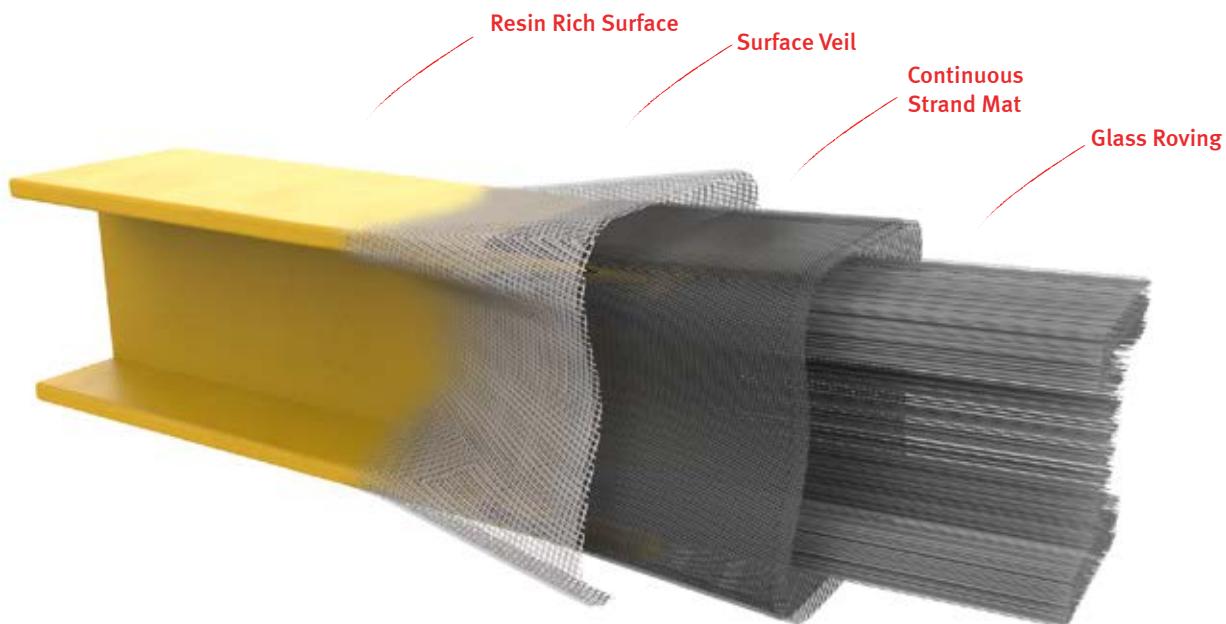

Introduction to Pultrusions

Resin Systems

When choosing a resin type for your application, we highly recommended you consult with us in relation to the application to ensure the correct resin is specified. Considerations such as corrosion, environment, temperature, fire resistance, smoke and smoke toxicity requirements must be taken into account, and will dictate which resin system should be utilised for optimum performance over time. Below is an overview of the resin systems offered in the ArchitEX™ range.

O-Series® is an architectural grade polyester resin system with an intermediate level of chemical resistance, and is a good choice for commercial or light industrial applications, especially in areas where moisture is prevalent. O-Series® is often utilised for public infrastructure applications where it has been proven to outperform traditional timber decking products. This system is available with or without fire retardant additives.

I-Series® is a premium isophthalic resin system. This system provides an intermediate level of chemical resistance and is the correct choice for areas subjected to splash and spill contact with harsh chemicals. This system is an excellent general-purpose resin and is a more favourably priced alternative to the vinyl ester system. This system has a flame spread of 25 (Approximately 15) or less.

V-Series® Vinylester resin is the most high quality chemical resistant system offered in the industry and has been developed for use in environments where FRP products are subject to frequent and direct contact with the harshest of chemical, including a broad range of acids and caustics. This system has a flame spread of 25 (Approximately 15) or less.

P-Series® The phenolic resin system is a system designed specifically for use where fire resistance, low smoke and low toxic fumes are critical. P-Series® is typically used in offshore applications and confined spaces where such criteria are an absolute necessity. This system is tested in accordance with ASTM E-84. Various products also conforming to US Coast Guard Approvals, Level 2 and 3, are also offered by Treadwell. This particular resin system has a flame spread rating of 5 and a smoke density rating of 5.

Standards Resin Systems Comparison Chart

	Chemical Resistance	Fire Retardance	Low Smoke	Halogen Free	Temperature Performance
O-Series® Polyester	• • •	• • • •	—	—	• • •
I-Series® Isophthalic	• • • • •	• • • • •	—	—	• • • •
V-Series® Vinyl Ester	• • • • •	• • • • •	—	—	• • • • •
P-Series® Phenolic	• • • •	• • • • •	• • • •	• • • • •	• • • • •

ArchitEX™ Features and Benefits vs. Traditional Alternatives

	ArchitEX™	Stainless Steel	Galvanised Steel	Aluminium	Polyurethane
Chemical Resistance	• • • • •	• • • •	•	• • •	• • • •
Strength	• • • • •	• • • • •	• • • • •	• • • • •	• • •
Lightweight	• • • • •	•	•	• • • • •	• • •
Electrical Resistance	• • • • •	•	•	•	• • • • •
Cost Effectiveness	• • • • •	• • •	• • • •	• •	• • • • •

Introduction to Pultrusions

The Pultrusion Process

How the Pultrusion Machine Works

Pultruding is the process that is used to form continuous structural profiles out of fibreglass and resin composites. The process is performed by a pultrusion machine. The first pultrusion process was developed in the mid-1940s with further major development and greater recognition in the mid-1950s.

The term pultrusion was derived from a combination of the word pull and extrusion. There are some parallels between the two processes given that they both produce continuous profiles and involve some sort of forming die. The main difference being that the pultrusion process utilises a series of pullers, which draw the product through the entire process as compared to extruding, which uses pressure or a pushing force.


The pultrusion process commences with fibreglass roving being pulled off rolls, through a guide and then being combined with the continuous strand mat. It is this fibreglass component that provides the resistance to tension that is necessary in the pultrusion process. The raw fibre is pulled through a series of guides or rollers and then enters a resin impregnation bath. The resin is usually a thermo-setting resin.

Now, the fibres are thoroughly 'wetted out' with the resin, they pass through a series of tooling which arranges the fibres correctly and removes excesses of resin. This set of tooling and guides is referred to as the pre-former. At this stage, the surface veil is added.

The uncured composite is then pulled into a heated die which commonly consists of 2-3 differing stages of temperature which initiate the curing of the resin component. The profile that exits the die is now a cured pultruded fibreglass reinforced plastic composite.

It is this rigid profile that is gripped further down the line by the pulling mechanism which provides steady and continuous tractive effort. After passing through the pullers, the FRP profile reaches a cut-off saw. The saw cuts the pultrusion to the desired length without slowing or halting the process.

This way high strength and light weight profiles can be created from fibreglass reinforced plastic to virtually any length required.

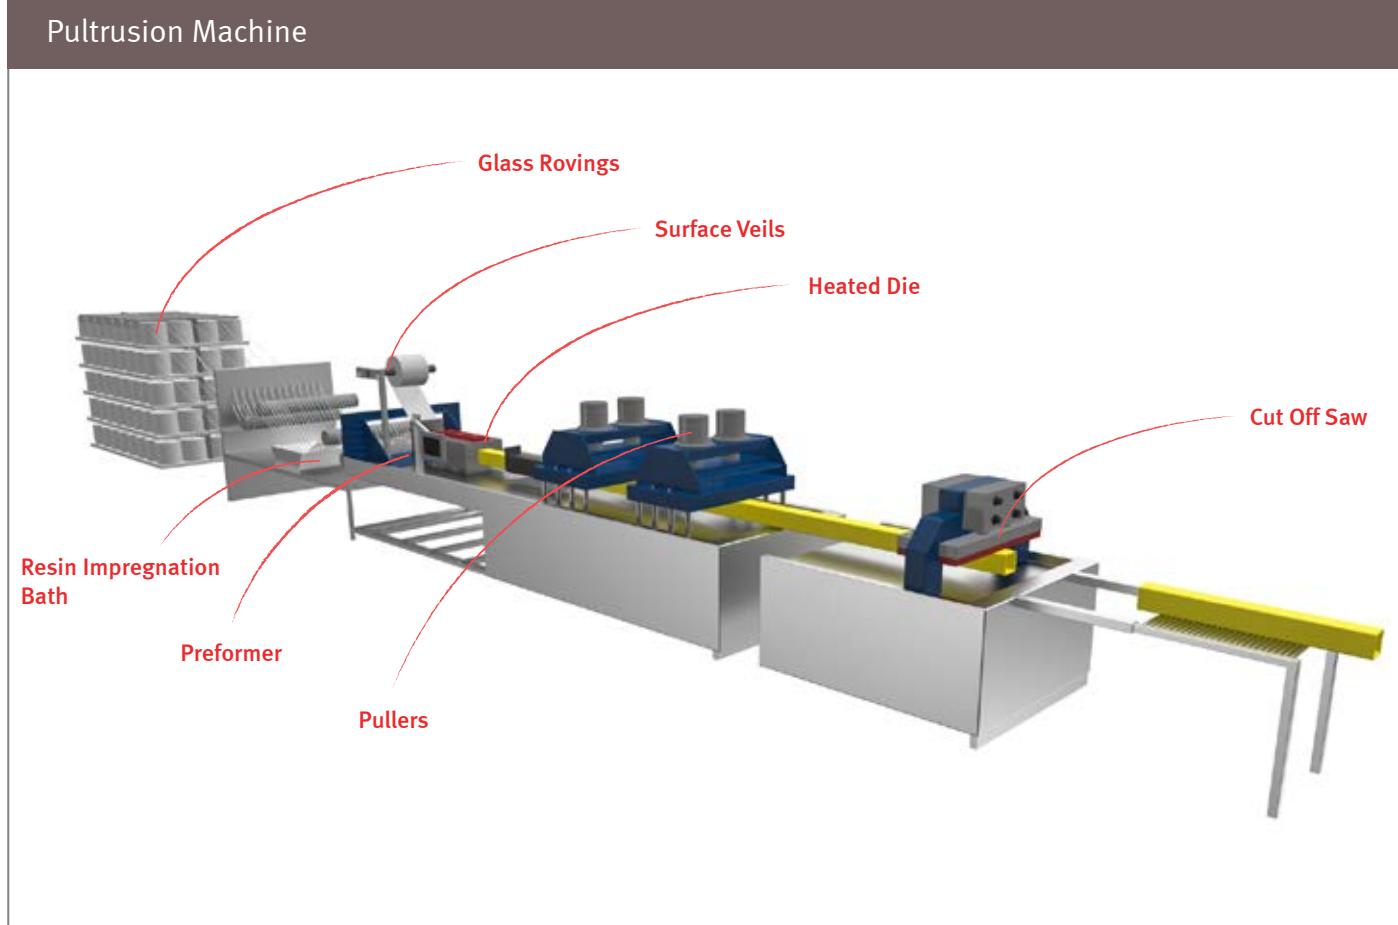

Introduction to Pultrusions

Environmental Conditions

Temperature

When designing a structure that is going to incorporate FRP sections, it is essential to consider environment changes such as temperature. Continued exposure to elevated temperatures can cause polyester and vinylester fibreglass pultrusions to lose certain percentages of their properties.

These tables shows the percentage of property retention when exposed to certain continuous temperatures.

Ultimate Stress

Temperature	Polyester	Vinylester
37°C	85%	90%
51°C	70%	80%
65°C	50%	80%
79°C	Not Recommended	75%
93°C	Not Recommended	50%

Modulus of Elasticity

Temperature	Polyester	Vinylester
37°C	100%	100%
51°C	90%	95%
65°C	85%	90%
79°C	Not Recommended	88%
93°C	Not Recommended	85%

Weathering

As with most plastic products, fibreglass reinforced pultrusions will undergo some form of visual degradation when exposed to outdoor weathering.

Typically, the surface of ArchitEX™ Pultrusions have good water and ambient temperature resistant properties but are susceptible to ultra-violet(UV) light. UV light is the light spectrum between 290 and 400 nanometres. This light has a higher energy and causes significant degradation to polymers by breaking chemical bonds or starting chemical reactions. The fire retardant polyester formulations contain a halogen which makes these plastics typically more susceptible to UV light degeneration.

Deterioration that has been caused by UV light can be identified by 'fade' and 'yellowing' on the pultrusion surface. Over an extended period of exposure, the actual glass fibres closest to the surface will become exposed. This state is known as fibrebloom and does not directly or immediately affect the physical properties of the section.

Treadwell adds a UV stabiliser into the resin formulation. This is especially important due to the extreme exposure that our products experience in the Pacific region. Also to ensure that our pultruded products endure a protracted lifespan, we use high quality polyester surface veils to ensure that the structural component of the composite is protected as well as possible from damaging and corroding elements.

The ArchitEX™ range is also offered with a range of exterior coatings to enhance aesthetics. If a Urethane coating is applied, this will also provide a hugely effective protection barrier to outdoor weathering.

Pultrusion Availability

Treadwell is arguably the largest stockist of FRP pultrusion products in Australia. We always stock a comprehensive range of I-Beam, C Section, Hollow Section and Angle products which are commonly in high demand. Due to the consistent and rapid evolution of the fibreglass pultrusion market, we are continually reevaluating our range of stocked products to ensure that our holdings accurately reflect customer demand.

We utilise efficient transport networks across Australia to ensure rapid delivery to remote locations and stock products in most capital cities.

Our complete range of products available is listed in the Section Properties tables. To obtain price and availability or find out if the product you require is a stock item, call Treadwell on 1800 246 800.



Coupon Properties

ArchitEX™ Profiles

Below are test results for typical coupon properties of Treadwell Group's structural fibreglass profiles. Properties are derived per the ASTM test method shown. Synthetic surfacing veil and ultraviolet inhibitors are standard.

Mechanical Properties	ASTM	Units	Value
Tensile Stress, LW	D-638	MPa	206.8
Tensile Stress, CW	D-638	MPa	48.2
Tensile Modulus, LW	D-638	GPa	17.2
Tensile Modulus, CW	D-638	GPa	5.5
Compressive Stress, LW	D-695	MPa	206.8
Compressive Stress, CW	D-695	MPa	103.4
Compressive Modulus, LW	D-695	GPa	17.2
Compressive Modulus, CW	D-695	GPa	6.9
Flexural Stress, LW	D-790	MPa	206.8
Flexural Stress, CW	D-790	MPa	68.9
Flexural Modulus, LW	D-790	GPa	12.4
Flexural Modulus, CW	D-790	GPa	5.5
Modulus of Elasticity, E	Full Section	GPa	19.3
Shear Modulus	--	GPa	3.1
Short Beam Shear	D-2344	MPa	31.0
Punch Shear	D-732	MPa	68.9
Notched Izod Impact, LW	D-256	J/mm	1.33
Notched Izod Impact, CW	D-256	J/mm	0.21

Physical Properties	ASTM	Units	Value
Barcol Hardness	D-2583	----	45
24 Hour Water Absorbtion	D-570	% max.	0.45
Density	D-792	g/cc	1.72-1.94
Coefficient of Thermal Expansion, LW	D-696	10 ⁶ cm./cm./°C	12

Electrical Properties	ASTM	Units	Value
Arc Resistance, LW	D-495	seconds	120
Dielectric Strength, LW	D-149	kv./mm	1.37
Dielectric Strength, PF	D-149	volts/mil.	200
Dielectric Constant, PF	D-150	@60hz	5

Fire Retardant Polyester and Fire Retardant Vinylester Structural Profiles:			
Flammability Properties	ASTM	Units	Value
Tunnel Test	E-84	Flame Spread	25 max.
Flammability	D-635	--	Nonburning
UL	94	VO	
NBS Smoke Chamber	E-662	Smoke Density 600-700	

CW = Crosswise

LW = Lengthwise

PF = Perpendicular to Laminate Face

Coupon Properties

Typical Properties of Threaded Rod / Nuts

Treadwell Group's threaded rod and nuts are manufactured using premium vinylester resin containing UV inhibitors. The properties listed below are the result of the ASTM test method indicated.

Properties	ASTM	Units	Diameter - Threads per Inch (UNC)					
			9.5mm	12.7mm	15.9mm	19.0mm	25.4mm	
Ultimate Transverse Shear (Double Shear)	B-565	Newton	18,680	30,240	44,480	59,600	106,750	
Longitudinal Compressive Strength	D-695	MPa	344	344	344	344	344	
Flexural Strength	D-790	MPa	482	482	482	482	482	
Flexural Modulus	D-790	GPa	17.2	17.2	17.2	17.2	17.2	
Flammability	D-635	Self-extinguishing for all						
Fire Retardant			Class 1					
Water Absorption (24 hr. immersion)	D-570	% max.	0.8	0.8	0.8	0.8	0.8	
Longitudinal Coefficient of Thermal Expansion	D-696	10^{-6} mm/mm/°C	11	11	11	11	11	
Ultimate Thread Shear (using fibreglass nut)	-- --	Newton	5,337	10,670	16,010	17,790	36,470	
Ultimate Torque Strength (fibreglass nut lubricated with SAE 10W30 motor oil)		NewtonMeter	10	21	47	67	149	
Rod Weight	-- --	Kg./m	0.104	0.119	0.297	0.447	0.789	
Nut Weight	-- --	grams	4.5	9.1	18.1	27.2	63.6	
Nut Dimensions	-- --	mm.(square) x mm.(thick)	17.2 x 11.4	21.8 x 14.2	26.9 x 17.5	31.5 x 20.8	41.4 x 27.9	
Color			Gray					

Typical Properties of Rod, Bar, and Flat Sheet

Below are test results for typical coupon properties of Treadwell Group's Rod, Bar, and Flat Sheet reinforced with all unidirectional longitudinal fibreglass roving. Properties are derived per the ASTM test method shown.

Properties	ASTM	Units	Rod	Bar	Flat Sheet
Tensile Stress	D-638	MPa	620.5	165.5	620.5
Tensile Modulus	D-638	GPa	34.7	27.6	34.7
Compressive Stress	D-695	MPa	413.7	344.7	344.7
Flexural Stress	D-790	MPa	689.5	620.5	689.5
Flexural Modulus	D-790	GPa	41.4	31.0	31.0
Barcol Hardness	D-2583		60	60	60
Izod Impact	D-256	J/mm	2.14	2.14	2.14
Density	D-792	gr/cc	1.80-2.07	1.80-2.07	1.80-2.07
Water Absorption (24 hour)	D-570	%	0.2	0.2	0.2

Coupon Properties

Typical Coupon Properties of Flat Sheet

Below are test results for typical coupon properties of Treadwell Group's Flat Sheet. Properties are derived per the ASTM test method shown. Synthetic surfacing veil and ultraviolet inhibitors are standard.

Mechanical Properties	ASTM	Units	Thickness					
			STD & FR			VE		
			3.2	4.8 - 6.4	9.5 - 25.4	3.2	4.80 - 6.4	9.5 - 25.4
Tensile Stress, LW	D-638	MPa	165.5	165.5	165.5	165.5	165.5	165.5
Tensile Stress, CW	D-638	MPa	51.7	68.9	68.9	51.7	68.9	68.9
Tensile Modulus, LW	D-638	GPa	13.8	13.8	13.8	13.8	13.8	13.8
Tensile Modulus, CW	D-638	GPa	6.9	7.6	9.6	6.9	7.6	9.6
Compressive Stress, LW	D-695	MPa	165.5	165.5	165.5	165.5	165.5	165.5
Compressive Stress, CW	D-695	MPa	106.9	113.8	113.8	113.8	120.7	120.7
Compressive Modulus, LW	D-695	GPa	12.4	12.4	12.4	12.4	12.4	12.4
Compressive Modulus, CW	D-695	GPa	6.9	6.9	6.9	6.9	6.9	6.9
Flexural Stress, LW	D-790	MPa	241.3	241.3	206.8	241.3	241.3	206.8
Flexural Stress, CW	D-790	MPa	103.4	103.4	124.1	103.4	103.4	124.1
Flexural Modulus, LW	D-790	GPa	11.0	13.8	13.8	11.0	13.8	13.8
Flexural Modulus, CW	D-790	GPa	6.2	7.6	9.6	6.2	7.6	9.6
Perpendicular Shear Stress, LW	D-3846	MPa	41.3	41.3	41.3	41.3	41.3	41.3
Perpendicular Shear Stress, CW	D-3846	MPa	41.3	41.3	41.3	41.3	41.3	41.3
Bearing Stress, LW	D-953	MPa	220.6	220.6	220.6	220.6	220.6	220.6
Notched Izod Impact, LW	D-256	J/mm	0.99	1.1	1.1	1.0	1.1	1.06
Notched Izod Impact, CW	D-256	J/mm	0.27	0.3	0.3	0.3	0.3	0.27

Physical Properties								
Barcol Hardness	D-2583	---	40.0	40.0	40.0	40.0	40.0	40.0
24 Hour Water Absorption	D-570	% max.	0.6	0.6	0.6	0.6	0.6	0.6
Density	D-792	g/cc	1.72 - 1.94	1.72 - 1.94	1.72 - 1.94	1.72 - 1.94	1.72 - 1.94	1.72 - 1.94
Coefficient Thermal Expansion, DW	D-696	10 ⁶ mm/mm /°C	8.0	8.0	8.0	8.0	8.0	8.0

Electrical Properties								
Arc Resistance, LW	D-495	seconds	120.0	120.0	120.0	120.0	120.0	120.0
Dielectric Strength, LW	D-149	kv./mm	1.37	1.37	1.37	1.37	1.37	1.37
Dielectric Strength, PF	D-149	volts/mil.	200.0			200.0		

Flammability Properties For FR and VE							
Tunnel Test	E-84	Flame Spread 25 max.			CW	Crosswise	
Flammability	D-635	Non-burning			LW	Lengthwise	
UL	94	VO			PF	Perpendicular to Laminate Face	
NBS Smoke Chamber	E-662	Smoke Density 600-700					

Comparison



COMPARE

	ArchitEX™	vs	Steel
Corrosion Resistance	ArchitEX™ is available in either polyester or vinylester resin for resistance to a board range of chemicals. Painting is beneficial in assisting with UV resistance when subjected to prolonged exposure.	Subject to oxidation and corrosion. Requires painting or galvanizing for many applications.	
Weight	Lightweight - weight 25% as much as steel. ½* thick plate = 4.7 lbs./sq.ft	Could require lifting equipment to move and place. 1/2* thick plate = 20.4 lbs./sq.ft.	
Conductivity	Low electrical conductivity properties - high dielectric capability Low thermal conductivity 4 (BTU/SF/HR/F°/IN).	Conducts electricity. Potential Shock Hazard Thermal Conductivity 260-460 (BTU/SF/HR/F°/IN).	
Strength	ArchitEX™ has a high strength-to-weight ratio and pound-for-pound is stronger than steel in the lengthwise direction. Tensile strength = 30 KSI , CW = 7 KSI	Homogeneous material. Tensile strength = 60 KSI Yield strength = 36 KSI	
Stiffness	Modulus of Elasticity = 2.5 MSI Will not permanently deform under working load.	Flexural modulus = 29 KSI Modulus of Elasticity = 29 MSI	
Impact Resistance	Glass mats in ArchitEX™ distributes impact load to prevent surface damage. Will not permanently deform under impact.	Can permanently deform under impact.	
EMI/RFI Transparency	Transparent to EMI/RFI transmissions.	Can interfere with EMI/RFI transmissions.	
Versatility	Pigments added to the resin provide color throughout the part. Special colors available.	Must be painted for color. To maintain color and corrosion resistance, repainting may be required.	
Easy Field Fabrication	ArchitEX™ can be field fabricated using simple carpenter tools with carbide or diamond tip blades. Lightweight for easier erection and installation.	Often requires welding and cutting torches. Heavier material requires special handling equipment to erect and install.	
Cost	Lower installation and maintenance costs in industrial applications often equals lower lifecycle costs.	Lower initial cost.	



General Tolerances

General Tolerance

Cross Sectional Tolerances

Shapes	Dimension	Tolerance % of Nominal	* Maximum or Minimum Tolerances
Angles	t = thickness	$\pm 10\%$	$\pm 0.26\text{mm min.}$
	b = flange width	$\pm 4\%$	$\pm 2.4\text{mm max.}$
	d = depth	$\pm 4\%$	$\pm 2.4\text{mm max.}$
C Sections	t = thickness	$\pm 10\%$	$\pm 0.26\text{mm min.}$
	b = flange width	$\pm 4\%$	$\pm 2.4\text{mm max.}$
	d = depth	$\pm 4\%$	$\pm 2.4\text{mm max.}$
Beams	t = thickness	$\pm 10\%$	$\pm 0.26\text{mm min.}$
	b = flange width	$\pm 4\%$	$\pm 2.4\text{mm max.}$
	d = depth	$\pm 4\%$	$\pm 2.4\text{mm max.}$
Flat Sheet	t = thickness	$\pm 15\%$ $\pm 10\%$	0.25mm min 1.27mm max
	b = width	$\pm 4\%$	$\pm 2.4\text{mm max.}$

General Tolerance

Cross Sectional Tolerance

Shapes	Dimension	Outside Dimension Condition	Tolerances
Closed Shapes (Round, Square and Rectangular Tubes)	$t = \text{thickness}$	All	0.25mm min
	$\text{od} = \text{outside dimension}$	All	2.39mm max
Round Rod & Square Bar	$\text{od} = \text{outside dimension}$	All	2.39mm max

Flatness

Flatness is measured in the center with the weight of the profile minimising the deviation by contact with a flat surface

Structural Shapes Rods, Bars, & Flat Sheet	Allowable deviation from flat	
	Width	All Thickness
	Up to 25.4mm	0.2mm
Hollow Shapes	Allowable deviation from flat	
	Width	Thickness under 4.8mm
	Up to 25.4mm	0.3mm
	Over 25.4mm	0.3mm x width
	Thickness 4.8mm and over	
	4.8mm x width	

General Tolerance

Straightness



Straightness is measured in the enter with the weight of the pultrusion minimising the deviation by contact with a flat surface.

Angle, Beam and C Section	Allowable deviation from straight		
	All widths	4.2mm/m	
Rods and Bars	Width	Thickness	Allowable deviation from straight
	(38.1mm)	----	(4.17mm/m)
		(2.4mm) and over	(3.33mm/m)
Round, Square, and Rectangular Tube	(38.1mm) and over	All thickness	(3.33mm/m)
	Diameter/Depth	Per Meter	
Flat Sheet and Plate	All	2.5mm	
	All thickness and widths	2.5mm	

General Tolerance


Twist

Twist is measured with the weight of the pultrusion minimising the twist.


Bars and other Structural Profiles other than Tubes	Allowable twist
	0.003°/mm
Closed Profiles (Tubes)	Allowable twist
	0.003°/mm

Angularity

Angularity is the angle measured between two prependicular faces of the profile.

All Profiles	Allowable deviation from specific angle
	Thickness up to 19mm 2°


Cut Lengths

All Profiles	Allowable deviation from specific length
	up to 2.44m 0 + 6.35mm
	2.44m <= 7.32m 0 + 12.7mm
	> 7.32m 0 + 76.2mm

*All parts being cut from stock must allow for blade width

Squareness of Endcut

All Profiles	Allowable deviation from specific length
	Profiles 50.8mm and under ± 2°
	Profiles over 50.8mm ± 1°

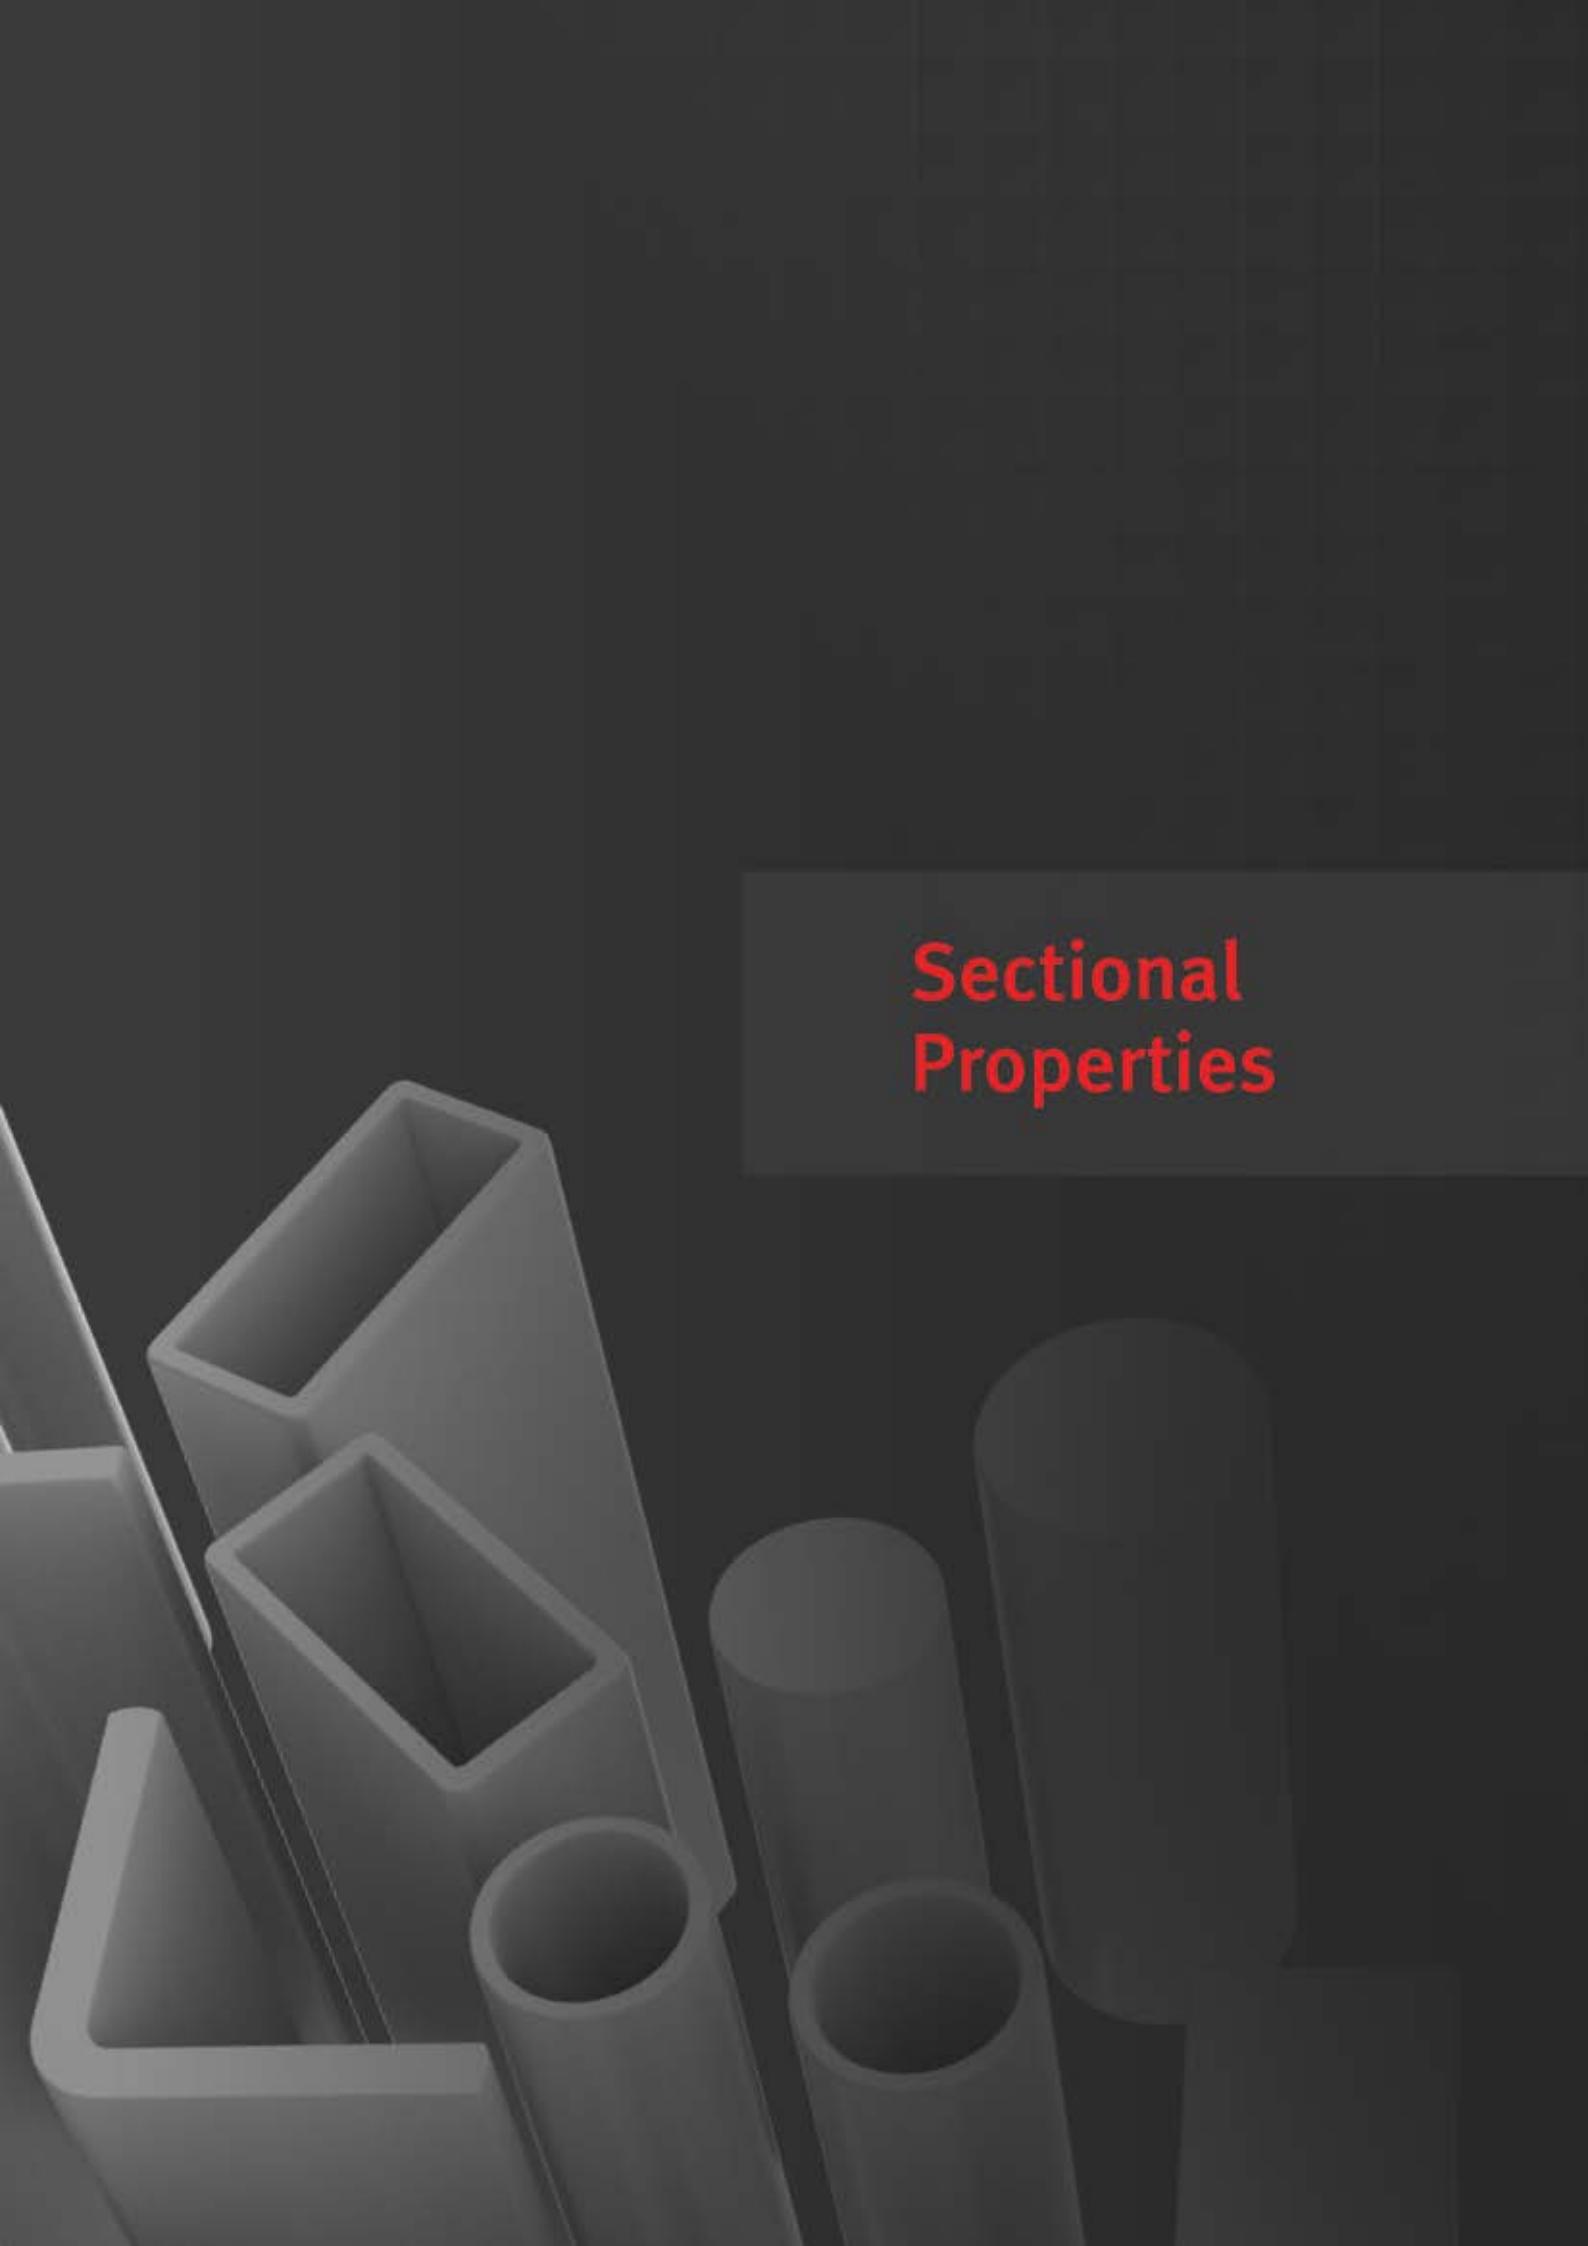

Sectional Properties

Sectional Properties

Elements of Sections of Structural Shapes


The section table values on the following pages have been calculated from nominal dimensions. All shapes shown in the tables are available, but not all are stocked. A shape availability list is included in the manual and, for convenience, availability information is noted on the individual uniform load tables.

Notation	
A	cross sectional area (in. ² / mm. ²)
b	width of section (in. / mm.)
d	depth of section / diameter of rod (in. / mm.)
h	length of angle leg (in. / mm.)
I	moment of inertia (in. ⁴ / mm. ⁴)
od	outside diameter of tube (in. / mm.)
r	radius of gyration (in. / mm.)
S	section modulus (in. ³ / mm. ³)
t	thickness (in. / mm.)
t _b	thickness of width dimension (in. / mm.)
t _d	thickness of depth dimension (in. / mm.)
Wt.	weight of section (lbs./ft. / kgs./m.)

Sectional Properties

Sectional Properties - C Section

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

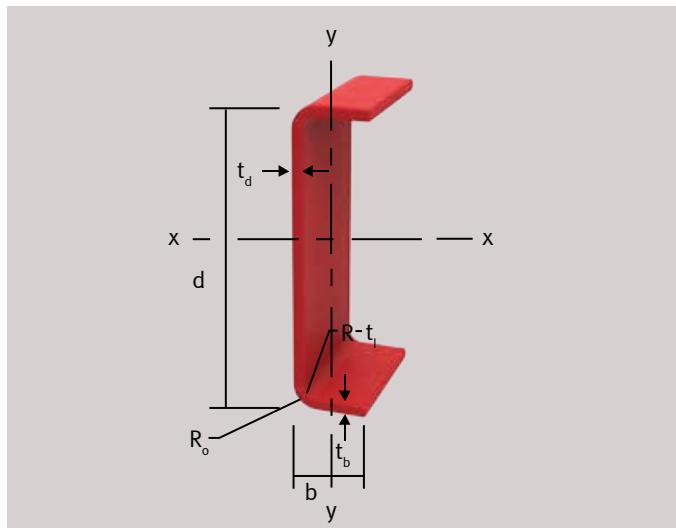

C Section		Sectional Dimensions					
Part	Part Number	d mm	b mm	t(w) mm	t(f) mm	Area mm²	Weight Kg./m
		Web	Flange				
50.8x14x3.2mm C Section	F-P-CS(51/14/3.2)	50.8	14.2	3.2	3.2	231.854375	0.417666
76.2x22.2x6.4mm C Section	F-P-CS(76/22/6.4)	76.2	6.35	6.4	85.4	685.4825	1.234838
76.2x25.4x6.4mm C Section	F-P-CS(76/25/6.4)	76.2	25.4	6.4	6.4	725.805	1.307475
76.2x38.1x6.4mm C Section	F-P-CS(76/38/6.4)	76.2	38.1	6.4	6.4	887.095	1.598025
88.9x3.2x30.2x4.8mm C Section	F-P-CS(89/3.2/30/4.8)	88.9	30.2	3.2	4.8	539.313438	0.971527
88.9x38.1x4.8mm C Section	F-P-CS(89/38/4.8)	88.9	38.1	4.8	4.8	740.925938	1.334714
101.6x28.6x6.4mm C Section	F-P-CS(102/29/6.4)	101.6	28.6	6.4	6.4	927.4175	1.670663
101.6x34.9x4.8mm C Section	F-P-CS(102/35/4.8)	101.6	34.9	4.8	4.8	771.167813	1.389192
139.7x38.1x6.4mm C Section	F-P-CS(140/38/6.4)	139.7	38.1	6.4	6.4	1290.32	2.3244
152.4x41.3x6.4mm C Section	F-P-CS(152/41/6.4)	152.4	41.3	6.4	6.4	1411.2875	2.542313
152.4x42.9x9.5mm C Section	F-P-CS(152/43/9.5)	152.4	42.9	9.5	9.5	2086.68938	3.758991
203.2x55.6x6.4mm C Section	F-P-CS(203/56/6.4)	203.2	55.6	9.5	9.5	2812.49438	5.066466
254x69.6x12.7mm C Section	F-P-CS(254/70/12.7)	254	69.9	12.7	12.7	4677.41	8.42595
292.1x69.9x12.7mm C Section	F-P-CS(292/70/12.7)	292.1	69.9	12.7	12.7	5161.28	9.2976
304.8x76.2x12.7mm C Section	F-P-CS(305/76/12.7)	304.8	76.2	12.7	12.7	5483.86	9.8787
355.6x88.9x19.1mm C Section	F-P-CS(356/89/19.1)	355.6	88.9	19.1	19.1	9435.465	16.99718
457.2x60.32x9.5mm C Section	F-P-CS(457/60/9.5)	457.2	60.3	9.5	9.5	5322.57	9.58815

Sectional Properties

Notation		
A	cross section area	mm ²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
I	moment of inertia	mm ⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm ³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

C Section		Section Properties											
Part	Part Number	X - X				Y - Y							
		I mm ⁴	S mm ³	r mm	I mm ⁴	S mm ³	r mm	J mm	h mm	C mm	C mm	A mm	
50.8x14x3.2mm C Section	F-PCS(51/14/3.2)	74757.63	2943.205	17.95644	3366.77	3198575	3.810652	846.8241	44.75	3.761685	25.4	141.129	
76.2x22.2x6.4mm C Section	F-PCS(76/22/6.4)	480725.1	12617.42	26.48198	23434.11	1484.895	5.846909	10297.38	63.5	6.443382	38.1	403.225	
76.2x25.4x6.4mm C Section	F-PCS(76/25/6.4)	530044.2	13911.88	27.02379	34956.9	1942944	6.939956	10839.35	63.5	7.408333	38.1	403.225	
76.2x38.1x6.4mm C Section	F-PCS(76/38/6.4)	727320.3	19089.72	28.63374	115315.9	4390.313	11.40144	13007.22	63.5	11.83409	38.1	403.225	
88.9x3.2x30.2x4.8mm C Section	F-PCS(89/3.2/30/4.8)	6413126	14427.69	34.48375	46437.71	2171.325	9.279295	1592029	79.375	8.775759	44.45	252.016	
88.9x38.1x4.8mm C Section	F-PCS(89/38/4.8)	841417.2	18929.47	33.69912	96058.44	3486.12	11.38625	5944.705	79.375	10.54554	44.45	378.023	
101.6x28.6x6.4mm C Section	F-PCS(102/29/6.4)	1196122	23545.62	35.91289	53868.32	2558.86	7.621304	13549.19	88.9	7.52337	50.8	564.515	
101.6x34.9x6.4mm C Section	F-PCS(102/35/6.4)	1090307	21462.68	37.60107	77665.79	2982.765	10.03554	6173.348	92.075	8.886887	50.8	438.507	
139.7x38.1x6.4mm C Section	F-PCS(140/38/6.4)	3236630	46336.73	50.08388	137456.5	4744.467	10.32129	18426.89	127	9.128125	69.85	806.45	
152.4x41.3x6.4mm C Section	F-PCS(152/41/6.4)	4239811	55640.41	54.81075	177874.7	5626.449	11.22663	20052.8	139.7	9.661071	76.2	887.095	
152.4x42.9x9.5mm C Section	F-PCS(152/43/9.5)	6055368	79466.55	53.86933	272708.4	8636.152	11.43196	68592.76	133.35	11.28505	76.2	1270.159	
203.2x55.6x6.4mm C Section	F-PCS(203/56/6.4)	14890522	146559.8	72.76279	635340	15077.91	15.02995	90542.44	184.15	13.42547	101.6	1754.029	
254x69.6x12.7mm C Section	F-PCS(254/70/12.7)	38492696	303091.2	90.71658	1659560	31513.82	18.83623	268815.9	228.6	17.18879	127	2903.22	
292.1x69.9x12.7mm C Section	F-PCS(292/70/12.7)	54725705	374704.2	102.9715	1717580	31998.13	18.24231	294830.3	266.7	16.17266	146.05	3387.09	
304.8x76.2x12.7mm C Section	F-PCS(305/76/12.7)	64394404	422534.2	422534.2	108.363	2246678	38310.27	20.24079	279.4	17.55588	152.4	3548.38	
355.6x88.9x19.1mm C Section	F-PCS(356/89/19.1)	146822234.8	825769.5	124.7425	5061997	75735.3	23.16218	1229182	317.5	22.06218	177.8	6048.375	
457.2x60.32x9.5mm C Section	F-PCS(457/60/9.5)	124352263.10	543971.6	152.8503	961388.7	19197.61	13.43968	166451.8	438.15	10.24659	228.6	4173.379	

Sectional Properties


Sectional Properties – I-Beam

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

*457.20 I Beam - Web = 9.53mm Flange = 12.70mm

*609.60 I Beam - Web = 9.53mm Flange = 19.05mm

Metric

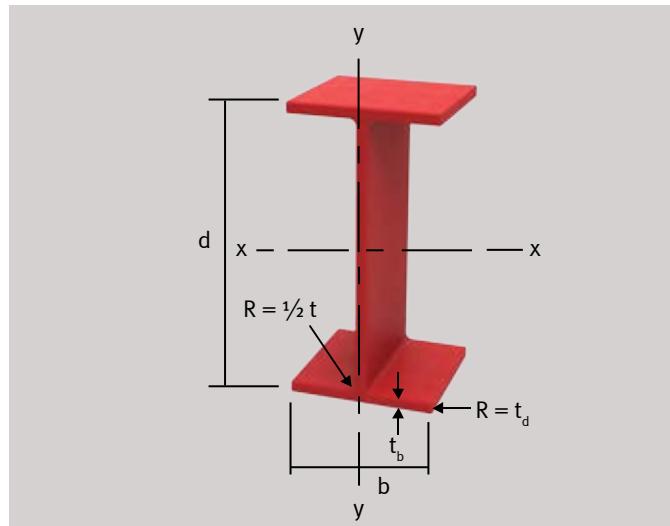

I-Beam		Sectional Dimensions						
Part	Part Number	d mm	b mm	t(w) mm	t(f) mm	Area mm²	Weight Kg./m	
		Web	Flange					
76.2 x 38.1 x 6.4mm I-Beam	F-P-IS(76/38/6.4)	76.2	38.1	6.4	6.4	886.88	1.60	
88.9 x 38.1 x 4.8mm I-Beam	F-P-IS(89/38/4.8)	88.9	38.1	4.8	4.8	740.74	1.33	
101.6 x 50.8 x 6.4mm I-Beam	F-P-IS(102/51/6.4)	101.6	50.8	6.4	6.4	1209.38	2.18	
139.7 x 63.5 x 6.4mm I-Beam	F-P-IS(140/64/6.4)	139.7	63.5	6.4	6.4	1612.50	2.91	
152.4 x 76.2 x 6.4mm I-Beam	F-P-IS(152/76/6.4)	152.4	76.2	6.4	6.4	1854.38	3.34	
152.4 x 76.2 x 9.5mm I-Beam	F-P-IS(152/76/9.5)	152.4	76.2	9.5	9.5	2721.09	4.90	
203.2 x 101.6 x 9.5mm I-Beam	F-P-IS(203/102/9.5)	203.2	101.6	9.5	9.5	3688.59	6.65	
203.2 x 101.6 x 12.7mm I-Beam	F-P-IS(203/102/12.7)	203.2	101.6	12.7	12.7	4837.50	8.72	
254 x 127 x 9.5mm I-Beam	F-P-IS(254/127/9.5)	254.0	127.0	9.5	9.5	4656.09	8.39	
254 x 127 x 12.7mm I-Beam	F-P-IS(254/127/12.7)	254.0	127.0	12.7	12.7	6127.50	11.04	
304.8 x 152.4 x 12.7mm I-Beam	F-P-IS(305/152/12.7)	304.8	152.4	12.7	12.7	7417.50	13.37	
457.2 x 9.5 x 114.3 x 12.7mm I-Beam	F-P-IS(457/9.5/114/12.7)	457.2	114.3	9.5	12.7	7014.38	12.64	
609.6 x 9.5 x 190.5 x 19.1mm I-Beam	F-P-IS(610/9.5/191/19.1)	609.6	190.5	9.5	19.1	12698.44	22.88	

Sectional Properties

Notation		
A	cross section area	mm ²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
I	moment of inertia	mm ⁴
od	outside diametre of tube	mm


Notation		
r	radius of gyration	mm
S	section modulus	mm ³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

I-Beam		Section Properties											
Part	Part Number	X - X				Y - Y							
		I mm ⁴	S mm ³	r mm	I mm ⁴	S mm ³	r mm	J mm	h mm	A mm	C mm	C mm	
76.2x38.1x6.4mm I-Beam	FPIS(76/38/6.4)	727321.06	19089.79	28.63	59887.46	3143.70	8.22	11923.30	63.50	403.23	19.05	38.10	
88.9x38.1x4.8mm I-Beam	FPIS(89/38/4.8)	841418.03	18929.54	33.70	44613.92	2341.94	7.76	5601.75	79.38	378.02	19.05	44.45	
101.6x50.8x6.4mm I-Beam	FPIS(102/51/6.4)	1837271.53	36166.76	38.97	140640.70	5537.04	10.78	16259.04	88.90	564.52	25.40	50.80	
139.7x63.5x6.4mm I-Beam	FPIS(140/64/6.4)	4671764.18	66882.81	53.82	273693.84	8620.28	13.03	21678.72	127.00	806.45	31.75	69.85	
152.4x76.2x6.4mm I-Beam	FPIS(152/76/6.4)	6606589.95	86700.66	59.68	471241.18	12368.53	15.94	24930.53	139.70	887.10	38.10	76.20	
152.4x76.2x9.5mm I-Beam	FPIS(152/76/9.5)	9301187.11	122062.82	58.46	711993.53	18687.49	16.17	82311.39	133.35	1270.16	38.10	76.20	
203.2x101.6x9.5mm I-Beam	FPIS(203/102/9.5)	23121371.16	227572.55	79.16	1678186.98	33035.18	21.33	111577.66	184.15	1754.03	50.80	101.60	
203.2x101.6x12.7mm I-Beam	FPIS(203/102/12.7)	29396344.43	289334.10	77.94	2250251.14	44296.28	21.57	260144.64	177.80	2258.06	50.80	101.60	
254x127x9.5mm I-Beam	FPIS(254/127/9.5)	46462849.07	365849.21	99.88	3268727.58	51476.02	26.49	140843.93	234.95	2237.90	63.50	127.00	
254x127x12.7mm I-Beam	FPIS(254/127/12.7)	59642494.69	469625.94	98.65	4374765.71	68893.95	26.71	329516.55	228.60	2903.22	63.50	127.00	
304.8x152.4x12.7mm I-Beam	FPIS(305/152/12.7)	105705439.13	693605.24	119.36	7539838.84	98948.28	31.88	398888.45	279.40	3548.38	76.20	152.20	
457.2x95.5x114.3x12.7mm I-Beam	FPIS(457/95.5/114/12.7)	207348286.11	907035.37	171.91	3191852.00	55850.44	21.33	280468.44	431.80	4112.90	57.15	228.60	
609.6x95.5x190.5x19.1mm I-Beam	FPIS(610/95.5/191/19.1)	781189968.36	2562959.21	248.00	21990859.78	230878.17	41.61	1042610.94	571.50	5443.54	95.25	304.80	

Sectional Properties

Sectional Properties - WF-Beam

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

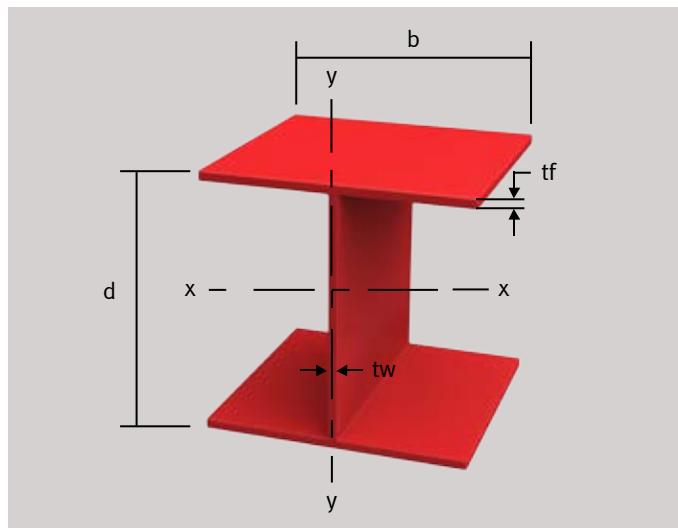

WF-Beam		Sectional Dimensions							Section Properties			
Part	Part Number	d mm	b mm	t(f) mm	Area mm²	Weight Kg./m	X - X			Y - Y		
		Web	Flange				l mm⁴	S mm³	r mm	l mm⁴	S mm³	r mm
76.2 x 6.4mm WF-Beam	F-P-WFB(76/6.4)	76.2	76.2	6.4	1374.2	2.44	1319454	34577	31.0	470342	12290	18.5
101.6 x 6.4mm WF-Beam	F-P-WFB(102/6.4)	101.6	101.6	6.4	1864.5	3.20	3304878	65057	42.2	1111338	21959	24.4
152.4 x 6.4mm WF-Beam	F-P-WFB(152/6.4)	152.4	152.4	6.4	2832.3	5.06	11771025	154530	64.5	3750245	49161	36.3
152.4 x 9.5mm WF-Beam	F-P-WFB(152/9.5)	152.4	152.4	9.5	4180.6	7.29	16720016	219423	63.2	5627449	73906	36.6
203.2 x 9.5mm WF-Beam	F-P-WFB(203/9.5)	203.2	203.2	9.5	5632.2	9.66	41285995	406399	85.6	13331893	131260	48.8
203.2 x 12.7mm WF-Beam	F-P-WF(B203/12.7)	203.2	203.2	12.7	7425.8	12.95	52844742	520125	84.3	17789731	175178	49.0
254 x 9.5mm WF-Beam	F-P-WFB(254/9.5)	254.0	254.0	9.5	7135.5	13.01	82634425	650730	107.7	26031113	205002	60.5
254 x 12.7mm WF-Beam	F-P-WFB(254/12.7)	254.0	254.0	12.7	9361.3	16.22	106638491	839673	106.9	34722026	273336	61.1
304.8 x 12.7mm WF-Beam	F-P-WFB(305/12.7)	304.8	304.8	12.7	11296.8	19.64	188323909	1236404	129.0	59983111	393617	72.9


Notation		
A	cross section area	mm²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
l	moment of inertia	mm⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Sectional Properties

Sectional Properties - Equal Leg Angle

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

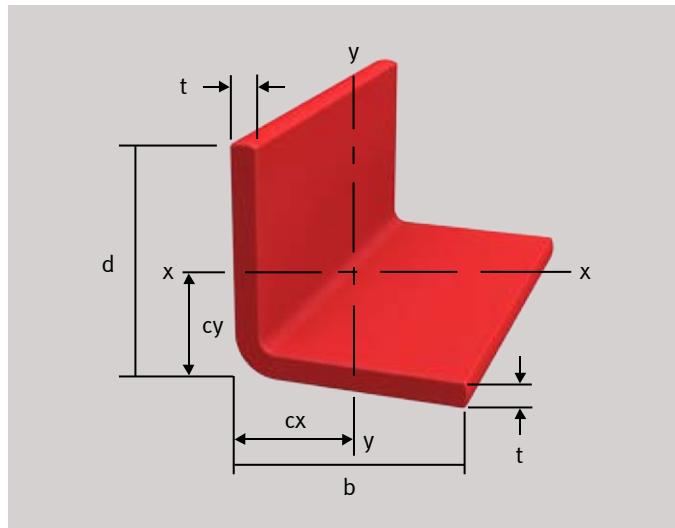

Equal Leg Angle		Sectional Dimensions					Section Properties				
Part	Part Number	d mm	b mm	t(f) mm	Area mm²	Weight Kg./m	I mm⁴	S mm³	r mm	C mm	
25.4 x 3.2mm Equal Leg Angle	F-P-ELA(25/3.2)	25.4	25.4	3.2	151.17	0.27	9042.40	505.56	7.73	7.51	
31.8 x 3.2mm Equal Leg Angle	F-P-ELA(32/3.2)	31.8	31.8	3.2	191.48	0.35	18291.87	807.85	9.77	9.11	
38.1 x 4.8mm Equal Leg Angle	F-P-ELA(38/4.8)	38.1	38.1	4.8	339.29	0.61	45676.24	1702.44	11.60	11.27	
38.1 x 6.4mm Equal Leg Angle	F-P-ELA(38/6.4)	38.1	38.1	6.4	443.44	0.80	57658.00	2195.17	11.40	11.83	
50.8 x 6.4mm Equal Leg Angle	F-P-ELA(51/6.4)	50.8	50.8	6.4	604.69	1.09	144678.36	4044.50	15.47	15.03	
76.2 x 6.4mm Equal Leg Angle	F-P-ELA(76/6.4)	76.2	76.2	6.4	927.19	1.67	517891.66	9450.02	23.63	21.40	
76.2 x 9.5mm Equal Leg Angle	F-P-ELA(76/9.5)	76.2	76.2	9.5	1360.55	2.45	732434.19	13650.17	23.20	22.54	
76.2 x 12.7mm Equal Leg Angle	F-P-ELA(76/12.7)	76.2	76.2	12.7	1773.75	3.20	922528.08	17561.32	22.80	23.67	
101.6 x 6.4mm Equal Leg Angle	F-P-ELA(102/6.4)	101.6	101.6	6.4	1249.69	2.25	1265062.58	17131.47	31.81	27.76	
101.6 x 9.5mm Equal Leg Angle	F-P-ELA(102/9.5)	101.6	101.6	9.5	1844.30	3.32	1814196.10	24959.13	31.36	28.91	
101.6 x 12.7mm Equal Leg Angle	F-P-ELA(102/12.7)	101.6	101.6	12.7	2418.75	4.36	2314853.73	32355.97	30.93	30.06	
152.4 x 9.5mm Equal Leg Angle	F-P-ELA(152/9.5)	152.4	152.4	9.5	2811.80	5.07	6404379.33	57818.72	47.72	41.63	
152.4 x 101.6 x 12.7mm Unequal Leg Angle	F-P-UELA(152/102/12.7)	152.4	101.6	12.7	3707.75	6.68	8286266.60	75600.12	47.26	42.79	


Notation		
A	cross section area	mm ²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
l	moment of inertia	mm ⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm ³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Sectional Properties

Sectional Properties – Rectangular Hollow Section

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

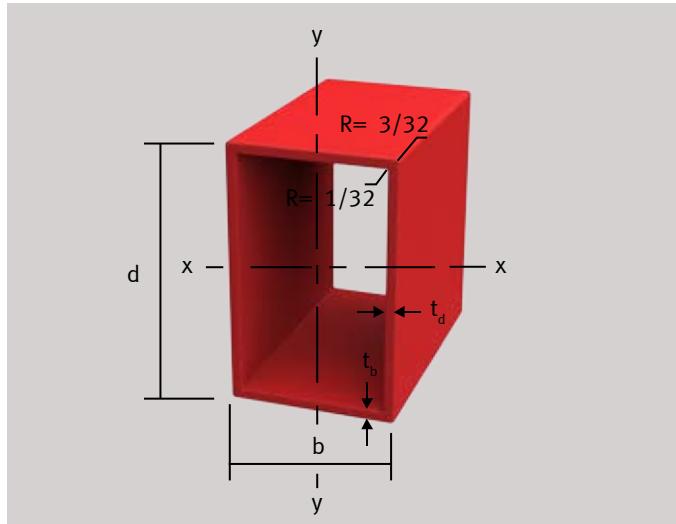

Rectangular Hollow Section		Sectional Dimensions					
Part	Part Number	d mm	b mm	t(d) mm	t(b) mm	Area mm²	Weight Kg./m
38.1 x 19.1 x 3.2mm Rectangular Hollow Section	F-P-RHS(38/19/3.2)	38.1	19.1	3.2	3.2	322.50	0.58
38.1 x 25.4 x 3.2mm Rectangular Hollow Section	F-P-RHS(38/25/3.2)	38.1	25.4	3.2	3.2	362.81	0.65
50.8 x 25.4 x 3.2mm Rectangular Hollow Section	F-P-RHS(51/25/3.2)	50.8	25.4	3.2	3.2	443.44	0.80
101.6 x 25.4 x 3.2mm Rectangular Hollow Section	F-P-RHS(102/25/3.2)	101.6	25.4	3.2	3.2	765.94	1.38
101.6 x 3.2 x 50.8 x 6.4mm Rectangular Hollow Section	F-P-RHS(102/3.2/51/6.4)	101.6	50.8	3.2	6.4	1209.38	2.18
111.1 x 3.2 x 34.9 x 4.8mm Rectangular Hollow Section	F-P-RHS(111/3.2/35/4.8)	111.13	34.93	3.2	4.8	977.58	1.76
139.7 x 8.9 x 6.4mm Rectangular Hollow Section	F-P-RHS(140/9/6.4)	139.70	88.90	6.4	6.4	2741.25	4.94
152.4 x 101.6 x 6.4mm Rectangular Hollow Section	F-P-RHS(152/102/6.4)	152.40	101.60	6.4	6.4	3063.75	5.52

Sectional Properties

Notation		
A	cross section area	mm ²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
I	moment of inertia	mm ⁴
od	outside diametre of tube	mm


Notation		
r	radius of gyration	mm
S	section modulus	mm ³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Rectangular Hollow Section		Section Properties									
Part	Part Number	X - X					Y - Y				
		I mm ⁴	S mm ³	r mm	A mm	I mm ⁴	S mm ³	r mm	A mm	J mm	
38.1 x 19.1 x 3.2mm Rectangular Hollow Section	F-P-RHS(38/19/3.2)	53925.82	2830.75	12.93	7.94	16530.02	1735.44	7.16	80.65	38424.68	
38.1 x 25.4 x 3.2mm Rectangular Hollow Section	F-P-RHS(38/25/3.2)	66255.59	3477.98	13.51	7.94	33737.51	2656.50	9.64	120.97	66944.34	
50.8 x 25.4 x 3.2mm Rectangular Hollow Section	F-P-RHS(51/25/3.2)	138066.35	5435.68	15.95	11.11	7723.04	1216.23	4.61	40.32	22864.28	
101.6 x 25.4 x 3.2mm Rectangular Hollow Section	F-P-RHS(102/25/3.2)	848044.43	16693.79	33.27	23.81	83869.55	6603.90	10.46	120.97	251849.32	
101.6 x 3.2 x 50.8 x 6.4mm Rectangular Hollow Section	F-P-RHS(102/3.2/51/6.4)	1837271.53	36166.76	38.97	22.23	459317.88	18083.38	19.49	564.52	1097485.20	
111.1 x 3.2 x 34.9 x 4.8mm Rectangular Hollow Section	F-P-RHS(111/3.2/35/4.8)	1496449.87	26932.73	39.12	25.40	196946.09	11278.23	14.19	272.18	567843.60	
139.7 x 8.9 x 6.4mm Rectangular Hollow Section	F-P-RHS(140/9/6.4)	7190831.45	102946.76	51.21	63.50	3496777.55	78667.66	35.71	967.74	7128058.80	
152.4 x 101.6 x 6.4mm Rectangular Hollow Section	F-P-RHS(152/102/6.4)	9770599.14	128223.09	56.47	69.85	5140024.53	101181.59	40.95	1129.03	10185432.86	

Sectional Properties

Sectional Properties - Circular Hollow Section

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

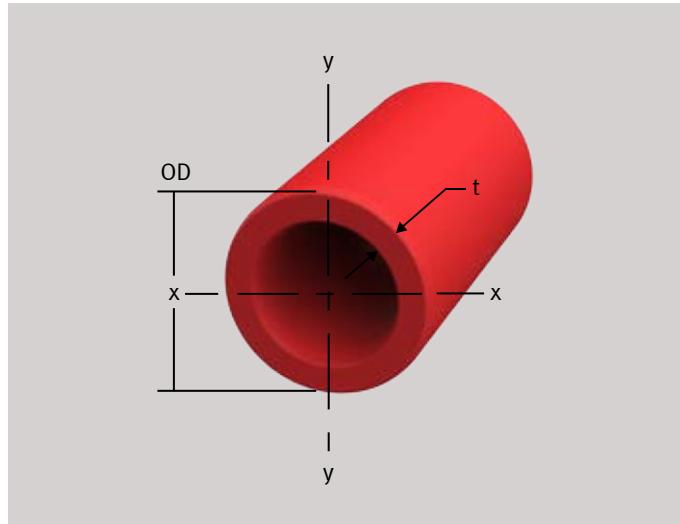

Circular Hollow Section		Sectional Dimensions				Section Properties		
Part	Part Number	od mm	t mm	Area mm²	Weight kg./m	I mm⁴	S mm³	r mm
		Diametre	Wall					
25.4 x 2.4mm Circular Hollow Section	F-P-CHS(25/2.4)	25.4	2.4	174.2	0.33	12487	983	8.1
25.4 x 3.2mm Circular Hollow Section	F-P-CHS(25/3.2)	25.4	3.2	219.4	0.37	12487	1147	7.9
28.6 x 3.2mm Circular Hollow Section	F-P-CHS(29/3.2)	28.6	3.2	251.6	0.49	20812	1475	9.1
31.8 x 2.4mm Circular Hollow Section	F-P-CHS(32/2.4)	31.8	2.4	219.4	0.40	24974	1475	10.4
31.8 x 3.2mm Circular Hollow Section	F-P-CHS(32/3.2)	31.8	3.2	283.9	0.48	29136	1803	10.2
31.8 x 6.4mm Circular Hollow Section	F-P-CHS(32/6.4)	31.8	6.4	509.7	0.91	41623	2786	9.1
38.1 x 3.2mm Circular Hollow Section	F-P-CHS(38/3.2)	38.1	3.2	348.4	0.67	54110	2786	12.4
38.1 x 6.4mm Circular Hollow Section	F-P-CHS(38/6.4)	38.1	6.4	632.3	1.18	83246	4425	11.4
44.5 x 3.2mm Circular Hollow Section	F-P-CHS(45/3.2)	44.5	3.2	412.9	0.76	87409	3933	14.7
44.5 x 6.4mm Circular Hollow Section	F-P-CHS(45/6.4)	44.5	6.4	761.3	1.40	141519	6391	13.7
47.6 x 4.8mm Circular Hollow Section	F-P-CHS(48/4.8)	47.6	4.8	638.7	1.31	149843	6227	15.2
50.8 x 6.4mm Circular Hollow Section	F-P-CHS(51/6.4)	50.8	6.4	883.9	1.61	224765	8849	15.7
76.2 x 6.4mm Circular Hollow Section	F-P-CHS(76/6.4)	76.2	6.4	1393.5	2.53	857437	22450	24.9
76.2 x 12.7mm Circular Hollow Section	F-P-CHS(76/12.7)	76.2	12.7	2535.5	4.43	1327778	34904	22.9


Notation		
A	cross section area	mm²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
l	moment of inertia	mm⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm³
t	thickness	mm
t_b	thickness of width dimension	mm
t_d	thickness of depth dimension	mm
Wt.	weight of section	mm

Sectional Properties

Section Properties - Solid Bars

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

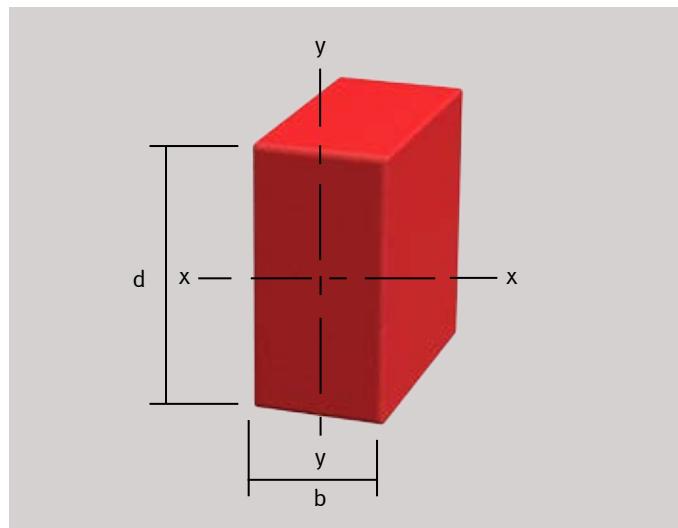

Solid Bars		Section Dimensions						Section Properties			
Part	Part Number	d mm	b mm	Area mm²	Weight Kg./m	X - X			Y - Y		
						l mm⁴	S mm³	r mm	l mm⁴	S mm³	r mm
Square Bar											
25.4mm Square Bar	F-P-SQB(25)	25.4	25.4	645.2	1.31	33299	2786	7.4	33299	2786	7.4
31.8mm Square Bar	F-P-SQB(32)	31.8	31.8	1006.4	2.04	83246	5408	9.1	83246	5408	9.1
38.1mm Square Bar	F-P-SQB(38)	38.1	38.1	1451.6	2.95	174817	9177	10.9	174817	9177	10.9
Rectangular Bar											
19.1 x 38.1mm Rectangular Bar	F-P-REB(19/38.1)	38.1	19.05	725.81	1.31	87798.82	4608.86	11.00	21949.70	2304.43	5.50
25.4 x 38.1mm Rectangular Bar	F-P-REB(25/38.1)	38.10	25.4	967.74	1.74	117065.09	6145.15	11	52028.93	4096.77	7.33
25.4 x 50.8mm Rectangular Bar	F-P-REB(25/50.8)	50.8	12.7	645.16	1.16	138743.81	5462.35	14.66	8671.49	1365.59	3.67


Notation		
A	cross section area	mm²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
l	moment of inertia	mm⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Sectional Properties

Sectional Properties - Circular Round Bar

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

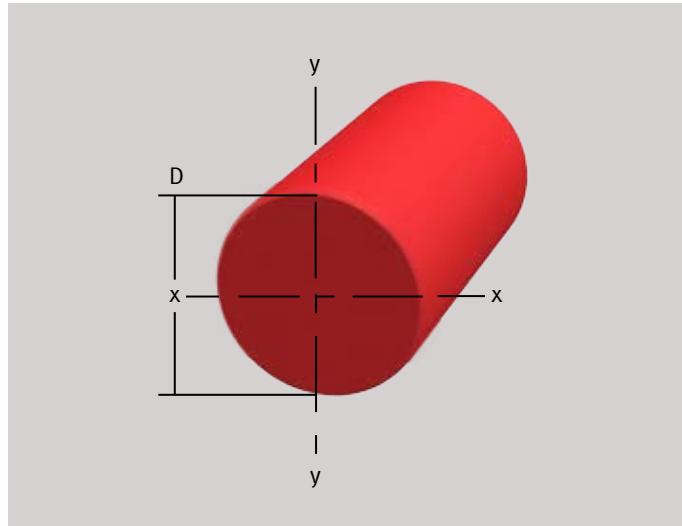

Circular Round Bar		Sectional Dimensions			Section Properties		
Part	Part Number	d mm	Area mm²	Weight Kg./m	I mm⁴	S mm³	r mm
6.4mm Circular Round Bar	F-P-CB(6.4)	6.4	31.6	0.07	83	26	1.6
7.6mm Circular Round Bar	F-P-CB(7.6)	7.6	45.8	0.09	166	44	1.9
7.9mm Circular Round Bar	F-P-CB(7.9)	7.9	49.7	0.1	208	49	2.0
8.9mm Circular Round Bar	F-P-CB(8.9)	8.9	61.9	0.12	291	69	2.2
9.5mm Circular Round Bar	F-P-CB(9.5)	9.5	71.0	0.14	416	85	2.4
11.1mm Circular Round Bar	F-P-CB(11.1)	11.1	96.8	0.20	749	134	2.8
12mm Circular Round Bar	F-P-CB(12)	12.0	112.9	0.22	999	169	3.0
12.2mm Circular Round Bar	F-P-CB(12.2)	12.2	116.8	0.24	1082	179	3.0
12.7mm Circular Round Bar	F-P-CB(12.7)	12.7	126.5	0.26	1290	202	3.2
15.9mm Circular Round Bar	F-P-CB(15.9)	15.9	198.1	0.40	3122	393	4.0
19.1mm Circular Round Bar	F-P-CB(19.1)	19.1	285.2	0.59	6493	678	4.8
20.6mm Circular Round Bar	F-P-CB(20.6)	20.6	334.2	0.68	8907	864	5.2
22.2mm Circular Round Bar	F-P-CB(22.2)	22.2	387.7	0.79	11987	1078	5.6
25.4mm Circular Round Bar	F-P-CB(25.4)	25.4	506.5	1.04	20437	1609	6.4
31.8mm Circular Round Bar	F-P-CB(31.8)	31.8	791.6	163	49865	3141	7.9
38.1mm Circular Round Bar	F-P-CB(38.1)	38.1	1139.4	2.34	103434	5429	9.5


Notation		
A	cross section area	mm²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
l	moment of inertia	mm⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Sectional Properties

Section Properties - Embedment Angle

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

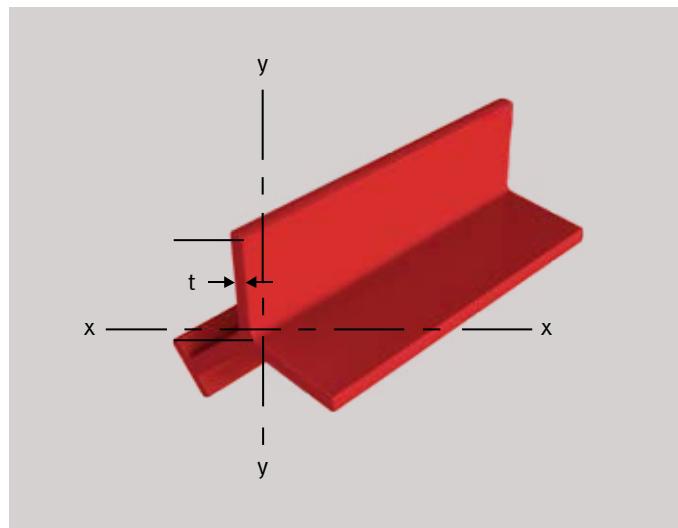

Embedment Angle		Section Dimensions						Section Properties			
Part	Part Number	d mm	t mm	Area mm ²	Weight Kg./m	X - X			Y - Y		
						I mm ⁴	S mm ³	r mm	I mm ⁴	S mm ³	r mm
25.4 x 6.4mm Embedment Angle	F-P-EA(25/6.4)	25.4	6.4	696.8	1.43	116544	4916	12.9	212278	5407	17.5
38.1 x 6.4mm Embedment Angle	F-P-EA(38/6.4)	38.1	6.4	774.2	1.64	212278	5407	16.5	212278	5407	16.5
50.8 x 6.4mm Embedment Angle	F-P-EA(51/6.4)	50.8	6.4	858.1	1.68	366283	8849	20.6	212278	5407	15.7


Notation		
A	cross section area	mm ²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
l	moment of inertia	mm ⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm ³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Sectional Properties

Sectional Properties - Square Hollow Section

The section values shown on this page have been calculated from the nominal dimensions of the profile. All the shapes listed in the table are available but not all are stocked. For information on availability and price, contact Treadwell Group on 1800 246 800.

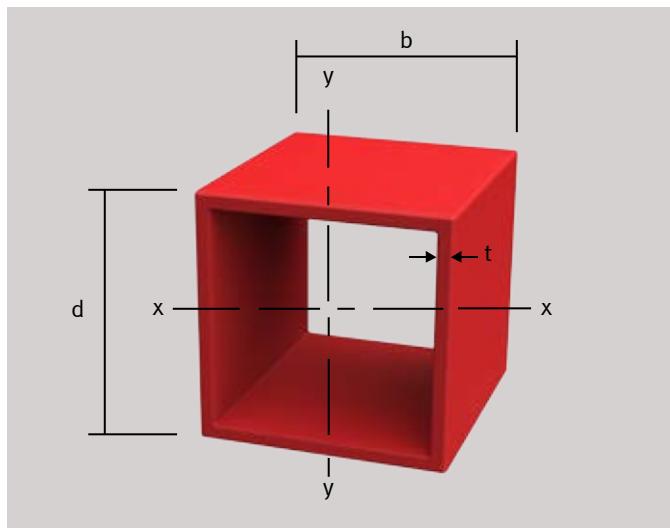

Square Hollow Section		Sectional Dimensions			
Part	Part Number	d mm	t mm	Area mm²	Weight Kg/m
25.4 x 3.2mm Square Hollow Section	F-P-SHS(25/25//3.2)	25.4	3.2	282.19	0.51
25.4 x 6.4mm Square Hollow Section	F-P-SHS(25/25/6.4)	25.4	6.4	483.75	0.87
31.8 x 3.2mm Square Hollow Section	F-P-SHS(3/322/3.2)	31.8	3.2	362.81	0.65
31.8 x 6.4mm Square Hollow Section	F-P-SHS(32/32/6.4)	31.8	6.4	645.00	1.16
38.1 x 3.2mm Square Hollow Section	F-P-SHS(38/38/3.2)	38.1	3.2	443.44	0.80
38.1 x 6.4mm Square Hollow Section	F-P-SHS(38/38/6.4)	38.1	6.4	806.25	1.45
44.5 x 3.2mm Square Hollow Section	F-P-SHS(45/45/3.2)	44.5	3.2	524.06	0.94
44.5 x 6.4mm Square Hollow Section	F-P-SHS(45/45/6.4)	44.5	6.4	967.5	1.74
50.8 x 3.2mm Square Hollow Section	F-P-SHS(51/51/3.2)	50.8	3.2	604.69	1.09
50.8 x 6.4mm Square Hollow Section	F-P-SHS(51/51/6.4)	50.8	6.4	1128.75	2.03
50.8 x 9.6mm Square Hollow Section	F-P-SHS(51/51/9.6)	50.8	9.5	1572.19	2.83
57.2 x 3.2mm Square Hollow Section	F-P-SHS(57/57/3.2)	57.2	3.2	685.31	1.23
76.2 x 3.2mm Square Hollow Section	F-P-SHS(76/76/3.2)	76.2	3.2	927.19	1.67
76.2 x 6.4mm Square Hollow Section	F-P-SHS(76/76/6.4)	76.2	6.4	1773.75	3.20
88.9 x 6.4mm Square Hollow Section	F-P-SHS(89/89/6.4)	88.9	6.4	2096.25	3.78
101.6 x 6.4mm Square Hollow Section	F-P-SHS(102/102/6.4)	101.6	6.4	2418.75	4.36
101.6 x 8mm Square Hollow Section	F-P-SHS(102/102/8)	101.6	8	2995.2	5.32
101.6 x 9.5mm Square Hollow Section	F-P-SHS(102/102/9.5)	101.6	9.5	3507.19	6.32
127 x 8mm Square Hollow Section	F-P-SHS(127/127/8)	127	8	3808	6.48
152.4 x 9.5mm Square Hollow Section	F-P-SHS(152/152/9.5)	152.4	9.5	5442.19	9.81


Sectional Properties

Notation		
A	cross section area	mm ²
b	width of section	mm
d	depth of section / diametre of rod	mm
h	length of angle leg	mm
I	moment of inertia	mm ⁴
od	outside diametre of tube	mm

Notation		
r	radius of gyration	mm
S	section modulus	mm ³
t	thickness	mm
t _b	thickness of width dimension	mm
t _d	thickness of depth dimension	mm
Wt.	weight of section	mm

Square Hollow Section		Section Properties					
Part	Part Number	I mm ⁴	S mm ³	r mm	J mm ⁴	d _w mm ³	a _w mm ²
25.4 x 3.2mm Square Hollow Section	F-P-SHS(25/25//3.2)	23711.08	1867.01	9.17	30498.37	19.05	120.94
25.4 x 6.4mm Square Hollow Section	F-P-SHS(25/25/6.4)	32518.05	2560.47	8.20	32924.52	12.70	161.25
31.8 x 3.2mm Square Hollow Section	F-P-SHS(3/322/3.2)	49996.50	3149.38	11.74	66672.16	25.40	161.25
31.8 x 6.4mm Square Hollow Section	F-P-SHS(32/32/6.4)	73707.57	4642.98	10.69	83246.20	19.05	241.88
38.1 x 3.2mm Square Hollow Section	F-P-SHS(38/38/3.2)	90915.04	4772.43	14.32	123983.52	31.75	201.56
38.1 x 6.4mm Square Hollow Section	F-P-SHS(38/38/6.4)	140911.54	7396.91	13.22	169364.83	25.40	322.5
44.5 x 3.2mm Square Hollow Section	F-P-SHS(45/45/3.2)	149718.51	6736.47	16.90	207309.81	38.10	241.88
44.5 x 6.4mm Square Hollow Section	F-P-SHS(45/45/6.4)	240633.55	10827.13	15.77	301024.21	31.75	403.13
50.8 x 3.2mm Square Hollow Section	F-P-SHS(51/51/3.2)	229658.71	9041.66	19.49	321528.54	44.45	282.19
50.8 x 6.4mm Square Hollow Section	F-P-SHS(51/51/6.4)	379377.21	14936.07	18.33	487973.94	38.10	483.75
50.8 x 9.6mm Square Hollow Section	F-P-SHS(51/51/9.6)	470292.25	18515.39	17.29	544188.24	31.75	604.69
57.2 x 3.2mm Square Hollow Section	F-P-SHS(57/57/3.2)	333987.44	11688.07	22.07	471517.33	50.80	322.5
76.2 x 3.2mm Square Hollow Section	F-P-SHS(76/76/3.2)	825822.90	21675.08	29.84	1184880.57	69.85	443.44
76.2 x 6.4mm Square Hollow Section	F-P-SHS(76/76/6.4)	1454640.63	38179.43	28.63	1983736.35	63.50	806.25
88.9 x 6.4mm Square Hollow Section	F-P-SHS(89/89/6.4)	2395496.12	53891.77	33.80	3316956.92	76.20	967.5
101.6 x 6.4mm Square Hollow Section	F-P-SHS(102/102/6.4)	3674539.30	72333.24	38.97	5144456.63	89.90	1128.75
101.6 x 8mm Square Hollow Section	F-P-SHS(102/102/8)	4405420.03	86720.87	38.35	7173310.30	85.6	1369.6
101.6 x 9.5mm Square Hollow Section	F-P-SHS(102/102/9.5)	5009811.60	98618.05	37.79	6738104.51	82.55	1572.19
127 x 8mm Square Hollow Section	F-P-SHS(127/127/8)	9028133.33	142175.33	48.69	14452895	111	1776
152.4 x 9.5mm Square Hollow Section	F-P-SHS(152/152/9.5)	18602355.19	244124.69	58.46	26043811.71	133.35	2539.69

Beams - Allowable Uniforms Loads

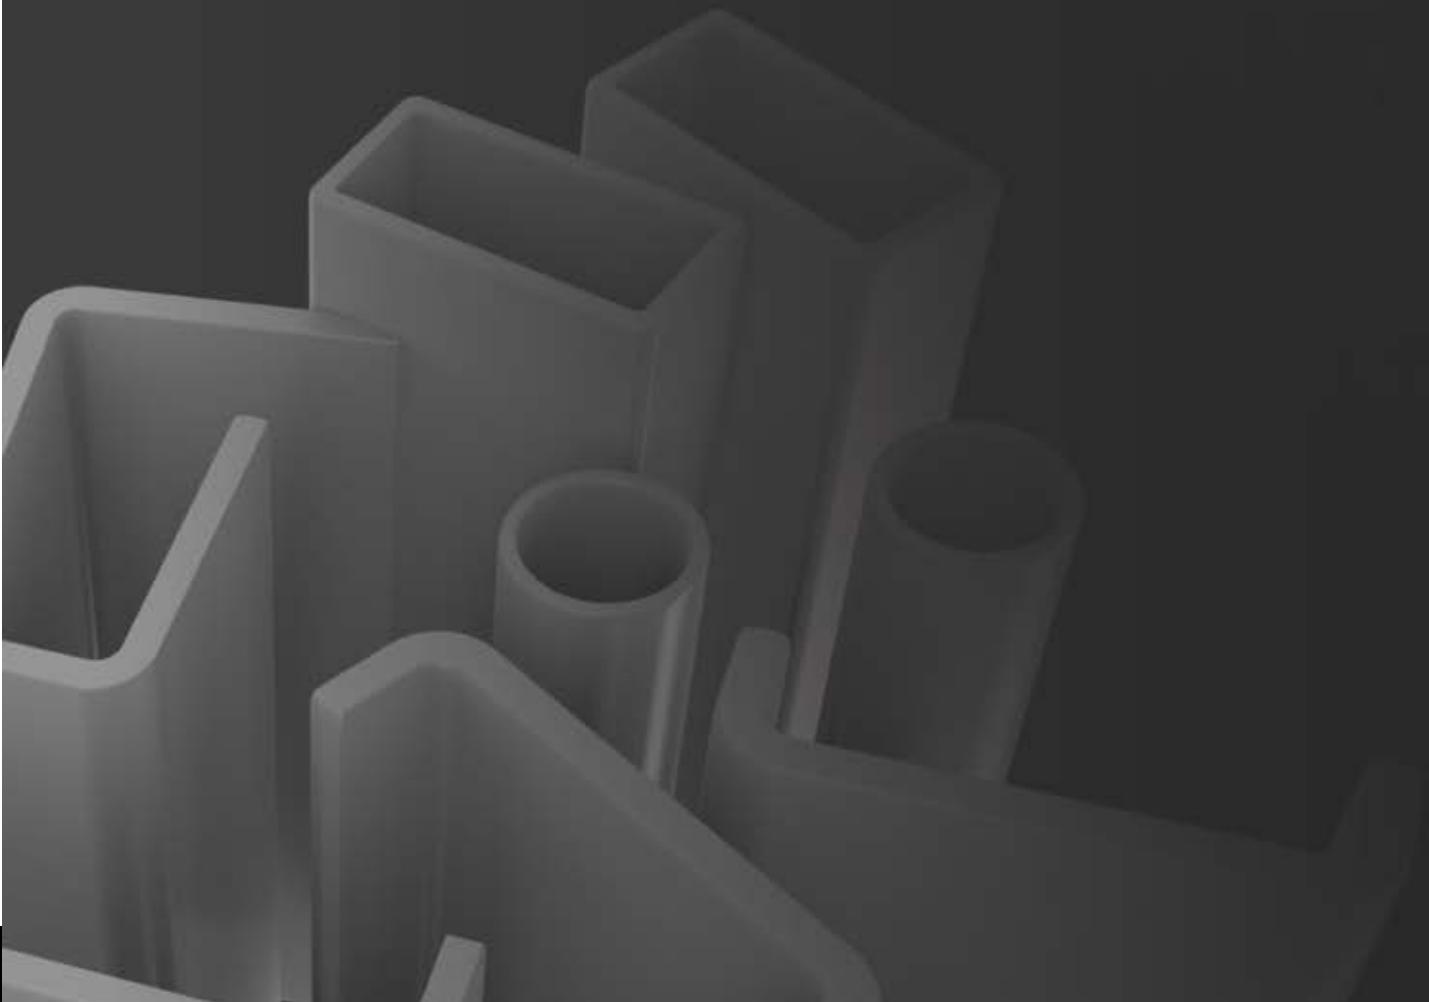

Beams - Allowable Uniform Loads

Allowable Uniform Load Tables

Full section 3-point bending tests were conducted on Treadwell Reinforced Plastics' H-Beams, I-Beams, C Section and Square Hollow Section. The allowable uniform load tables were generated using these tests results as well as the formulas, properties, and assumptions listed below. Formulas for critical buckling and lateral-torsional buckling developed from theory are presented in Chapter 6 and 7 of the ASCE Structural Plastics Design Manual.

Notation	
A_w	area of web (in. ² / mm. ²)
b	flange width (in. / mm.)
b_c	C Section flange minus thickness (in. / mm.)
b_h	1/2 of flange width (in. / mm.)
d	depth of section (in. / mm.)
E	modulus of elasticity (lbs. / in. ² / GPa)
f_b	actual flexural stress (lbs. / in. ² / MPa)
F_b	maximum allowable flexural stress (lbs. / in. ² / MPa)
F_{aCB}	maximum allowable buckling stress (lbs. / in. ² / MPa)
F_{aLTB}	maximum allowable lateral-torsional buckling stress (lbs. / in. ² / MPa)
f_v	actual shear stress (lbs. / in. ² / MPa)
F_v	maximum allowable shear stress (lbs. / in. ² / MPa)
G	shear modulus (lbs. / in. ² / GPa)
I	moment of inertia (in. ⁴ / mm. ⁴)
J	torsion constant (in. ⁴ / mm. ⁴)
L	length of span (in. / mm.)
M	maximum moment (lbs.-in. / N.m.)
S_x	section modulus (in. ³ / mm ³)
t	flange thickness (in. / mm.)
V	vertical shear force (lbs. / N.)
w	uniform load (lbs./in. / N/m.)
v_t	poission's ratio (longitudinal)
v_r	poission's ratio (transverse)

Assumptions

- Beam simply supported at both ends
- Uniformly distributed load
- Load is applied perpendicular to major axis
- Part weight has been deducted in tables
- Safety factor of 3.0 for both ultimate material flexural and shear stress and 2.5 for buckling stresses

Beams - Allowable Uniform Loads

Properties / Allowables	Formulas
$E = 2.8 \times 10^6 \text{ lbs./in.}^2$ $E = 19.3 \text{ GPa}$	$\Delta = \frac{5wL^4}{384EI} + \frac{wL^2}{8A_wG}$
$G = 450,000 \text{ lbs. /in.}^2$ $G = 3.1 \text{ GPa}$	$f_b = \frac{M}{S_x}$
$F_b = 10,000 \text{ lbs./in}^2$ $F_b = 68.9 \text{ MPa}$	
$F_v = 1500 \text{ lbs./in}^2$ $F_v = 10.3 \text{ MPa}$	$f_v = \frac{V}{A_w}$

Allowable Critical Buckling Stress for laterally supported WF and I Beams

$$F_{acb} = \frac{\pi^2}{b_h^2 t} \left[.935 \sqrt{\left(\frac{Et^3}{12\lambda} \right) \left(\frac{V_t Et^3}{12\lambda} \right)} - (.656) \left(\frac{V_t Et^3}{12\lambda} \right) + (2.082) \left(\frac{Gt^3}{12} \right) \right] / 2.5$$

$$\lambda = (1 - V_L V_T)$$

Allowable Lateral-Torsional Buckling Stress for laterally unsupported WF and I Beams

$$F_{altb} = \left[\frac{C \pi}{S(KL)} \sqrt{EI_y GJ + \frac{d^2 \pi^2 E^2 I_y^2}{(4)(KL)^2}} \right] / 2.5$$


C = 1.13 and K = 1.0 for uniform load simple beam*

Allowable Critical Buckling Stress for C Sections laterally supported to eliminate warping and twist

$$F_{acb} = G(t/b_c)^2 / 2.5$$

Allowable Bending Stress for Square Tube (b/t <= 16)

$$F_b = 10,000 \text{ psi.}$$

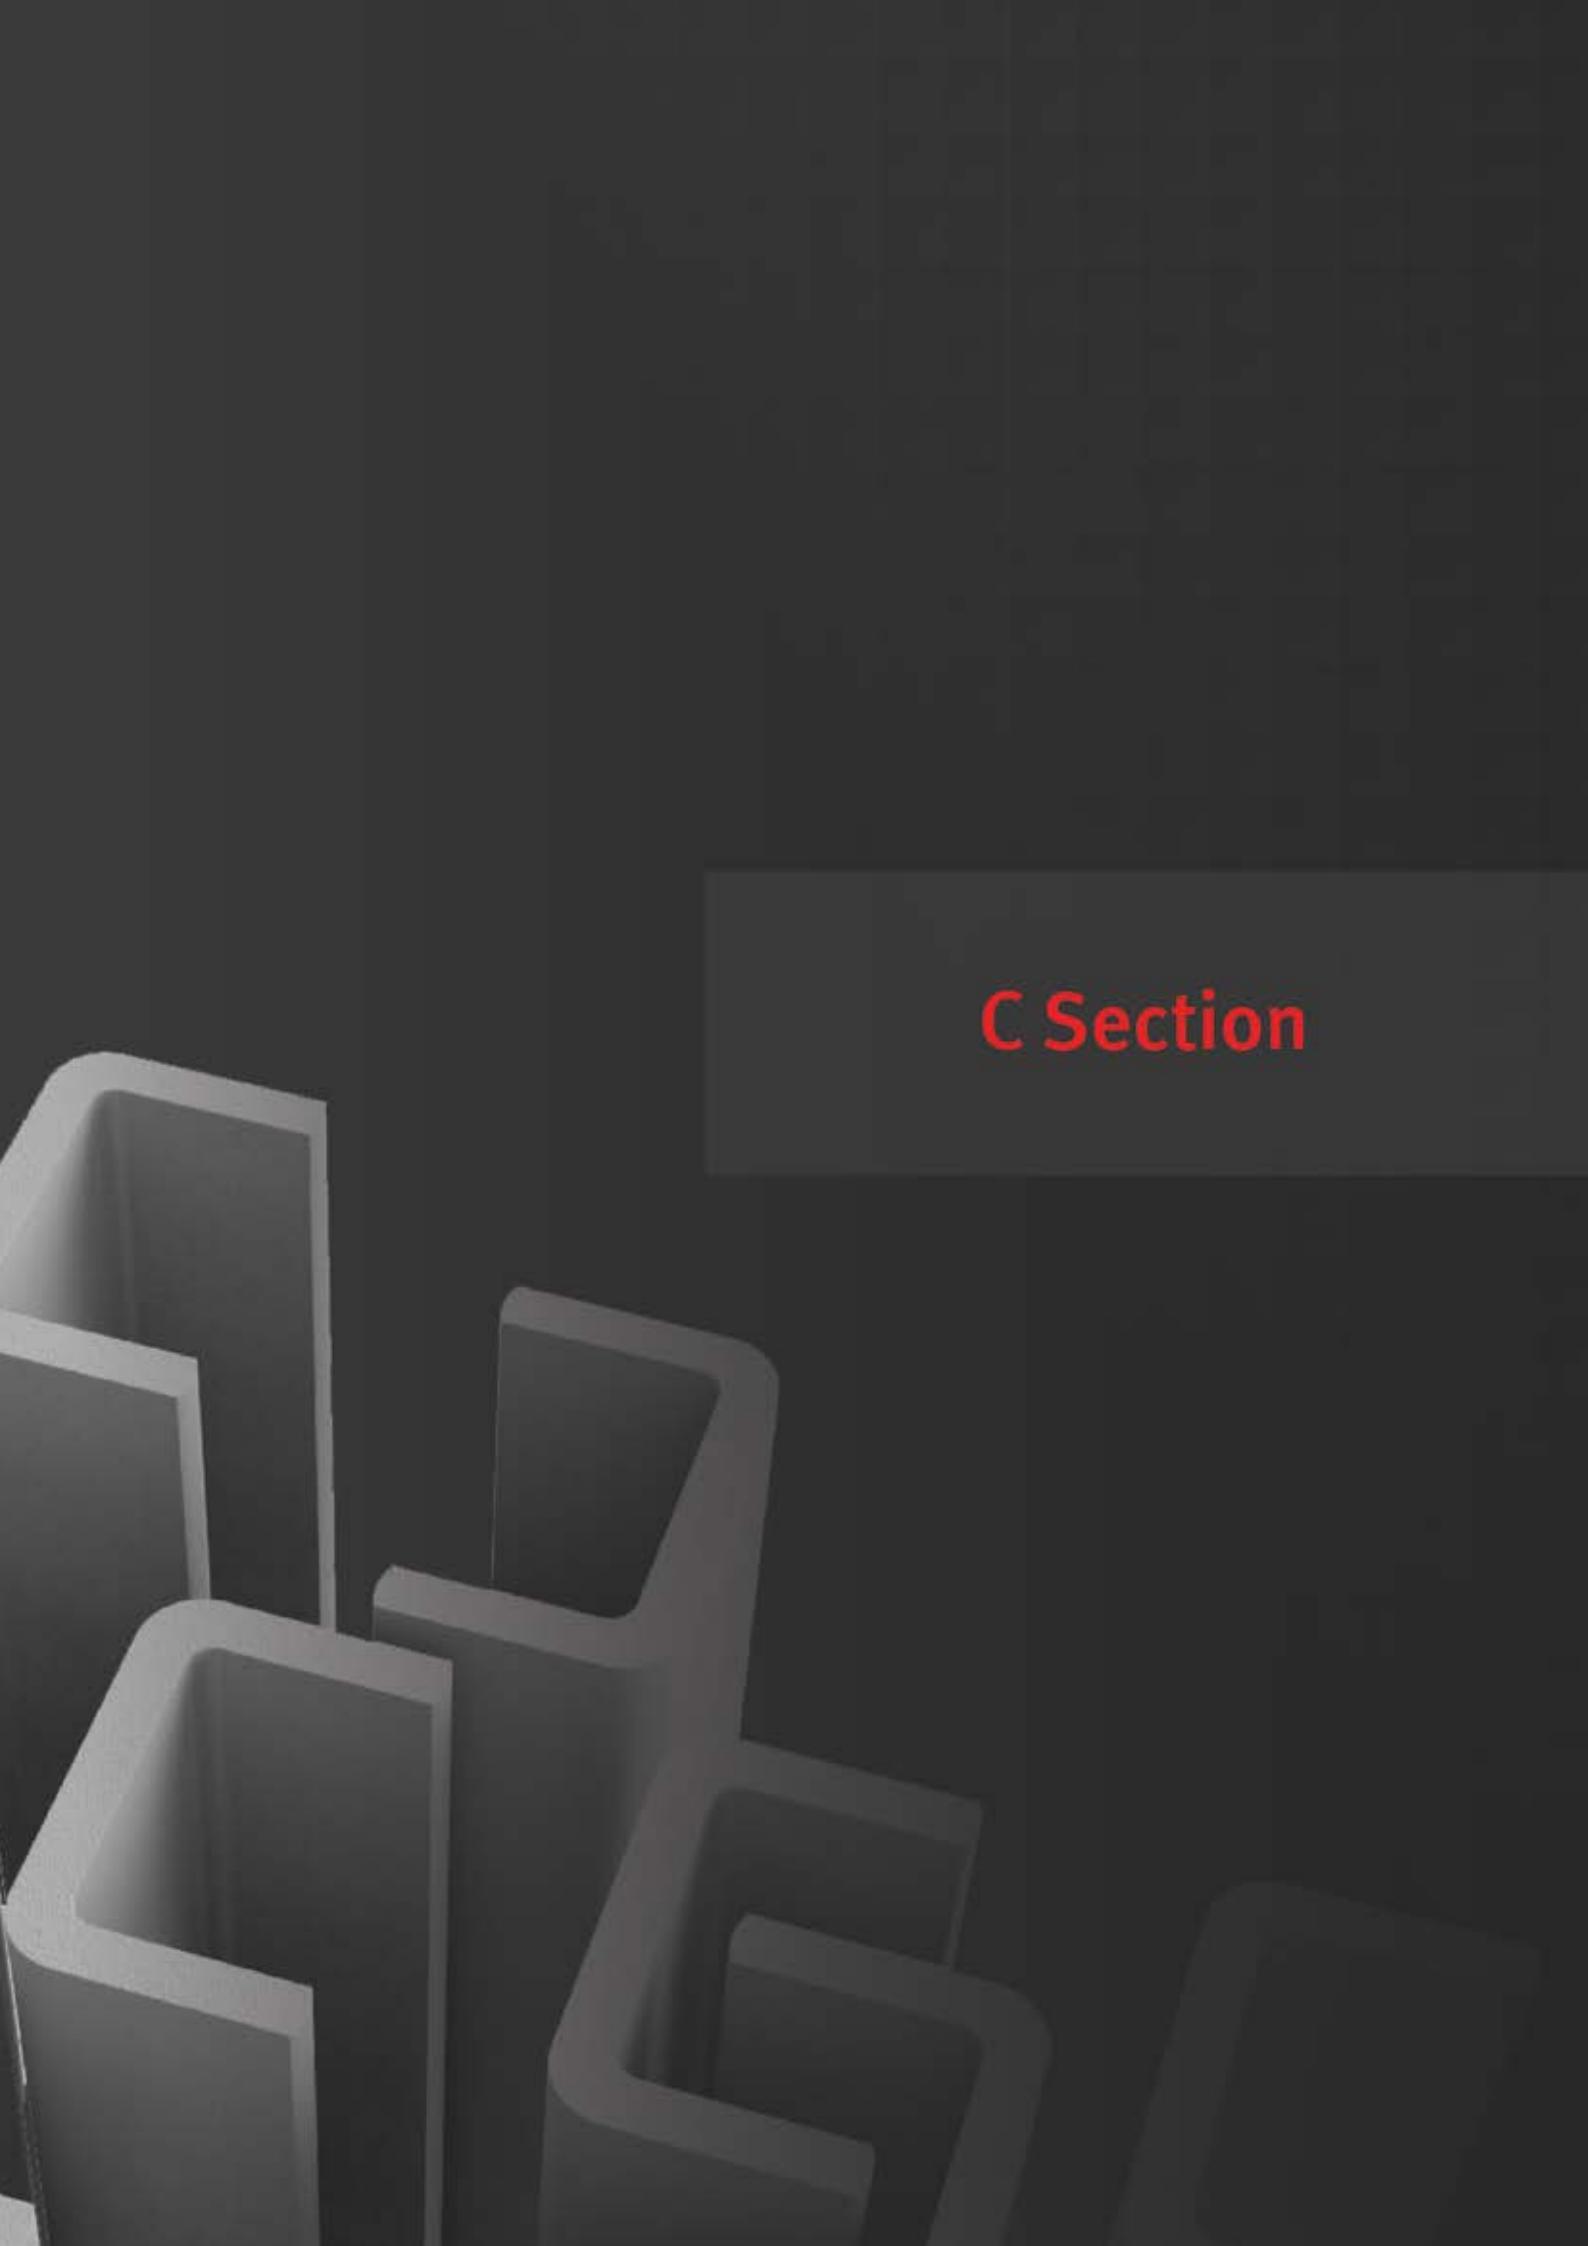


C Section

Beams - Allowable Uniform Loads

Part: 76.2 x 25.4 x 6.4mm C Section

Part Number: F-P-CS(76/25/6.4)




A_w	403.2mm ²	Wt.	1.18kg/m
I	528614mm ⁴	S	13929mm ³

Span (m)	Maximum Load (N/m)	Deflection (N/m)				
		L/100	L/150	L/180	L/240	L/360
0.91	9110	F_v	8622	5744	4785	3586
1.22	5157	F_b	3901	2597	2162	1619
1.52	3296	F_b	2063	1371	1141	853
1.83	2286	F_b	1213	805	669	498
2.13	1676	F_b	769	509	422	314
2.44	1281	F_b	515	340	281	208
2.74	1009	F_b	360	236	195	143
3.05	815	F_b	261	170	140	102
Part weight has been deducted in this table.						

Part: 76.2 x 38.1 x 6.4mm C Section


Part Number: F-P-CS(76/38/6.4)

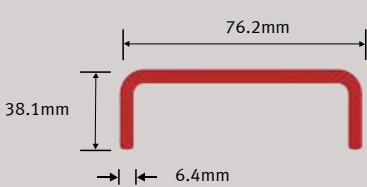


A_w	403.2mm ²	Wt.	1.50kg/m
I	728405mm ⁴	S	19009mm ³

Span (m)	Maximum Load (N/m)	Deflection (N/m)				
		L/100	L/150	L/180	L/240	L/360
0.91	8999	F_v	----	7456	6208	4649
1.22	5049	F_v	----	3440	2862	2139
1.52	3221	F_b	2763	1832	1522	1134
1.83	2228	F_b	1629	1077	892	662
2.13	1629	F_b	1032	679	561	413
2.44	1240	F_b	690	450	370	270
2.74	974	F_b	479	310	253	183
3.05	783	F_b	340	219	178	126
Part weight has been deducted in this table.						

Beams - Allowable Uniform Loads

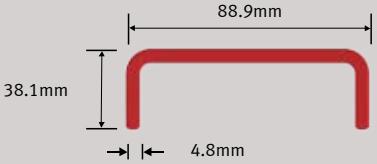
Part: 88.9 x 38.1 x 4.8mm C Section						
Part Number: F-P-CS(89/38/4.8)						
	A_w	348.3mm^2	Wt.	1.28kg/m	I	799164mm^4
S	18026mm^3					
Span (m)	Maximum Load (N/m)	Deflection (N/m)				
	L/100	L/150	L/180	L/240	L/360	
0.91	4353	F_v	----	----	----	----
1.22	2442	F_v	----	----	----	2286
1.52	1558	F_b	----	----	----	1233
1.83	1077	F_b	----	----	980	731
2.13	788	F_b	----	753	625	465
2.44	600	F_b	----	506	419	311
2.74	471	F_b	----	355	293	216
3.05	378	F_b	----	256	211	155
3.35	310	F_b	292	190	156	113
3.66	258	F_b	223	144	117	84
Part weight has been deducted in this table.						51

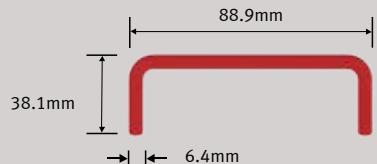Part: 88.9 x 38.1 x 6.4mm C Section						
Part Number: F-P-CS(89/38/6.4)						
	A_w	483.8mm^2	Wt.	1.74kg/m	I	994793mm^4
S	22450mm^3					
Span (m)	Maximum Load (N/m)	Deflection (N/m)				
	L/100	L/150	L/180	L/240	L/360	
3	727	F_b	----	680	566	425
4	409	F_b	----	318	265	198
5	261	F_b	257	171	142	106
6	181	F_b	153	101	84	63
7	133	F_b	98	65	54	40
8	101	F_b	66	43	36	27
9	80	F_b	46	30	25	19
Part weight has been deducted in this table.						12

Beams - Allowable Uniform Loads

Part: 101.6 x 28.6 x 6.4mm C Section

Part Number: F-P-CS(102/29/6.4)

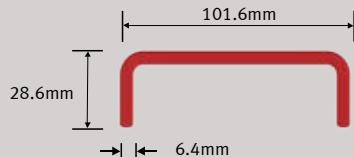


A_w	564.5mm ²	Wt.	1.56kg/m
I	1194584mm ⁴	S	23597mm ³

Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
0.91	12755	F_v	----	11843	9867	7396	4926
1.22	7767	F_b	----	5553	4625	3465	2305
1.52	4965	F_b	4497	2993	2492	1865	1238
1.83	3444	F_b	2677	1779	1480	1106	733
2.13	2526	F_b	1712	1136	944	705	465
2.44	1930	F_b	1156	766	636	473	310
2.74	1522	F_b	815	538	446	331	215
3.05	1230	F_b	594	391	323	238	154

Part weight has been deducted in this table.

Part: 101.6 x 34.9 x 4.8mm C Section

Part Number: F-P-CS(102/35/4.8)

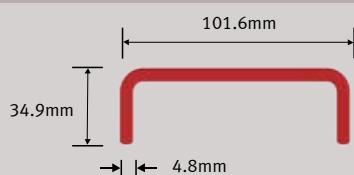


A_w	438.7mm ²	Wt.	1.31kg/m
I	1090526mm ⁴	S	21467mm ³


Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
0.91	6343	F_v	----	----	----	----	4322
1.22	3562	F_v	----	----	----	3086	2053
1.52	2275	F_b	----	----	2237	1675	1112
1.83	1576	F_b	----	----	1336	999	662
2.13	1154	F_b	----	1029	855	638	421
2.44	881	F_b	----	695	577	430	282
2.74	693	F_b	----	490	406	301	196
3.05	559	F_b	540	356	295	218	141

Part weight has been deducted in this table.


Beams - Allowable Uniform Loads

Part: 139.7 x 38.1 x 6.4mm C Section						
Part Number: F-P-CS(140/38/6.4)						
			A_w	846.7mm ²	Wt.	2.22kg/m
			I	3071788mm ⁴	S	43917mm ³
Major Axis (N/m)						
Span (m)	Maximum Load (N/m)	F_v	Deflection (N/m)			
			L/100	L/150	L/180	L/240
0.91	19127	F_v	---	---	---	16318
1.22	11722	F_v	---	---	10781	8078
1.52	7491	F_b	---	7200	5995	4489
1.83	5193	F_b	---	4365	3633	2717
2.13	3808	F_b	---	2825	2349	1755
2.44	2908	F_b	2899	1923	1597	1191
2.74	2292	F_b	2057	1362	1130	840
3.05	1851	F_b	1507	995	825	611
3.35	1525	F_b	1134	746	617	456
3.66	1276	F_b	872	572	472	346
3.96	1083	F_b	683	446	367	268
4.27	930	F_b	543	352	289	209
4.57	806	F_b	438	282	230	165
Minor Axis (N/m)						
A_w	361.2mm ²		Wt.	2.22 kg/m		
I	133194mm ⁴		S	4752mm ³		
Span (m)	Maximum Load (N/m)	F_b	Deflection (N/m)			
			L/100	L/150	L/180	L/240
0.91	3073	F_b	2425	1607	1334	993
1.22	1716	F_b	1029	676	559	412
1.52	1088	F_b	518	336	275	199
1.83	746	F_b	289	183	148	104
Part weight has been deducted in this table.						

Beams - Allowable Uniform Loads

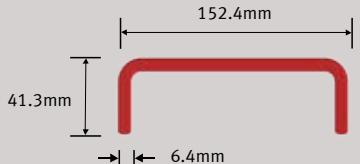
Part: 152.4 x 41.3 x 6.4mm C Section						
Part Number: F-P-CS(152/41/6.4)						
			A_w	887.1mm ²	Wt.	2.49kg/m
			I	4237236mm ⁴	S	5552mm ³
Span (m)		Maximum Load (N/m)	Deflection (N/m)			
			L/100	L/150	L/180	L/240
1.52	7820	F_v	----	----	----	5908
1.83	5422	F_b	----	----	4845	3627
2.13	3976	F_b	----	3803	3164	2366
2.44	3037	F_b	----	2607	2167	1618
2.74	2394	F_b	----	1857	1542	1149
3.05	1933	F_b	----	1364	1132	842
3.35	1593	F_b	1557	1028	852	632
3.66	1334	F_b	1202	792	655	484
3.96	1132	F_b	945	620	512	377
4.27	972	F_b	755	493	406	297
4.57	843	F_b	611	397	326	237

Part weight has been deducted in this table.

Part: 152.4 x 42.9 x 9.5mm C Section						
Part Number: F-P-CS(152/43/9.5)						
			A_w	1270.3mm ²	Wt.	3.87kg/m
			I	6056167mm ⁴	S	79477mm ³
Span (m)		Maximum Load (N/m)	Deflection (N/m)			
			L/100	L/150	L/180	L/240
1.52	17199	F_v	----	13538	11274	8445
1.83	13063	F_b	12500	8319	6925	5183
2.13	9586	F_b	8173	5434	4521	3380
2.44	7329	F_b	5608	3724	3096	2311
2.74	5782	F_b	4000	2652	2203	1641
3.05	4675	F_b	2944	1948	1616	1201
3.35	3856	F_b	2224	1468	1216	901
3.66	3233	F_b	1716	1130	934	690
3.96	2748	F_b	1349	885	730	537
4.27	2364	F_b	1077	703	579	423
4.57	2053	F_b	871	566	464	337

Part weight has been deducted in this table.


Beams - Allowable Uniform Loads

Part: 203.2 x 55.6 x 9.5mm C Section								
Part Number: F-P-CS(203/56/9.5)								
				A _w	1754mm ²	Wt.	4.76kg/m	
				I	14888598mm ⁴	S	146500mm ³	
Span (m)	Maximum Load (N/m)	Deflection (N/m)						
		L/100	L/150	L/180	L/240	L/360		
1.52	23752	F _v	----	----	----	18030	12001	
1.83	18545	F _v	----	18405	15327	11481	7634	
2.13	13610	F _v	----	12333	10268	7686	5105	
2.44	10406	F _b	----	8613	7168	5361	3555	
2.74	8210	F _b	----	6224	5177	3868	2559	
3.05	6639	F _b	----	4627	3846	2870	1894	
3.35	5477	F _b	5314	3523	2926	2180	1434	
3.66	4593	F _b	4135	2737	2271	1689	1106	
3.96	3905	F _b	3275	2164	1793	1330	867	
4.27	3359	F _b	2633	1736	1437	1063	689	
4.57	2918	F _b	2145	1410	1165	860	554	
4.88	2558	F _b	1767	1159	956	702	449	
5.18	2259	F _b	1471	961	791	579	366	
5.49	2009	F _b	1235	804	660	480	301	
5.79	1797	F _b	1045	677	555	401	248	
6.10	1616	F _b	890	574	469	337	205	
Part weight has been deducted in this table.								

Beams - Allowable Uniform Loads

Part: 254 x 69.6 x 12.7mm C Section

Part Number: F-P-CS(254/70/12.7)

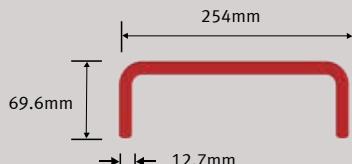


A_w	2903.2mm ²	Wt.	7.89kg/m
I	38497245mm ⁴	S	303161mm ³

Span (m)	Maximum Load (N/m)	Deflection (N/m)				
		L/100	L/150	L/180	L/240	L/360
1.83	27278	F_v	---	---	---	26298
2.13	23369	F_v	---	---	---	18077
2.44	20437	F_v	---	---	17183	12865
2.74	18156	F_v	---	15140	12602	9430
3.05	15910	F_b	---	11393	9479	7088
3.35	13133	F_b	---	8762	7287	5443
3.66	11022	F_b	10347	6866	5707	4258
3.96	9378	F_b	8246	5468	4542	3385
4.27	8074	F_b	6670	4418	3667	2728
4.57	7022	F_b	5464	3614	2997	2226
4.88	6161	F_b	4526	2988	2476	1835
5.18	5448	F_b	3787	2495	2065	1527
5.49	4850	F_b	3196	2101	1737	1281
5.79	4344	F_b	2719	1783	1471	1082
6.10	3912	F_b	2329	1523	1255	919
6.40	3540	F_b	2008	1309	1077	786
6.71	3218	F_b	1741	1132	928	674
7.01	2936	F_b	1517	982	804	581
7.32	2690	F_b	1329	857	699	503
7.62	2472	F_b	1168	750	610	436

Part weight has been deducted in this table.


Beams - Allowable Uniform Loads

Part: 292 x 69.9 x 12.7mm C Section								
Part Number: F-P-CS(292/70/12.7)								
				A_w	3387.1mm ²	Wt.	9.04kg/m	
				I	51862436mm ⁴	S	315007mm ³	
Span (m)		Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.83		31822 F_v		---	---	---	---	22472
2.13		27261 F_v		---	---	---	23429	15585
2.44		23841 F_v		---	---	22430	16797	11164
2.74		21181 F_v		---	19875	16545	12383	8222
3.05		18635 F_b		---	15023	12502	9351	6200
3.35		15383 F_b		---	11596	9646	7209	4772
3.66		12910 F_b		---	9114	7578	5658	3738
3.96		10985 F_b		10968	7278	6048	4510	2973
4.27		9458 F_b		8891	5893	4894	3645	2396
4.57		8225 F_b		7296	4830	4008	2981	1953
4.88		7217 F_b		6054	4002	3318	2463	1608
5.18		6381 F_b		5072	3348	2773	2054	1335
5.49		5681 F_b		4287	2824	2336	1727	1117
5.79		5088 F_b		3652	2401	1984	1462	941
6.10		4582 F_b		3133	2055	1695	1246	796
6.40		4147 F_b		2705	1769	1457	1067	678
6.71		3769 F_b		2348	1532	1259	919	579
7.01		3440 F_b		2050	1332	1093	794	496
7.32		3151 F_b		1797	1164	953	689	425
7.62		2896 F_b		1583	1021	834	600	366
Part weight has been deducted in this table.								

Beams - Allowable Uniform Loads

Part: 304.8 x 76.2 x 12.7mm C Section

Part Number: F-P-CS(305/76/12.7)

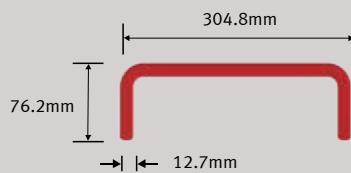 A_w 3548.4mm²

Wt.

9.68kg/m

I

59729209mm⁴

S

391651mm³

Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
1.83	33342	F_v	---	---	---	---	25014
2.13	28564	F_v	---	---	---	26248	17465
2.44	24981	F_v	---	---	---	18916	12577
2.74	20565	F_v	---	---	18705	14003	9301
3.05	16638	F_v	---	---	14181	10610	7039
3.35	13733	F_v	---	13185	10971	8202	5434
3.66	11523	F_b	---	10387	8639	6453	4268
3.96	9803	F_b	---	8310	6908	5156	3403
4.27	8439	F_b	---	6740	5600	4174	2749
4.57	7338	F_b	---	5533	4594	3420	2246
4.88	6437	F_b	---	4591	3809	2831	1853
5.18	5690	F_b	---	3846	3188	2365	1543
5.49	5065	F_b	4924	3249	2690	1992	1294
5.79	4535	F_b	4199	2766	2288	1690	1093
6.10	4083	F_b	3606	2370	1958	1443	928

Part weight has been deducted in this table.


A dark gray background featuring a stack of light gray I-beam profiles arranged diagonally from bottom-left to top-right.

I-Beam

Beams - Allowable Uniform Loads

Part: 76.2 x 38.1 x 6.4mm I-Beam

Part Number: F-P-IS(76/38/6.4)

 A_w 403.2mm²

Wt.

1.64kg/m

I

728405mm⁴

S


19173mm³

Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.22	1488	6825	F_v	5188	3453	2875	2152	1429
1.52	724	4537	F_b	2776	1845	1535	1147	759
1.83	403	3146	F_b	1643	1090	905	675	445
2.13	244	2307	F_b	1046	692	574	426	279
2.44	156	1762	F_b	703	463	383	283	184
2.74	104	1389	F_b	493	323	266	196	125
3.05	71	1122	F_b	357	232	191	139	87

Part weight has been deducted in this table.

Part: 88.9 x 38.1 x 4.7mm I-Beam

Part Number: F-P-IS(89/38/4.7)

 A_w 377.4mm²

Wt.

1.31kg/m

I

836625mm⁴


S


18845mm³

Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.22	984	6388	F_b	5795	3858	3213	2406	1599
1.52	461	4460	F_b	3131	2083	1733	1296	859
1.83	249	3093	F_b	1865	1238	1029	768	507
2.13	146	2269	F_b	1192	790	656	488	321
2.44	91	1733	F_b	804	531	440	327	213
2.74	59	1367	F_b	566	372	308	227	147
3.05	38	1104	F_b	411	269	222	163	104

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads


Part: 101.6 x 50.8 x 6.4mm I-Beam							
Part Number: F-P-IS(102/51/6.4)							
				A _w	564.5mm ²	Wt.	2.23kg/m
				I	1835581mm ⁴	S	36215mm ³
Span (m)		No Lateral Support	Maximum Load (N/m)		Deflection (N/m)		
		Max. Load (N/m)			L/100	L/150	L/180
1.22	3265	9555	F _v	----	7915	6592	4939
1.52	1514	7640	F _v	6565	4369	3638	2723
1.83	817	5950	F _b	3965	2636	2193	1639
2.13	486	4366	F _b	2560	1699	1412	1054
2.44	310	3337	F _b	1740	1153	957	712
2.74	207	2632	F _b	1232	814	675	500
3.05	142	2128	F _b	901	593	491	362
3.35	100	1755	F _b	676	443	366	269
3.66	71	1471	F _b	519	338	278	203
Part weight has been deducted in this table.							

Part: 139.7 x 63.5 x 6.4mm I-Beam							
Part Number: F-P-IS(140/64/6.4)							
				A _w	806mm ²	Wt.	2.86kg/m
				I	4665954mm ⁴	S	66859.00mm ³
Span (m)		No Lateral Support	Maximum Load (N/m)		Deflection (N/m)		
		Max. Load (N/m)			L/100	L/150	L/180
1.22	7034	13654	F _v	----	----	----	10829
1.52	3874	10917	F _v	----	10013	8340	6248
1.83	2010	9093	F _v	----	6221	5179	3878
2.13	1164	7262	F _b	6156	4094	3407	2549
2.44	728	5554	F _b	4247	2822	2347	1753
2.74	482	4382	F _b	3041	2018	1677	1251
3.05	332	3544	F _b	2246	1488	1235	919
3.35	236	2924	F _b	1701	1125	933	692
3.66	171	2453	F _b	1316	868	719	532
3.96	126	2086	F _b	1037	682	564	416
4.27	94	1795	F _b	830	544	449	329
4.57	70	1560	F _b	673	439	361	264
Part weight has been deducted in this table.							

Beams - Allowable Uniform Loads

Part: 152.4 x 76.2 x 6.4mm I-Beam

Part Number: F-P-IS(152/76/6.4)




A_w	887.1mm ²	Wt.	3.27kg/m
I	7071772mm ⁴	S	92751mm ³

Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.52	5307	12008	F_v	----	----	11083	8304	5525
1.83	2689	10001	F_v	----	8400	6995	5238	3481
2.13	1524	8568	F_v	8403	5591	4654	3483	2311
2.44	936	7493	F_v	5844	3885	3232	2416	1600
2.74	610	6321	F_v	4211	2796	2325	1736	1146
3.05	415	5114	F_b	3124	2072	1721	1283	845
3.35	292	4221	F_b	2376	1573	1306	971	637
3.66	210	3542	F_b	1845	1219	1011	750	489
3.96	154	3013	F_b	1458	961	796	589	382
4.27	114	2594	F_b	1170	769	636	469	302
4.57	84	2255	F_b	951	623	514	377	241

Part weight has been deducted in this table.

Part: 152.4 x 76.2 x 9.5mm I-Beam

Part Number: F-P-IS(152/76/9.5)




A_w	1270mm ²	Wt.	4.76kg/m
I	9302772mm ⁴	S	122084mm ³

Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.52	9256	17195	F_v	----	----	15678	11747	7816
1.83	4860	14321	F_v	----	11870	9884	7401	4918
2.13	2847	12268	F_v	11865	7894	6571	4916	3262
2.44	1801	10729	F_v	8246	5482	4561	3409	2257
2.74	1206	8901	F_b	5939	3944	3279	2447	1616
3.05	842	7201	F_b	4405	2921	2426	1808	1190
3.35	607	5943	F_b	3349	2217	1840	1368	896
3.66	449	4986	F_b	2599	1717	1423	1056	688
3.96	338	4242	F_b	2053	1353	1120	828	537
4.27	258	3651	F_b	1647	1082	894	659	424
4.57	199	3174	F_b	1339	877	723	530	338
4.88	154	2784	F_b	1100	718	591	431	272
5.18	120	2461	F_b	913	593	487	353	220
5.49	93	2190	F_b	765	494	404	291	179

Part weight has been deducted in this table.


Beams - Allowable Uniform Loads

Part: 203.2 x 101.6 x 9.5mm I-Beam									
Part Number: F-P-IS(203/102/9.5)									
					A_w	1754mm ²	Wt.	6.4kg/m	
					I	23121656mm ⁴	S	227616mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)					
				L/100	L/150	L/180	L/240	L/360	
1.22	29698	29698	F_v	----	----	----	----	25452	
1.52	23746	23746	F_v	----	----	----	----	15970	
1.83	12217	19778	F_v	----	----	----	15815	10522	
2.13	6880	16943	F_v	----	----	14506	10864	7222	
2.44	4210	14818	F_v	----	12400	10323	7727	5130	
2.74	2741	13164	F_v	----	9093	7567	5659	3752	
3.05	1872	11841	F_v	10289	6838	5688	4250	2813	
3.35	1327	10759	F_v	7915	5256	4370	3261	2153	
3.66	969	9321	F_b	6205	4116	3420	2549	1678	
3.96	724	7933	F_b	4945	3276	2720	2024	1328	
4.27	551	6831	F_b	3998	2644	2193	1629	1065	
4.57	426	5943	F_b	3273	2161	1790	1327	864	
4.88	332	5216	F_b	2709	1785	1477	1092	707	
5.18	261	4613	F_b	2265	1489	1230	907	584	
5.49	206	4108	F_b	1910	1252	1033	759	485	
5.79	163	3680	F_b	1623	1061	874	640	406	
6.10	129	3315	F_b	1389	905	744	542	341	
Part weight has been deducted in this table.									


Beams - Allowable Uniform Loads

Part: 203.2 x 101.6 x 12.7mm I-Beam									
Part Number: F-P-IS(203/102/12.7)									
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)					
				L/100	L/150	L/180	L/240	L/360	
1.83	17993	25456	F _v	----	----	----	20182	13427	
2.13	10346	21808	F _v	----	----	18497	13852	9207	
2.44	6455	19071	F _v	----	15802	13154	9845	6536	
2.74	4280	16943	F _v	----	11581	9637	7207	4777	
3.05	2972	15240	F _v	13101	8706	7241	5410	3579	
3.35	2140	13847	F _v	10075	6689	5560	4149	2738	
3.66	1586	11847	F _b	7896	5236	4350	3241	2133	
3.96	1203	10083	F _b	6291	4166	3458	2573	1687	
4.27	929	8682	F _b	5084	3362	2788	2070	1352	
4.57	728	7552	F _b	4161	2746	2275	1685	1096	
4.88	577	6628	F _b	3444	2268	1876	1386	896	
5.18	462	5862	F _b	2878	1891	1562	1151	739	
5.49	372	5219	F _b	2426	1590	1311	962	614	
5.79	301	4676	F _b	2061	1346	1108	810	512	
6.10	244	4212	F _b	1763	1148	943	686	430	
Part weight has been deducted in this table.									


Beams - Allowable Uniform Loads

Part: 254 x 127 x 9.5mm I-Beam									
Part Number: F-P-IS(254/127/9.5)									
					A _w	2237mm ²	Wt.	8.6kg/m	
					I	46463914mm ⁴	S	365923mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)					
				L/100	L/150	L/180	L/240	L/360	
2.13	15066	21613	F _v	----	----	----	19046	12669	
2.44	9026	18900	F _v	----	----	18543	13886	9229	
2.74	5761	16791	F _v	----	16652	13860	10374	6888	
3.05	3863	15104	F _v	----	12717	10583	7916	5249	
3.35	2694	13723	F _v	----	9898	8235	6155	4075	
3.66	1939	12572	F _v	11793	7834	6514	4864	3215	
3.96	1432	11599	F _v	9478	6291	5228	3900	2572	
4.27	1080	10764	F _v	7719	5118	4251	3167	2083	
4.57	828	9570	F _b	6359	4211	3496	2601	1706	
4.88	644	8401	F _b	5294	3501	2904	2157	1410	
5.18	506	7432	F _b	4449	2938	2434	1804	1175	
5.49	401	6620	F _b	3770	2485	2057	1521	986	
5.79	319	5933	F _b	3218	2117	1750	1292	833	
6.10	255	5346	F _b	2766	1816	1499	1103	708	
6.40	203	4842	F _b	2393	1567	1292	948	604	
6.71	162	4404	F _b	2081	1359	1119	818	517	
7.01	128	4022	F _b	1819	1185	973	709	444	
7.32	100	3687	F _b	1598	1037	850	616	383	
7.62	77	3391	F _b	1409	911	745	538	330	
Part weight has been deducted in this table.									

Beams - Allowable Uniform Loads


Part: 254 x 127 x 12.7mm I-Beam									
Part Number: F-P-IS(254/127/12.7)									
					A _w	2903mm ²	Wt.	10.71kg/m	
					I	59641801mm ⁴	S	469653mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)					
	Max. Load (N/m)			L/100	L/150	L/180	L/240	L/360	
2.13	21472	28040	F _v	----	----	----	24542	16326	
2.44	13050	24522	F _v	----	----	23879	17883	11887	
2.74	8452	21786	F _v	----	21429	17840	13354	8868	
3.05	5752	19597	F _v	----	16363	13618	10188	6757	
3.35	4070	17806	F _v	----	12733	10594	7919	5244	
3.66	2973	16313	F _v	15165	10075	8378	6258	4137	
3.96	2228	15050	F _v	12187	8090	6724	5017	3309	
4.27	1705	13968	F _v	9924	6581	5466	4074	2681	
4.57	1327	12287	F _b	8175	5415	4495	3345	2195	
4.88	1048	10786	F _b	6806	4502	3734	2774	1815	
5.18	837	9542	F _b	5719	3777	3130	2322	1513	
5.49	675	8500	F _b	4846	3196	2645	1958	1270	
5.79	548	7618	F _b	4137	2723	2252	1663	1073	
6.10	448	6865	F _b	3557	2336	1929	1421	912	
6.40	367	6217	F _b	3076	2016	1662	1221	779	
6.71	301	5656	F _b	2676	1749	1440	1054	667	
7.01	247	5165	F _b	2339	1525	1253	913	574	
7.32	202	4735	F _b	2055	1335	1095	795	495	
7.62	165	4356	F _b	1812	1173	960	694	428	
Part weight has been deducted in this table.									

Beams - Allowable Uniform Loads

Part: 304.8 x 152.4 x 12.7mm I-Beam									
Part Number: F-P-IS(305/152/12.7)									
			A_w I	3548mm ²			Wt.		
				105706133mm ⁴			S		
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)					
	Max. Load (N/m)			L/100	L/150	L/180	L/240	L/360	
2.13	34273	34273	F_v	---	---	---	---	25029	
2.44	24706	29973	F_v	---	---	---	28049	18657	
2.74	15757	26629	F_v	---	---	---	21350	14191	
3.05	10567	23953	F_v	---	---	22105	16547	10989	
3.35	7377	21764	F_v	---	20929	17420	13033	8646	
3.66	5322	19940	F_v	---	16739	13928	10414	6901	
3.96	3945	18396	F_v	---	13564	11282	8430	5578	
4.27	2990	17073	F_v	16746	11121	9247	6903	4560	
4.57	2310	15926	F_v	13886	9215	7658	5712	3766	
4.88	1812	14923	F_v	11627	7709	6403	4770	3138	
5.18	1441	14038	F_v	9820	6504	5399	4018	2636	
5.49	1159	12583	F_b	8360	5531	4588	3409	2230	
5.79	940	11280	F_b	7168	4736	3926	2913	1899	
6.10	768	10168	F_b	6187	4082	3381	2504	1627	
6.40	631	9211	F_b	5372	3539	2928	2164	1400	
6.71	521	8381	F_b	4690	3084	2549	1880	1211	
7.01	431	7658	F_b	4115	2701	2230	1640	1051	
7.32	357	7022	F_b	3627	2376	1959	1437	916	
7.62	296	6462	F_b	3211	2098	1727	1264	800	
7.92	245	5965	F_b	2853	1860	1529	1115	701	
8.23	201	5522	F_b	2545	1654	1357	986	615	
8.53	165	5126	F_b	2277	1476	1208	875	541	
8.84	133	4770	F_b	2044	1320	1079	777	476	
9.14	106	4449	F_b	1839	1184	965	692	419	

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads


Part: 457.2 x 9.5 x 114.3 x 12.7mm I-Beam								
Part Number: F-P-IS(457/9.5/114/12.7)								
				A _w	4112mm ²	Wt.	12.95kg/m	
				I	207345685mm ⁴	S	907024mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
	Max. Load (N/m)			L/100	L/150	L/180	L/240	L/360
1.83	41793	46391	F _v	---	---	---	---	44253
2.13	22848	39746	F _v	---	---	---	---	33580
2.44	13571	34762	F _v	---	---	---	---	25940
2.74	8585	30885	F _v	---	---	---	30585	20348
3.05	5705	27784	F _v	---	---	---	24334	16180
3.35	3942	25247	F _v	---	---	---	19601	13025
3.66	2810	23132	F _v	---	---	21333	15968	10603
3.96	2055	21343	F _v	---	21106	17567	13143	8720
4.27	1535	19809	F _v	---	17750	14604	10921	7239
4.57	1165	18480	F _v	---	14723	12248	9154	6060
4.88	896	17317	F _v	---	12451	10354	7734	5114
5.18	696	16291	F _v	15975	10608	8818	6582	4346
5.49	545	15379	F _v	13712	9099	7562	5639	3717
5.79	428	14563	F _v	11846	7855	6524	4862	3199
6.10	337	13335	F _b	10293	6820	5662	4215	2768
6.40	264	12083	F _b	8993	5953	4940	3673	2406
6.71	206	10998	F _b	7897	5222	4331	3216	2102
7.01	159	10052	F _b	6967	4602	3814	2829	1843
7.32	121	9221	F _b	6173	4073	3373	2498	1623
7.62	89	8488	F _b	5491	3619	2994	2214	1434
7.92	62	7838	F _b	4904	3227	2668	1969	1270
8.23	39	7259	F _b	4394	2887	2385	1757	1129
8.53	20	6741	F _b	3950	2591	2138	1572	1006
8.84	----	6276	F _b	3562	2332	1922	1410	898
9.14	----	5856	F _b	3221	2105	1733	1268	803

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

Part: 609.6 x 9.5 x 190.5 x 19.1mm I-Beam

Part Number: F-P-IS(610/9.5/191/19)



A_w

5445mm²

Wt.

22.62kg/m

I

781266386mm⁴

S


2563265mm³

Span (m)	No Lateral Support	Maximum Load (N/m)	Deflection (N/m)					
			L/100	L/150	L/180	L/240	L/360	
3.05	36730	36730	F _v	----	----	----	----	35335
3.35	33371	33371	F _v	----	----	----	----	29887
3.66	24071	30571	F _v	----	----	----	----	25450
3.96	17569	28203	F _v	----	----	----	----	21804
4.27	13127	26172	F _v	----	----	----	----	18782
4.57	10006	24413	F _v	----	----	----	----	16262
4.88	7760	22873	F _v	----	----	----	21330	14146
5.18	6108	21514	F _v	----	----	----	18651	12360
5.49	4870	20307	F _v	----	----	----	16378	10844
5.79	3926	19226	F _v	----	----	----	14439	9552
6.10	3196	18254	F _v	----	----	17111	12778	8445
6.40	2624	17374	F _v	----	----	15205	11348	7492
6.71	2170	16574	F _v	----	16314	13558	10113	6668
7.01	1806	15844	F _v	----	14598	12128	9041	5953
7.32	1511	15174	F _v	----	13104	10883	8107	5331

Part weight has been deducted in this table.

Part: 609.6 x 9.5 x 190.5 x 19.1mm I-Beam

Part Number: F-P-IS(610/9.5/191/19)



A_w

5445mm²

Wt.

22.62kg/m

I

781266386mm⁴

S

2563265mm³


Span (m)	No Lateral Support	Maximum Load (N/m)	Deflection (N/m)					
			L/100	L/150	L/180	L/240	L/360	
7.62	1269	14559	F _v	----	11798	9794	7290	4786
7.92	1069	13990	F _v	----	10651	8839	6574	4309
8.23	903	13464	F _v	----	9641	7997	5943	3888
8.53	764	12975	F _v	----	8749	7254	5385	3516
8.84	647	12520	F _v	12049	7959	6596	4891	3187
9.14	547	12095	F _v	10996	7256	6010	4452	2894
9.45	462	11698	F _v	10056	6630	5488	4061	2633
9.75	389	11326	F _v	9216	6070	5022	3711	2400
10.06	325	10976	F _v	8463	5568	4603	3397	2191
10.36	271	10646	F _v	7787	5117	4227	3115	2003
10.67	223	10336	F _v	7177	4711	3889	2861	1834
10.97	181	10043	F _v	6627	4344	3583	2632	1681
11.28	144	9765	F _v	6129	4012	3306	2424	1542
11.58	112	9502	F _v	5677	3711	3055	2236	1417
11.89	83	9253	F _v	5267	3437	2827	2065	1303
12.19	58	9016	F _v	4893	3188	2620	1909	1199

Part weight has been deducted in this table.




WF-Beam

Beams - Allowable Uniform Loads

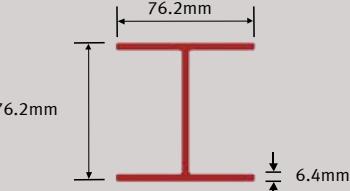
Part: 76.2 x 76.2 x 6.4mm WF-Beam								
Part Number: F-P-WF(76/76/6.4)								
				A_w	403.2mm ²	Wt.	2.44kg/m	
				I	1319454mm ⁴	S	34577mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	
1.22	6817	6817	F _v	----	5674	4724	3537	2350
1.52	3278	5449	F _v	4707	3130	2604	1947	1290
1.83	1741	4537	F _v	2840	1885	1567	1169	772
2.13	1028	3885	F _v	1831	1213	1007	749	491
2.44	654	3183	F _b	1242	820	679	504	328
2.74	439	2510	F _b	877	577	477	351	226
3.05	306	2029	F _b	639	418	344	252	160

Part weight has been deducted in this table.

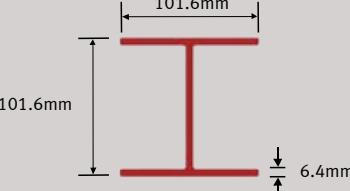
Part: 101.6 x 101.6 x 6.4mm WF-Beam								
Part Number: F-P-WF(102/102/6.4)								
				A_w	564.5mm ²	Wt.	3.20kg/m	
				I	3304878mm ⁴	S	65057mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	
1.22	9546	9546	F _v	----	----	----	7630	5076
1.52	7630	7630	F _v	----	7062	5879	4402	2924
1.83	4219	6353	F _v	----	4386	3650	2729	1809
2.13	2396	5441	F _v	4342	2884	2398	1791	1183
2.44	1477	4757	F _v	2993	1985	1649	1229	809
2.74	967	4156	F _b	2140	1417	1175	874	572
3.05	663	3360	F _b	1578	1041	863	639	416
3.35	471	2772	F _b	1193	785	649	479	309
3.66	344	2324	F _b	920	603	497	365	233
3.96	256	1976	F _b	723	471	388	283	178
4.27	194	1699	F _b	576	373	306	222	137
4.57	149	1476	F _b	465	299	244	175	106

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

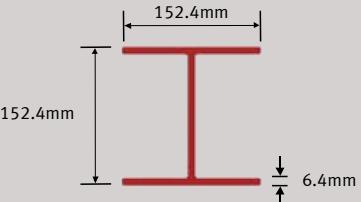Part: 152.4 x 152.4 x 6.4mm WF-Beam								
Part Number: F-P-WF(152/152/6.4)								
		A _w	887.1mm ²		Wt.	5.06kg/m		
Span (m)	No Lateral Support	Maximum Load (N/m)						
			L/100	L/150	L/180	L/240	L/360	
1.52	11990	11990	F _v	----	----	----	8091	
1.83	9896	9896	F _b	----	----	8016	5328	
2.13	7258	7258	F _b	----	----	5504	3652	
2.44	5545	5545	F _b	----	5230	3910	2590	
2.74	3790	4371	F _b	----	3830	2860	1890	
3.05	2522	3531	F _b	3460	2875	2144	1413	
3.35	1746	2909	F _b	2656	2205	1641	1078	
3.66	1248	2437	F _b	2076	1722	1279	836	
3.96	915	2069	F _b	1649	1366	1012	658	
4.27	685	1777	F _b	1328	1098	811	524	
4.57	522	1542	F _b	1082	893	658	422	

Part weight has been deducted in this table.

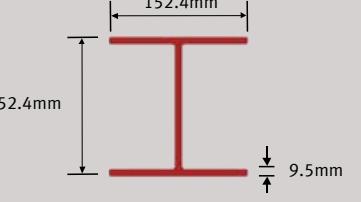
Part: 152.4 x 152.4 x 9.5mm WF-Beam								
Part Number: F-P-WF(152/152/9.5)								
		A _w	1270mm ²		Wt.	7.29kg/m		
Span (m)	No Lateral Support	Maximum Load (N/m)						
			L/100	L/150	L/180	L/240	L/360	
1.22	21480	21480	F _v	----	----	----	18393	
1.52	17170	17170	F _v	----	----	----	11529	
1.83	14296	14296	F _v	----	----	11415	7586	
2.13	12244	12244	F _v	----	10468	7833	5198	
2.44	9783	10704	F _v	8943	7441	5563	3685	
2.74	6306	9507	F _v	6551	5447	4067	2688	
3.05	4272	8549	F _v	7416	4920	3048	2008	
3.35	3011	7765	F _v	5699	3775	2333	1531	
3.66	2191	7112	F _v	4462	2951	1817	1188	
3.96	1636	6560	F _v	3550	2343	1438	935	
4.27	1249	5765	F _b	2865	1886	1152	744	
4.57	970	5013	F _b	2341	1537	934	599	

Part weight has been deducted in this table.


Beams - Allowable Uniform Loads

Part: 203.2 x 203.2 x 9.5mm WF-Beam								
Part Number: F-P-WF(203/203/9.5)								
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.22	29666	29666	F _v	---	---	---	---	---
1.52	23714	23714	F _v	---	---	---	---	21636
1.83	19746	19746	F _v	---	---	---	---	15008
2.13	16911	16911	F _v	---	---	---	16139	10727
2.44	14786	14786	F _v	---	---	---	11849	7868
2.74	13132	13132	F _v	---	---	11898	8900	5902
3.05	11716	11810	F _v	---	10968	9125	6820	4515
3.35	8108	9755	F _b	---	8566	7123	5318	3514
3.66	5800	8182	F _b	---	6797	5648	4212	2777
3.96	4265	6958	F _b	---	5469	4541	3382	2223
4.27	3210	5986	F _b	---	4455	3696	2749	1801
4.57	2463	5202	F _b	---	3669	3042	2258	1474
4.88	1922	4561	F _b	---	3052	2527	1872	1216
5.18	1521	4029	F _b	3888	2561	2118	1565	1012
5.49	1219	3584	F _b	3295	2165	1789	1318	847
5.79	986	3207	F _b	2813	1844	1521	1117	713
6.10	805	2885	F _b	2417	1580	1301	952	603
Part weight has been deducted in this table.								

Beams - Allowable Uniform Loads

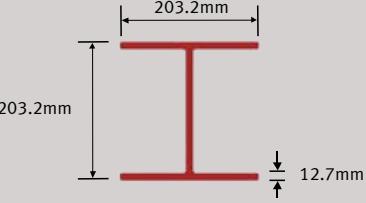
Part: 203.2 x 203.2 x 12.7mm WF-Beam								
Part Number: F-P-WF(203/203/12.7)								
				A _w	2258mm ²		Wt.	12.95kg/m
				I	52844742mm ⁴		S	520125mm ³
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
				L/100	L/150	L/180	L/240	L/360
1.83	25412	25412	F _v	---	---	---	---	19254
2.13	21764	21764	F _v	---	---	---	20696	13755
2.44	19028	19028	F _v	---	---	---	15189	10083
2.74	16899	16899	F _v	---	---	15247	11404	7560
3.05	15197	15197	F _v	---	14052	11689	8735	5781
3.35	11596	13804	F _v	---	10972	9122	6810	4497
3.66	8378	12643	F _v	---	8703	7231	5391	3552
3.96	6222	11660	F _v	10563	7000	5812	4327	2843
4.27	4730	10818	F _v	8614	5701	4729	3515	2301
4.57	3667	10089	F _v	7104	4694	3890	2886	1882
4.88	2890	9450	F _v	5918	3903	3231	2392	1552
5.18	2311	8887	F _v	4974	3273	2707	1998	1290
5.49	1870	8242	F _b	4214	2767	2285	1682	1079
5.79	1529	7385	F _b	3597	2355	1942	1425	907
6.10	1262	6652	F _b	3090	2017	1660	1213	767
6.40	1049	6022	F _b	2670	1738	1427	1038	650
6.71	878	5476	F _b	2319	1504	1232	892	553
7.01	738	4999	F _b	2025	1308	1068	770	471
7.32	623	4581	F _b	1775	1141	930	666	401
7.62	528	4212	F _b	1563	999	812	577	342
Part weight has been deducted in this table.								

Beams - Allowable Uniform Loads

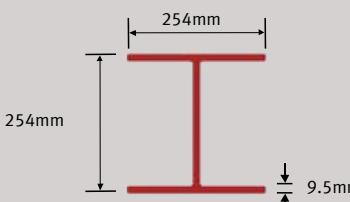
Part: 254 x 254 x 9.5mm WF-Beam								
Part Number: F-P-WF(254/254/9.5)								
				A _w	2237mm ²	Wt.	13.01kg/m	
				I	82634425mm ⁴	S	650730mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
	Max. Load (N/m)			L/100	L/150	L/180	L/240	
2.13	21569	21569	F _v	---	---	---	---	17668
2.44	18857	18857	F _v	---	---	---	---	13349
2.74	14953	14953	F _b	---	---	---	---	10266
3.05	12088	12088	F _b	---	---	---	---	8022
3.35	9968	9968	F _b	---	---	---	9600	6357
3.66	8355	8355	F _b	---	---	---	7718	5103
3.96	7100	7100	F _b	---	---	---	6278	4143
4.27	6105	6105	F _b	---	---	---	5161	3398
4.57	5301	5301	F _b	---	---	---	4283	2813
4.88	4288	4644	F _b	---	---	---	3585	2348
5.18	3375	4099	F _b	---	---	4075	3024	1974
5.49	2690	3643	F _b	---	---	3467	2569	1670
5.79	2169	3256	F _b	---	---	2970	2195	1421
6.10	1765	2926	F _b	---	---	2558	1887	1215
6.40	1448	2642	F _b	---	---	2216	1630	1044
6.71	1197	2396	F _b	---	2339	1928	1414	900
7.01	996	2182	F _b	---	2048	1685	1232	779
7.32	832	1993	F _b	---	1800	1479	1077	676
7.62	698	1827	F _b	---	1588	1302	945	587

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

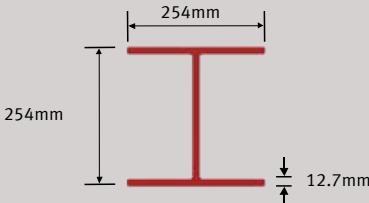Part: 254 x 254 x 12.7mm WF-Beam								
Part Number: F-P-WF(254/254/12.7)								
				A _w	2903mm ²	Wt.	16.22kg/m	
				I	106638491mm ⁴	S	839673mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)	Deflection (N/m)					
	Max. Load (N/m)		L/100	L/150	L/180	L/240	L/360	
2.13	27986	27986	F _v	----	----	----	----	22865
2.44	24468	24468	F _v	----	----	----	----	17270
2.74	21732	21732	F _v	----	----	----	19999	13280
3.05	19543	19543	F _v	----	----	----	15642	10375
3.35	17752	17752	F _v	----	----	16603	12413	8222
3.66	16259	16259	F _v	----	16062	13358	9979	6600
3.96	13552	14996	F _v	----	13083	10876	8117	5358
4.27	10190	13914	F _v	----	10772	8950	6673	4396
4.57	7819	12294	F _b	----	8956	7437	5538	3639
4.88	6105	10786	F _b	----	7513	6234	4636	3038
5.18	4839	9536	F _b	----	6353	5268	3911	2554
5.49	3886	8489	F _b	8197	5411	4483	3323	2162
5.79	3157	7603	F _b	7039	4640	3840	2840	1841
6.10	2591	6846	F _b	6083	4002	3309	2442	1575
6.40	2145	6195	F _b	5287	3471	2866	2110	1354
6.71	1789	5630	F _b	4618	3026	2495	1832	1168
7.01	1502	5138	F _b	4054	2650	2181	1596	1011
7.32	1268	4705	F _b	3574	2330	1915	1396	878
7.62	1076	4324	F _b	3163	2056	1687	1225	764
7.92	917	3986	F _b	2810	1820	1491	1078	666
8.23	783	3684	F _b	2505	1617	1321	951	581
8.53	671	3415	F _b	2240	1440	1174	841	507
8.84	576	3173	F _b	2009	1286	1045	744	443
9.14	495	2954	F _b	1806	1151	933	660	387
Part weight has been deducted in this table.								

Beams - Allowable Uniform Loads

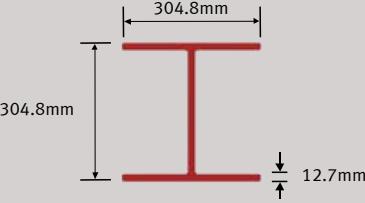
Part: 304.8 x 304.8 x 12.7mm WF-Beam								
Part Number: F-P-WF(305/305/12.7)								
				A _w	3548mm ²	Wt.	19.64kg/m	
				I	188323909mm ⁴	S	1236404mm ³	
Span (m)	No Lateral Support	Maximum Load (N/m)		Deflection (N/m)				
	Max. Load (N/m)			L/100	L/150	L/180	L/240	L/360
2.13	34207	34207	F _v	---	---	---	---	33180
2.44	29907	29907	F _v	---	---	---	---	25696
2.74	26563	26563	F _v	---	---	---	---	20199
3.05	23887	23887	F _v	---	---	---	---	16087
3.35	21698	21698	F _v	---	---	---	19544	12965
3.66	19702	19702	F _b	---	---	---	15938	10561
3.96	16759	16759	F _b	---	---	---	13128	8688
4.27	14424	14424	F _b	---	---	---	10913	7211
4.57	12540	12540	F _b	---	---	12261	9148	6034
4.88	10998	10998	F _b	---	---	10367	7727	5087
5.18	9363	9720	F _b	---	---	8827	6572	4317
5.49	7485	8649	F _b	---	---	7566	5626	3687
5.79	6055	7743	F _b	---	---	6524	4845	3166
6.10	4950	6969	F _b	---	6827	5657	4194	2732
6.40	4084	6304	F _b	---	5654	4930	3649	2369
6.71	3398	5726	F _b	---	5218	4316	3189	2062
7.01	2847	5223	F _b	---	4593	3795	2798	1801
7.32	2401	4781	F _b	---	4059	3350	2465	1579
7.62	2036	4391	F _b	---	3600	2968	2178	1388
7.92	1736	4045	F _b	---	3205	2638	1931	1223
8.23	1486	3737	F _b	---	2861	2352	1716	1080
8.53	1277	3461	F _b	---	2562	2103	1529	955
8.84	1100	3214	F _b	---	2300	1885	1366	846
9.14	951	2990	F _b	---	2070	1693	1222	750
9.45	823	2788	F _b	---	1868	1524	1095	666
9.75	713	2605	F _b	---	1688	1375	983	591
10.06	619	2438	F _b	2389	1529	1242	883	525
10.36	537	2286	F _b	2176	1387	1123	794	465
10.67	465	2146	F _b	1986	1260	1018	715	412

Part weight has been deducted in this table.

Rectangular Hollow Section




Beams - Allowable Uniform Loads

Part: 101.6 x 3.2 x 50.8 x 6.4mm Rectangular Hollow Section							
Part Number: F-P-RHS(102/3.2/51/6.4)							
	A_w	283mm ²	Wt.	2.17kg/m		I	1823093mm ⁴
	S	35887mm ³					
Span (m)	Maximum Load (N/m)	Deflection (N/m)	L/100	L/150	L/180	L/240	L/360
1.52	3824	F_v	----	3794	3167	2364	1562
1.83	3181	F_b	----	2364	1970	1474	963
2.13	2729	F_b	2350	1562	1299	963	628
2.44	2379	F_b	1620	1065	890	657	423
2.74	2116	F_b	1153	759	628	467	306
3.05	1897	F_b	846	555	467	336	219
3.35	1722	F_b	642	423	350	248	161
3.66	1445	F_b	496	321	263	190	117
Part weight has been deducted in this table.							

Beams - Allowable Uniform Loads

Part: 152.4 x 101.6 x 6.4mm Rectangular Hollow Section

Part Number: F-P-RHS(152/102/6.4)



A_w	1561mm ²	Wt.	5.66kg/m
I	9527537mm ⁴	S	125033mm ³

Major Axis (N/m)

Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
1.83	14652	F_v	----	12580	10478	7837	5210
2.13	15076	F_b	12478	8304	6903	5166	3430
2.44	11544	F_b	8625	5721	4758	3561	2350
2.74	9107	F_b	6173	4101	3400	2539	1678
3.05	7370	F_b	4568	3021	2510	1868	1226
3.35	6071	F_b	3459	2291	1897	1401	919
3.66	5093	F_b	2685	1766	1459	1080	701
3.96	4334	F_b	2116	1386	1153	846	540
4.27	3721	F_b	1693	1109	919	671	423
4.57	3240	F_b	1372	890	730	540	336
4.88	2846	F_b	1124	730	598	438	263

Minor Axis (N/m)

A_w	993mm ²	Wt.	5.66 kg/m
I	5032237mm ⁴	S	99141mm ³

Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
1.83	9311	F_v	----	6830	5677	4247	2817
2.13	7968	F_v	6728	4466	3707	2773	1824
2.44	6961	F_v	4612	3050	2539	1883	1240
2.74	6188	F_v	3284	2175	1795	1343	876
3.05	5560	F_v	2423	1591	1313	978	628
3.35	4801	F_b	1824	1197	992	730	467
3.66	4028	F_b	1401	919	759	555	350
3.96	3430	F_b	1095	715	584	423	263
4.27	2948	F_b	876	555	452	336	204
4.57	2554	F_b	701	452	365	263	146
4.88	2247	F_b	569	365	292	204	117

Part weight has been deducted in this table.


A dark gray background featuring a stack of several square hollow metal sections. The sections are oriented vertically and overlap each other, creating a sense of depth. The central section is fully visible, showing its hollow interior and thick walls.

Square Hollow Section

Beams - Allowable Uniform Loads

Part: 76.2 x 6.4mm Square Hollow Section

Part Number: F-P-SHS(76/76/6.4)




			A_w	806mm ²	Wt.	3.08kg/m	
			I	1456810mm ⁴	S	38182mm ³	
Span (m)	Maximum Load (N/m)		Deflection (N/m)				
	L/100	L/150	L/180	L/240	L/360		
1.22	13645	F_v	10362	6888	5735	4291	2846
1.52	9019	F_b	5546	3678	3065	2277	1503
1.83	6246	F_b	3269	2175	1795	1343	876
2.13	4583	F_b	2072	1372	1138	846	540
2.44	3503	F_b	1401	919	759	555	350
2.74	2758	F_b	978	628	525	379	234
3.05	2218	F_b	701	452	365	263	161
3.35	1824	F_b	525	336	263	190	117
3.66	1532	F_b	394	248	204	131	73

Part weight has been deducted in this table.

Part: 88.9 x 6.4mm Square Hollow Section

Part Number: F-P-SHS(89/89/6.4)




			A_w	967mm ²	Wt.	3.71kg/m	
			I	2385006mm ⁴	S	53585mm ³	
Span (m)	Maximum Load (N/m)		Deflection (N/m)				
	L/100	L/150	L/180	L/240	L/360		
1.22	16374	F_v	16243	10814	9004	6742	4480
1.52	12682	F_b	8829	5867	4889	3649	2423
1.83	8786	F_b	5268	3503	2904	2175	1430
2.13	6451	F_b	3741	2233	1853	1386	905
2.44	4933	F_b	2277	1503	1240	919	598
2.74	3882	F_b	1605	1051	876	642	409
3.05	3138	F_b	1168	759	628	467	292
3.35	2583	F_b	876	569	467	336	204
3.66	2160	F_b	657	423	350	248	146
3.96	1839	F_b	511	321	263	190	117
4.27	1576	F_b	409	248	204	146	88

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

Part: 101.6 x 6.4mm Square Hollow Section

Part Number: F-P-SHS(102/102/6.4)

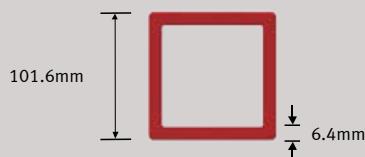

A_w

1129.032mm²

Wt.

50.5388kg/m

I

3671157.42mm⁴

S

72266.58mm³


Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
0.91	44296	F_b	---	30110	25092	18819	12546
1.22	24917	F_b	---	14750	12291	9219	6146
1.52	15947	F_b	12241	8161	6800	5100	3400
1.83	11074	F_b	7408	4939	4116	3087	2058
2.13	8136	F_b	4798	3198	2665	1999	1333
2.44	6229	F_b	3274	2183	1819	1364	910
2.74	4922	F_b	2330	1553	1294	971	647
3.05	3987	F_b	1714	1143	952	714	476
3.35	3295	F_b	1297	865	721	540	360
3.66	2769	F_b	1004	670	558	419	220
3.96	2359	F_b	793	529	441	331	8075
4.27	2034	F_b	637	425	354	266	177
4.57	1772	F_b	520	346	289	216	144
4.88	1557	F_b	429	286	238	179	119
5.18	1379	F_b	358	239	199	149	100
5.49	1230	F_b	302	202	168	126	84
5.79	1104	F_b	257	172	143	107	72
6.10	997	F_b	221	147	123	92	61
6.40	904	F_b	191	127	106	80	53
6.71	824	F_b	166	111	92	69	46
7.01	754	F_b	146	97	81	61	40
7.32	288	F_b	128	86	71	53	36
7.62	638	F_b	114	76	63	47	32
7.92	590	F_b	101	67	56	42	28

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

Part: 101.6 x 8mm Square Hollow Section

Part Number: F-P-SHS(102/102/8)

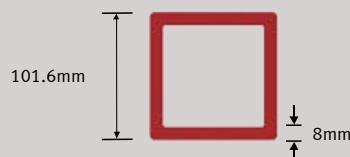 A_w 2995.2mm²

Wt.

5.32kg/m

I

4E+06mm⁴


S

86720.8668mm³

Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
1.22	51756	F_b	250774	167183	139319	104489	69660
1.52	41541	F_b	161553	107702	89752	67314	44876
1.83	34504	F_b	111455	74304	61920	46440	30960
2.13	29644	F_b	82270	54847	45706	34279	22853
2.44	25878	F_b	62694	41796	34830	26122	17415
2.74	23045	F_b	49717	33144	27620	20715	13810
3.05	20702	F_b	40124	26749	22291	16718	11146
3.35	18849	F_b	33259	22173	18477	13858	9239
3.66	17252	F_b	27864	18576	15480	11610	7740

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

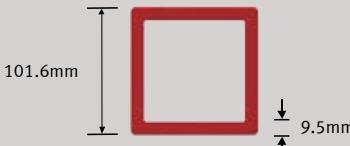
Part: 101.6 x 9.5mm Square Hollow Section							
Part Number: F-P-SHS(102/102/9.5)							
 101.6mm		A_w 1574mm ²		Wt. 6.31kg/m			
I 5007264mm ⁴		S 98486mm ³					
Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
1.52	21293	F_v	17951	11938	9939	7443	4933
1.83	16170	F_b	10829	7195	5984	4466	2948
2.13	11865	F_b	6976	4626	3853	2860	1883
2.44	9063	F_b	4743	3138	2598	1926	1270
2.74	7151	F_b	3357	2204	1824	1357	876
3.05	5779	F_b	2452	1605	1328	978	628
3.35	4758	F_b	1839	1197	992	715	452
3.66	3984	F_b	1401	905	744	540	336
3.96	3386	F_b	1095	701	569	409	248
4.27	2904	F_b	861	555	452	321	190
4.57	2525	F_b	686	438	350	248	146
4.88	2204	F_b	555	350	277	190	102
5.18	1956	F_b	452	277	219	146	73
5.49	1737	F_b	365	219	175	117	44
5.79	1547	F_b	306	175	131	88	29
6.10	1386	F_b	248	146	102	58	15
Part weight has been deducted in this table.							

Part weight has been deducted in this table.

Beams - Allowable Uniform Loads

Part: 127 x 8mm Square Hollow Section

Part Number: F-P-SHS(127/127/8)

 A_w 3808mm²

Wt.

6.48kg/m

I

9E+06mm⁴


S

142175.328mm³

Span (m)	Maximum Load (N/m)	Deflection (N/m)					
		L/100	L/150	L/180	L/240	L/360	
1.22	81250	F_b	513918	342612	285510	214132	142755
1.52	65214	F_b	331075	220717	183931	137948	91965
1.83	54167	F_b	228408	152272	126893	95170	63447
2.13	46538	F_b	168599	112399	93666	70249	46833
2.44	40625	F_b	128479	85653	71377	53533	35689
2.74	36177	F_b	101885	67924	56603	42452	28302
3.05	32500	F_b	82227	54818	45682	34261	22841
3.35	29590	F_b	68159	45439	37866	28400	18933
3.66	27083	F_b	57102	38068	31723	23792	15862

Part weight has been deducted in this table.


Beams - Allowable Uniform Loads

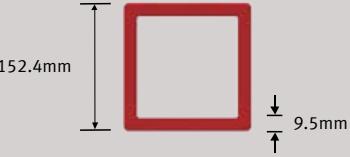Part: 152.4 x 9.5mm Square Hollow Section							
Part Number: F-P-SHS(152/152/9.5)							
		A_w	2535mm ²		Wt.	9.73kg/m	
		I	9302772mm ⁴		S	122083mm ³	
Span (m)	Maximum Load (N/m)		Deflection (N/m)				
		L/100	L/150	L/180	L/240	L/360	
1.52	27428	F_v	---	---	---	23009	15305
1.83	22839	F_v	---	---	19325	14469	9612
2.13	19562	F_v	---	15416	12829	9597	6364
2.44	17104	F_v	16090	10693	8894	6645	4396
2.74	15192	F_v	11578	7685	6387	4765	3142
3.05	13663	F_v	8581	5686	4722	3516	2310
3.35	11563	F_b	6518	4311	3576	2656	1737
3.66	9700	F_b	5055	3336	2763	2047	1330
3.96	8250	F_b	3991	2626	2172	1603	1035
4.27	7099	F_b	3198	2098	1731	1273	815
4.57	6171	F_b	2597	1697	1397	1022	648
4.88	5411	F_b	2132	1387	1139	829	518
5.18	4782	F_b	1768	1145	937	677	417
5.49	4254	F_b	1479	952	776	556	337
5.79	3808	F_b	1246	796	647	459	272
6.10	3426	F_b	1056	670	541	381	220
Part weight has been deducted in this table.							


A dark, monochromatic photograph showing a stack of grey interlocking deckboards. The boards are arranged vertically, with their interlocking edges visible. The lighting is dramatic, coming from the side, which creates strong highlights and deep shadows, emphasizing the texture and depth of the stack.

Interlocking Deckboard


304.8mm Interlocking Deckboard

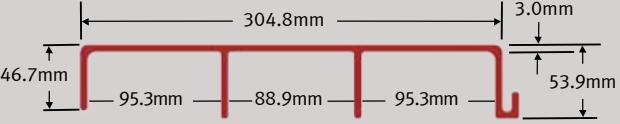Part: 304.8mm Interlocking Deckboard									
Part Number: F-P-ID(305)									
					A_w				
						Wt.			
									4.48 kg/m
					I	765865mm ⁴			
					S	20811mm ³			
Span (m)	Load (N/m)	Deflection (N/m)							
		250	500	750	1000	1500	2000	4000	6000
0.5	U	0.1	0.1	0.2	0.2	0.3	0.5	0.9	1.4
---	C	0.1	0.1	0.2	0.3	0.4	0.6	1.2	1.8
0.75	U	0.1	0.3	0.4	0.5	0.8	1.1	2.2	3.2
---	C	0.2	0.4	0.6	0.7	1.1	1.5	3.0	4.5
1	U	0.3	0.5	0.8	1.1	1.6	2.2	4.3	6.5
---	C	0.4	0.8	1.2	1.6	2.4	3.1	6.3	---
1.25	U	0.5	1.0	1.4	1.9	2.9	3.9	7.7	11.6
---	C	0.7	1.4	2.2	2.9	4.3	5.8	11.6	---
1.5	U	0.8	1.6	2.4	3.2	4.7	6.3	12.6	19.0
---	C	1.2	2.4	3.6	4.8	7.2	9.6	---	---
1.75	U	1.2	2.4	3.6	4.9	7.3	9.7	19.4	---
---	C	1.9	3.7	5.6	7.5	11.2	15.0	---	---
2	U	1.8	3.5	5.3	7.1	10.6	14.2	---	---
---	C	2.8	5.5	8.3	11.0	16.6	22.1	---	---
U Millimeters deflection for Uniform Load									
C Millimeters deflection for Concentrated Load									
LOAD Total Newtons uniformly loaded load across width of one deckboard or Total Newtons Concentrated Center									

609.6 X 28.6mm Interlocking Deckboard

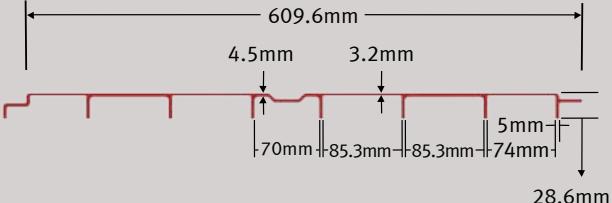Part: 609.6 x 28.6mm Interlocking Deckboard								
Part Number: F-P-ID(610/29)								
			A _w				Wt.	5.66 kg/m
I	183142mm ⁴			S	8357mm ³			
Span (m)	Load (N/m)	Deflection (N/m)						
		250	500	750	1000	1500	2000	4000
0.5	U	0.1	0.2	0.3	0.5	0.7	0.9	1.8
---	C	0.2	0.3	0.5	0.7	1	1.3	2.7
0.75	U	0.3	0.7	1	1.4	2	2.7	5.4
---	C	0.5	1	1.6	2.1	3.1	4.2	10.4
1	U	0.8	1.5	2.3	3.1	4.6	6.1	12.2
---	C	1.2	2.4	3.6	4.8	7.2	9.6	---
1.25	U	1.5	2.9	4.4	5.8	8.8	11.7	---
---	C	2.3	4.6	6.9	9.2	13.8	---	---
1.5	U	2.5	5	7.5	10	14.9	19.9	---
---	C	3.9	7.9	11.8	15.8	---	---	---
1.75	U	3.9	7.8	11.8	15.7	23.5	---	---
---	C	6.2	12.5	18.7	---	---	---	---
2	U	5.8	11.7	17.5	23.3	---	---	---
---	C	9.3	18.5	27.8	---	---	---	---
U Millimeters deflection for Uniform Load								
C Millimeters deflection for Concentrated Load								
LOAD Total Newtons uniformly loaded across length of span and width of one deckboard or Total Newtons Concentrated Center load across width of one deckboard.								

609.6 X 38.1mm Interlocking Deckboard

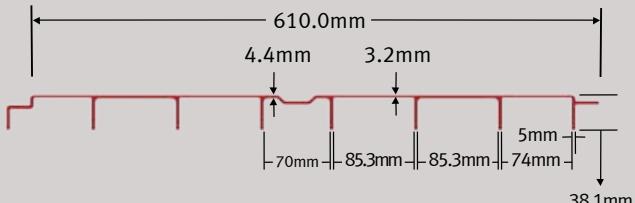Part: 609.6 x 38.1mm Interlocking Deckboard										
Part Number: F-P-ID(610/38)										
			A _w	---		Wt.	7.02 kg/m			
I	428718mm ⁴			S	14421mm ³					
Span (m)		Deflection (N/m)								
		250	500	750	1000	1500	2000	4000		
0.5	U	0.1	0.1	0.2	0.2	0.3	0.4	0.9		
---	C	0.1	0.2	0.2	0.3	0.5	0.6	1.3		
0.75	U	0.2	0.3	0.5	0.6	0.9	1.2	2.5		
---	C	0.2	0.5	0.7	0.9	1.4	1.9	3.7		
1	U	0.3	0.7	1.0	1.4	2.0	2.7	5.5		
---	C	0.5	1.1	1.6	2.1	3.2	4.2	8.4		
1.25	U	0.6	1.3	1.9	2.6	3.9	5.1	10.3		
---	C	1.0	2.0	3.0	4.0	6.0	8.0	----		
1.5	U	1.1	2.2	3.3	4.3	6.5	8.7	17.4		
---	C	1.7	3.4	5.1	6.8	10.2	13.6	----		
1.75	U	1.7	3.4	5.1	6.8	10.2	13.6	----		
---	C	2.7	5.4	8.1	10.7	16.1	21.5	----		
2	U	2.5	5.0	7.6	10.1	15.1	----	----		
---	C	4	8.0	12.0	15.9	23.9	----	----		
U Millimeters deflection for Uniform Load										
C Millimeters deflection for Concentrated Load										
LOAD Total Newtons uniformly loaded across length of span and width of one deckboard or Total Newtons Concentrated Center load across width of one deckboard.										

U Millimeters deflection for Uniform Load

C Millimeters deflection for Concentrated Load

LOAD Total Newtons uniformly loaded across length of span and width of one deckboard or Total Newtons Concentrated Center load across width of one deckboard.



Flat Sheet

6.4mm Flat Sheet

Part: 6.4mm Flat Sheet

Part Number: F-P(6.4)

SPAN Lengthwise direction of the Flat Sheet

For span in the crosswise direction of the Flat Sheet multiply load by 0.70

Maximum loads shown are for deflections of t/2 or L/100

Span (m)	Load (N/m)	Deflection (N/m)						
		200	300	400	500	750	1000	1200
0.5	U	0.55	0.83	1.1	1.38	2.07	2.76	3.31
	C	1.78	2.68	3.57	---	---	---	---
0.75	Load	100	125	200	250	---	---	---
	U	1.40	1.75	2.8	3.49	---	---	---
	C	3.01	3.76	---	---	---	---	---
1	Load	50	75	---	---	---	---	---
	U	2.21	3.31	---	---	---	---	---
	C	3.57	---	---	---	---	---	---

LOAD N/m.² for Uniform Load or N/m. of Width for Concentrated Center Load. U mm. Deflection for Uniform Load

C mm. Deflection for Concentrated Load

9.5mm Flat Sheet

Part: 9.5mm Flat Sheet

Part Number: F-P(9.5)

SPAN Lengthwise direction of the Flat Sheet

For span in the crosswise direction of the Flat Sheet multiply load by 0.70

Maximum loads shown are for deflections of t/2 or L/100

Span (m)	Load (N/m)	Deflection (N/m)										
		500	1000	2000	4000	6000	9500	15000	20000	30000	40000	60000
0.5	U	0.03	0.05	0.10	0.2	0.31	0.49	0.77	1.02	1.53	2.05	3.07
	C	0.17	0.33	0.66	1.32	1.98	3.14	----	----	----	----	----
0.75	Load	200	500	1000	1500	1800	3000	4000	5000	6000	----	----
	U	0.16	0.41	0.82	1.23	1.47	2.45	3.27	4.09	4.91	----	----
	C	0.53	1.32	2.64	3.97	4.76	----	----	----	----	----	----
1	Load	100	200	400	550	600	800	1000	1200	----	----	----
	U	0.41	0.83	1.66	2.28	2.49	3.31	4.14	4.97	----	----	----
	C	0.89	1.78	3.57	4.91	----	----	----	----	----	----	----
0.75	Load	100	200	225	300	360	----	----	----	----	----	----
	U	1.31	2.62	2.95	3.93	4.71	----	----	----	----	----	----
	C	2.11	4.23	4.76	----	----	----	----	----	----	----	----
1	Load	50	100	120	150	----	----	----	----	----	----	----
	U	1.60	3.20	3.84	4.79	----	----	----	----	----	----	----
	C	2.07	4.13	4.96	----	----	----	----	----	----	----	----

LOAD N/m.² for Uniform Load or N/m. of Width for Concentrated Center Load. U mm. Deflection for Uniform Load

C mm. Deflection for Concentrated Load

12.7mm Flat Sheet

Part: 12.7mm Flat Sheet

Part Number: F-P(12.7)

SPAN Lengthwise direction of the Flat Sheet

For span in the crosswise direction of the Flat Sheet multiply load by 0.70

Maximum loads shown are for deflections of t/2 or L/100

Span (m)	Load (N/m)	Deflection (N/m)										
		5000	10000	20000	30000	40000	50000	60000	70000	80000	90000	100000
0.25	U	0.02	0.11	0.22	0.43	0.86	1.08	1.29	1.51	1.73	1.94	1.94
	C	0.14	0.70	1.39	2.79	----	----	----	----	----	----	----
0.5	Load	1000	2000	4000	4500	6000	7000	8000	9000	10000	12000	15000
	U	0.35	0.69	1.38	1.55	2.07	2.42	2.76	3.11	3.45	4.14	5.18
	C	1.12	2.23	4.46	5.02	----	----	----	----	----	----	----
0.75	Load	500	1000	1500	1700	2000	2500	3000	3500	3650	----	----
	U	0.87	1.75	2.62	2.97	3.49	4.37	5.24	6.12	6.38	----	----
	C	1.88	3.76	5.65	6.40	----	----	----	----	----	----	----
1	Load	200	300	500	715	800	900	1000	1100	1150	----	----
	U	1.10	1.66	2.76	3.95	4.42	4.97	5.52	6.07	6.35	----	----
	C	1.78	2.68	4.46	6.38	----	----	----	----	----	----	----
1.25	Load	50	100	200	300	370	400	475	----	----	----	----
	U	0.67	1.35	2.70	4.04	4.99	5.39	6.40	----	----	----	----
	C	0.87	1.74	3.48	5.23	6.45	----	----	----	----	----	----

LOAD N/m.² for Uniform Load or N/m. of Width for Concentrated Center Load. U mm. Deflection for Uniform Load

C mm. Deflection for Concentrated Load

15.9mm Flat Sheet

Part: 15.9mm Flat Sheet

Part Number: F-FP(15.9)

SPAN Lengthwise direction of the Flat Sheet

For span in the crosswise direction of the Flat Sheet multiply load by 0.70

Maximum loads shown are for deflections of t/2 or L/100

Span (m)	Load (N/m)	Deflection (N/m)										
		5000	10000	15000	20000	30000	35000	40000	50000	100000	200000	230000
0.25	U	0.06	0.11	0.17	0.22	0.33	0.39	0.44	0.55	1.10	2.21	2.54
	C	0.36	0.71	1.07	1.43	2.14	2.50	---	---	---	---	---
0.5	Load	1000	2000	4000	6000	8800	10000	15000	20000	25000	28000	---
	U	0.18	0.35	0.71	1.06	1.56	1.77	2.65	3.53	4.42	4.95	---
	C	0.57	1.14	2.28	3.43	5.02	---	---	---	---	---	---
0.75	Load	1000	2000	3000	3900	5000	6000	7000	8400	---	---	---
	U	0.89	1.79	2.68	3.49	4.47	5.37	6.26	7.52	---	---	---
	C	1.93	3.85	5.78	7.52	---	---	---	---	---	---	---
1	Load	500	600	800	1000	1500	1650	2000	2500	2700	---	---
	U	1.41	1.70	2.26	2.83	4.24	4.67	5.66	7.07	7.63	---	---
	C	2.28	2.74	3.65	4.57	6.85	7.54	---	---	---	---	---
1.25	Load	200	400	600	800	850	1000	1100	---	---	---	---
	U	1.38	2.76	4.14	5.52	5.87	6.9	7.59	---	---	---	---
	C	1.78	3.57	5.35	7.14	7.58	---	---	---	---	---	---
1.5	Load	200	300	400	500	530	---	---	---	---	---	---
	U	2.86	4.29	5.73	7.16	7.59	---	---	---	---	---	---
	C	3.08	4.62	6.17	7.71	---	---	---	---	---	---	---
1.75	Load	200	300	310	---	---	---	---	---	---	---	---
	U	5.30	7.96	---	---	---	---	---	---	---	---	---
	C	4.90	7.34	7.59	---	---	---	---	---	---	---	---

LOAD N/m.² for Uniform Load or N/m. of Width for Concentrated Center Load. U mm. Deflection for Uniform Load

C mm. Deflection for Concentrated Load

19.0mm Flat Sheet

Part: 19.0mm Flat Sheet

Part Number: F-FP(19)

SPAN Lengthwise direction of the Flat Sheet

For span in the crosswise direction of the Flat Sheet multiply load by 0.70

Maximum loads shown are for deflections of the lesser of $t/2$ or $L/100$

Span (m)	Load (N/m)	Deflection (N/m)									
		5000	10000	20000	30000	40000	50000	61000	100000	150000	200000
0.25	U	0.03	0.06	0.13	0.19	0.26	0.32	0.39	0.64	0.96	1.28
	C	0.21	0.41	0.83	1.24	1.65	2.07	2.52	----	----	----
0.5	Load	1000	2000	5000	8000	10000	12000	15000	20000	25000	30000
	U	0.1	0.2	0.51	0.82	1.02	1.23	1.53	2.05	2.56	3.07
	C	0.33	0.66	1.65	2.64	3.30	3.97	4.96	6.61	8.26	9.91
0.75	Load	1000	2000	3000	4000	5000	6000	6800	8000	10000	12000
	U	0.52	1.04	1.55	2.07	2.59	3.11	3.52	4.14	5.18	6.21
	C	1.12	2.23	3.35	4.46	5.58	6.69	7.58	----	----	----
1	Load	1000	2000	2500	3000	3600	4000	4500	5000	5500	5900
	U	1.64	3.27	4.09	4.91	5.89	6.55	7.36	8.18	9	9.65
	C	2.64	5.29	6.61	7.93	9.52	----	----	----	----	----
1.25	Load	1000	1200	1500	1850	2000	2200	2300	2400	----	----
	U	3.99	4.79	5.99	7.39	7.99	8.79	9.19	9.59	----	----
	C	5.16	6.20	7.74	9.55	----	----	----	----	----	----
1.5	Load	400	600	700	800	900	1000	1150	----	----	----
	U	3.31	4.97	5.80	6.63	7.46	8.28	9.53	----	----	----
	C	3.57	5.35	6.24	7.14	8.03	8.92	10.26	----	----	----

LOAD N/m.² for Uniform Load or N/m. of Width for Concentrated Center Load. U mm. Deflection for Uniform Load

C mm. Deflection for Concentrated Load

25.4mm Flat Sheet

Part: 25.4mm Flat Sheet

Part Number: F-FP(25.4)

SPAN Lengthwise direction of the Flat Sheet

For span in the crosswise direction of the Flat Sheet multiply load by 0.70

Maximum loads shown are for deflections of the lesser of $t/2$ or $L/100$

Span (m)	Load (N/m)	Deflection (N/m)										
		100	200	500	800	1000	2000	3000	4000	5000	6640	8000
0.5	U	0.22	0.43	0.65	0.86	1.08	1.29	1.55	2.16	3.24	4.31	5.00
	C	0.70	1.39	2.09	2.79	3.48	4.18	5.02	----	----	----	---
0.75	Load	1000	5000	7500	10000	15000	16000	20000	25000	30000	34500	----
	U	0.22	1.09	1.64	2.18	3.28	3.49	4.37	5.46	6.55	7.54	----
	C	0.47	2.35	3.53	4.70	7.06	7.53	----	----	----	----	----
1	Load	1000	2000	5000	7500	9000	10000	12000	14000	14500	----	----
	U	0.69	1.38	3.45	5.18	6.21	6.90	8.28	9.66	10.01	----	----
	C	1.12	2.23	5.58	8.36	10.04	----	----	----	----	----	----
1.25	Load	1000	2000	3000	4000	5000	6000	7000	7500	----	----	----
	U	1.69	3.37	5.06	6.74	8.43	10.11	11.80	12.64	----	----	----
	C	2.18	4.36	6.53	8.71	10.89	13.07	----	----	----	----	----
1.5	Load	1000	2000	3000	3400	3600	----	----	----	----	----	----
	U	3.49	6.99	10.48	11.88	12.58	----	----	----	----	----	----
	C	3.76	7.53	11.29	12.80	----	----	----	----	----	----	----
1.75	Load	1000	1500	2000	2100	----	----	----	----	----	----	----
	U	6.47	9.71	12.95	----	----	----	----	----	----	----	----
	C	5.98	8.96	11.95	12.55	----	----	----	----	----	----	----
2	Load	1000	1150	1450	----	----	----	----	----	----	----	----
	U	11.05	12.70	16.02	----	----	----	----	----	----	----	----
	C	8.92	10.26	12.94	----	----	----	----	----	----	----	----

LOAD N/m.² for Uniform Load or N/m. of Width for Concentrated Center Load. U mm. Deflection for Uniform Load

C mm. Deflection for Concentrated Load

Columns

Columns

Full section column testing was conducted on Treadwell Group's Equal Leg Angles, I-Beams, H-Beams, and Square Tubes. Ultimate stress vs. slenderness ratio curves were developed from the testing. The curves developed are based on the Euler Buckling Stress Equation and a straight line transition from Euler Buckling to ultimate stress

$$\left[\frac{\pi^2 E}{\left(\frac{K}{r} \right)^2} \right]$$

The allowable concentric axial load tables were generated from these curves.


The tables are based on a safety factor of three.

Notation	
A	area (mm. ²)
b	width of flange/leg/wall (mm.)
t	thickness of flange (mm.)
r	minimum radius gyration (mm.)
l	length (m.)
K	effective column length factor
F _a	allowable column concentric axial stress (MPa)
P _a	allowable column centric axial load (N.)


Angle	Maximum allowable stress	
	b/t = 6	41.3MPa
	b/t = 8	33.5MPa
	b/t = 10.7	24.1MPa
	b/t = 12	19.5MPa
	b/t = 16	12.6MPa

WF- & I-Beam	Maximum allowable stress	
	b/t ≤ 12	68.9MPa
	b/t = 13.3	68.9MPa
	b/t = 16	50.5MPa
	b/t = 20	32.3MPa
	b/t = 21.3	28.4MPa
	b/t = 24	22.4MPa
	b/t = 26.7	18.1MPa

Square Hollow Section (6.35mm wall)	Maximum allowable stress	
	b/t ≤ 16	68.9MPa

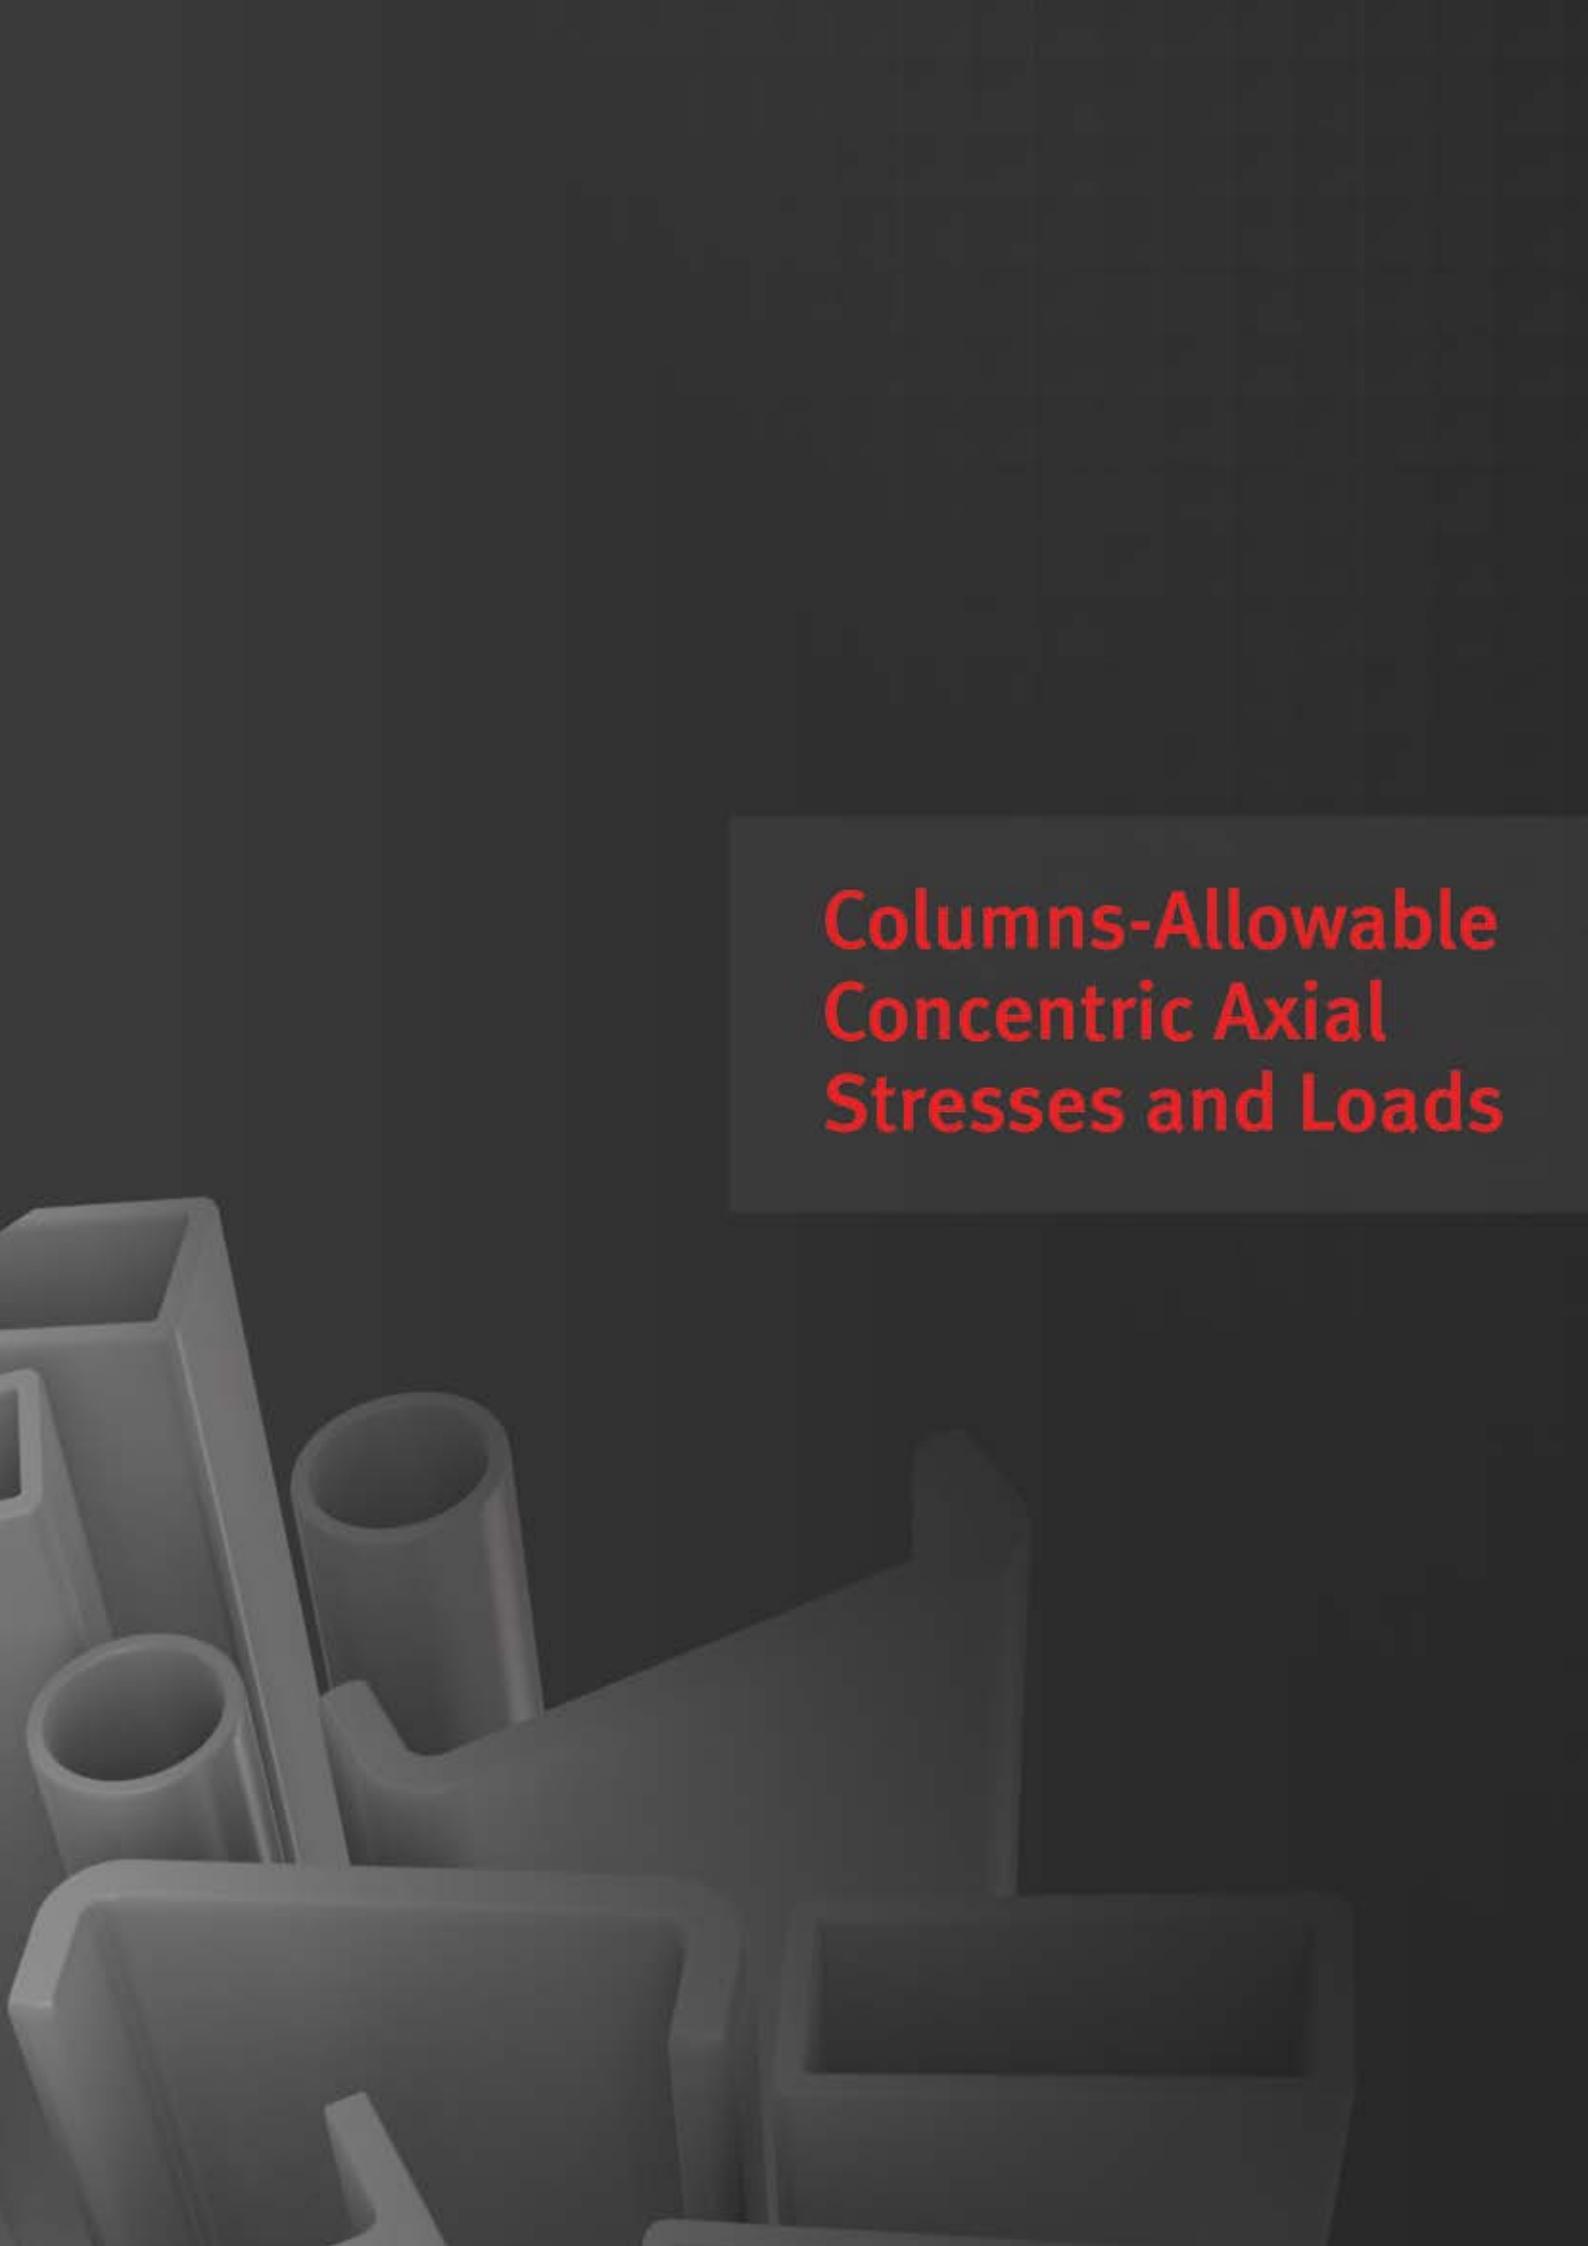

Columns-Allowable Concentric Axial Stresses and Loads

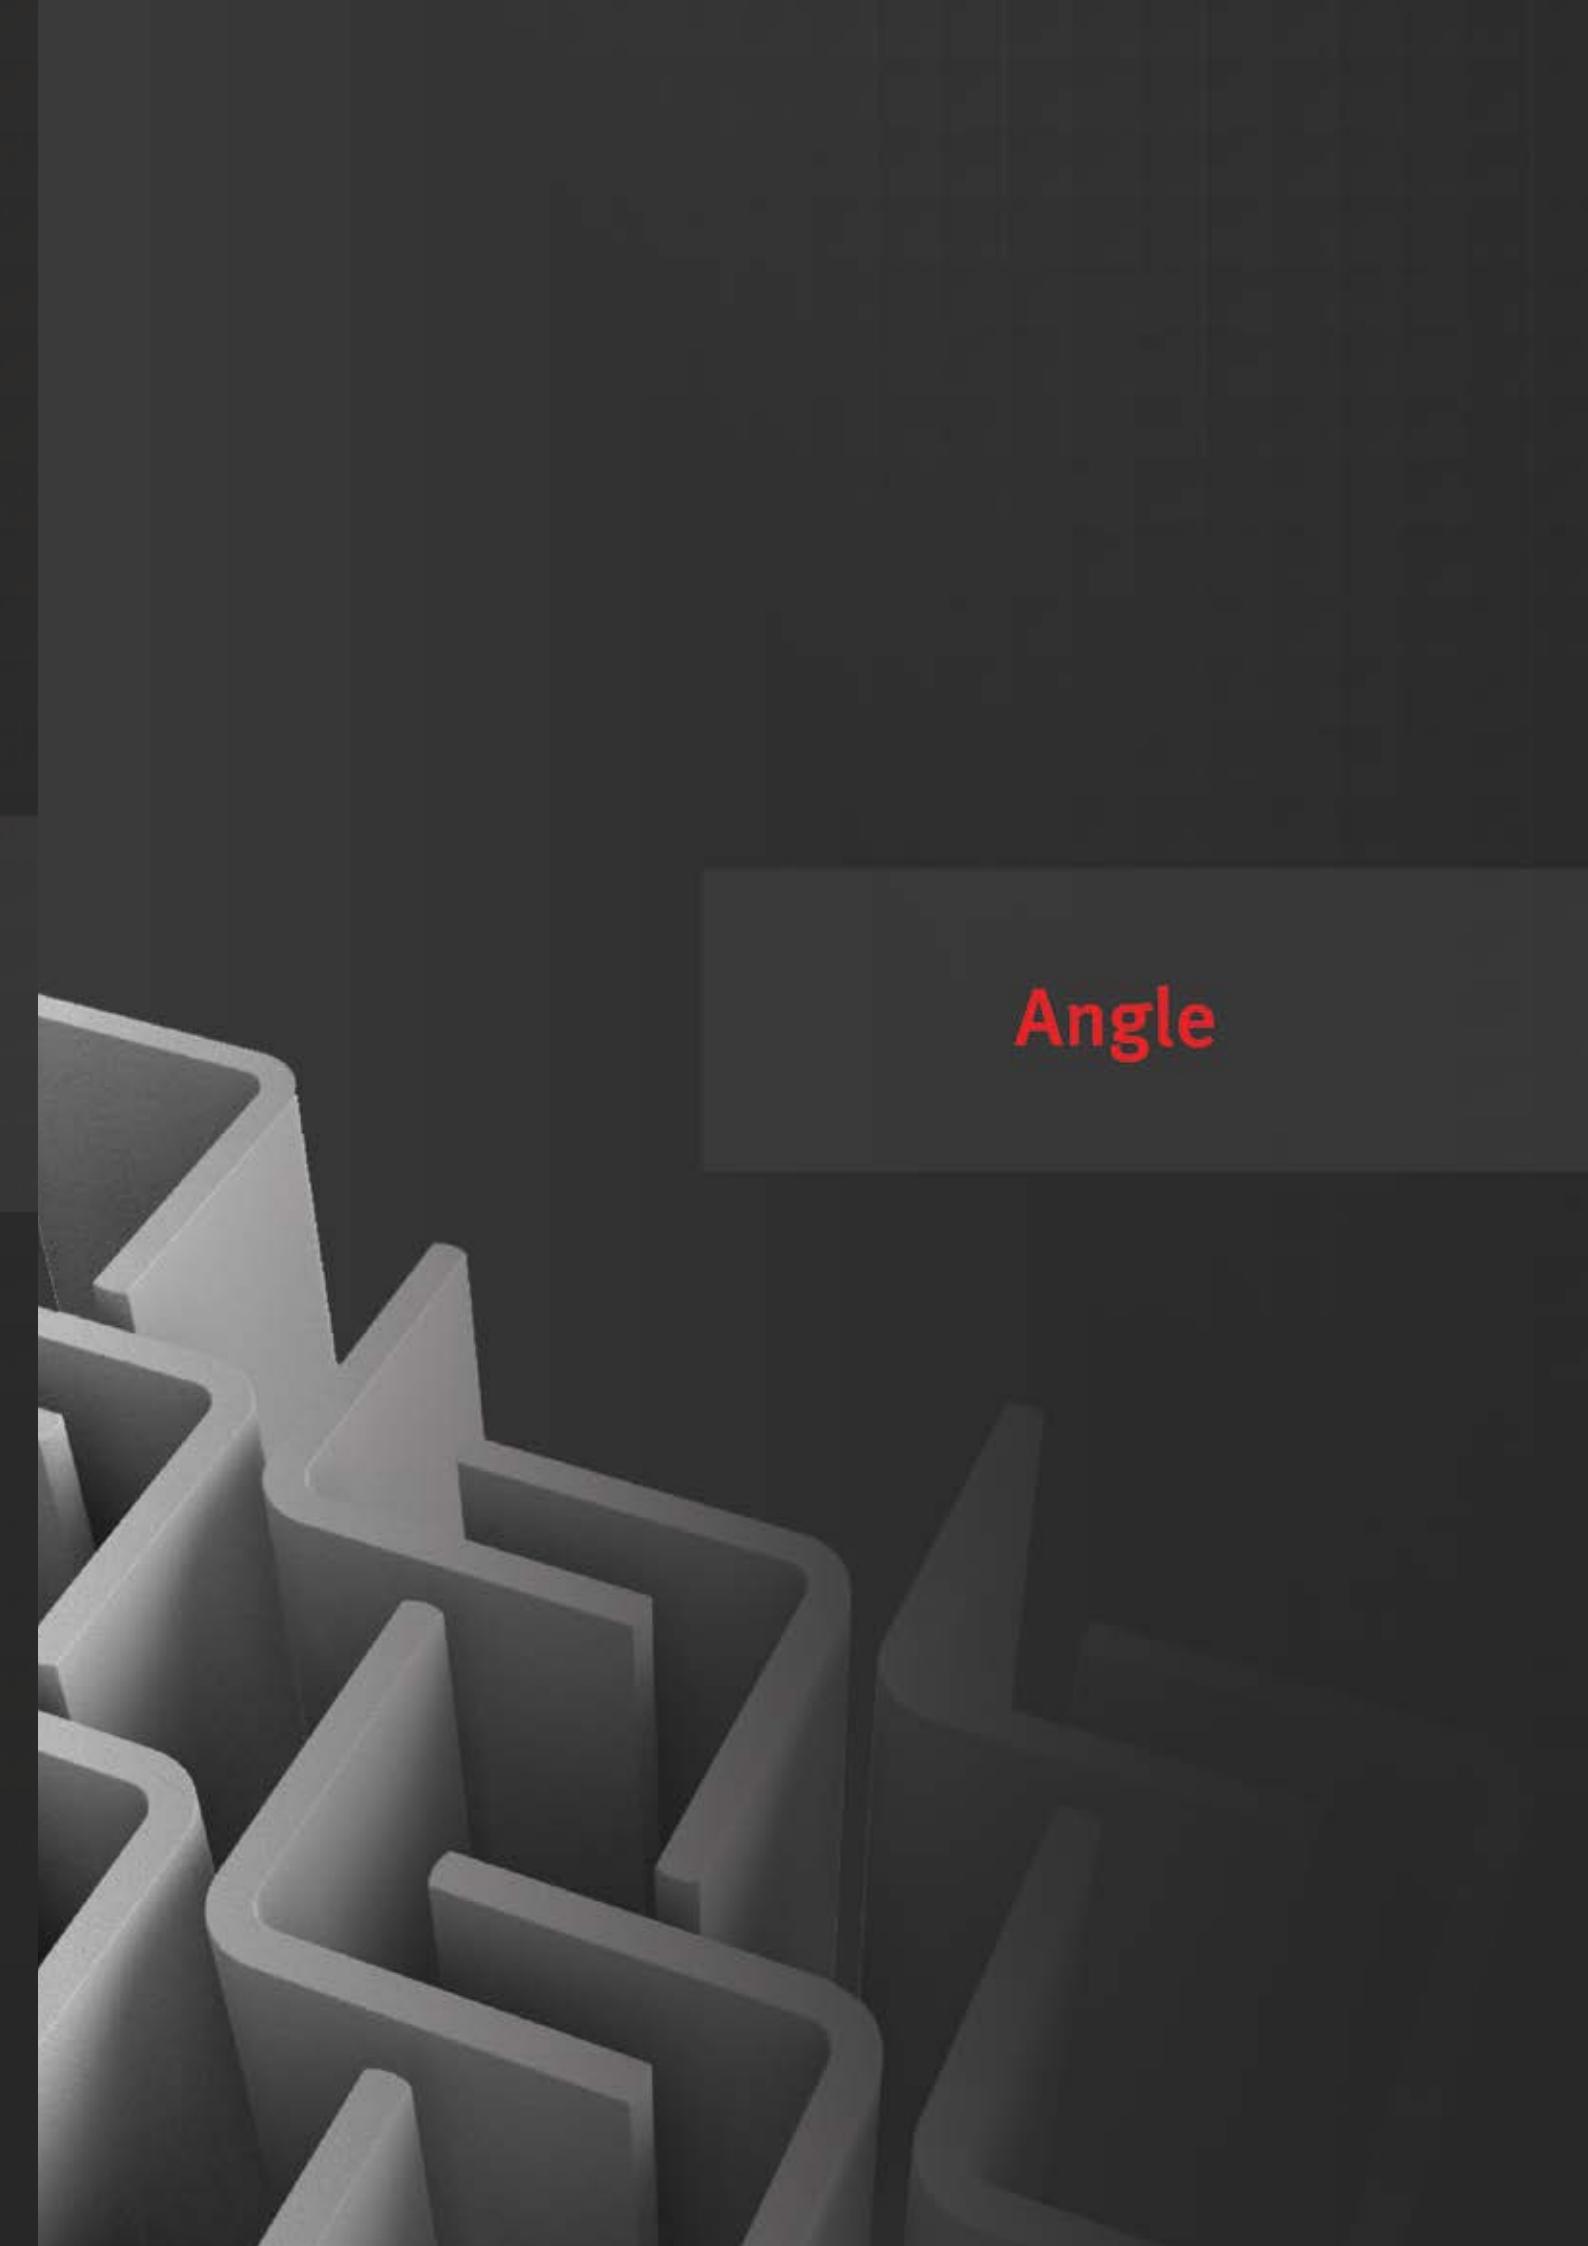


Angle

Columns – Allowable Concentric Axial Stresses and Loads

Part: 50.8 x 50.8 x 6.4mm Angle

Part Number: F-P-ELA(51/51/6.4)

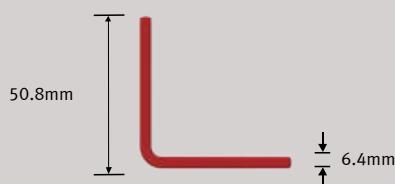

A

593.5mm²


r

9.65mm

Effective Length (m)	F _a (kPa)	P _a (N)
0.30	24207	14368
0.46	19550	11604
0.61	14892	8839
0.76	10234	6075
0.91	7077	4200
1.07	5199	3086
1.22	3981	2363
1.37	3145	1867
1.52	2548	1512
1.68	2105	1250
1.83	1769	1050

Part: 76.2 x 76.2 x 6.4mm Angle

Part Number: F-P-ELA(76/76/6.4)

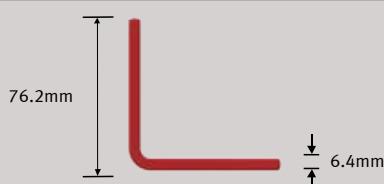

A

916.1mm²

r


14.99mm

Effective Length (m)	F _a (kPa)	P _a (N)
0.30	16852	15438
0.46	15511	14210
0.61	14171	12982
0.76	12830	11754
0.91	11490	10526
1.07	10149	9298
1.22	8809	8070
1.37	7468	6842
1.52	6141	5626
1.68	5075	4650
1.83	4265	3907
1.98	3634	3329
2.13	3133	2871
2.29	2729	2501
2.44	2399	2198
2.59	2125	1947
2.74	1895	1736
2.90	1701	1559

Columns – Allowable Concentric Axial Stresses and Loads

Part: 76.2 x 76.2 x 9.5mm Angle

Part Number: F-P-ELA(76/76/9.5)

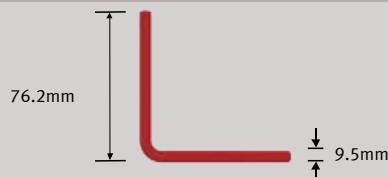

A

1348.4mm²


r

14.99mm

Effective Length (m)	F _a (kPa)	P _a (N)
0.30	27523	37111
0.46	24523	33066
0.61	21523	29021
0.76	18523	24976
0.91	15523	20932
1.07	12524	16887
1.22	9596	12939
1.37	7582	10223
1.52	6141	8281
1.68	5075	6844
1.83	4265	5751
1.98	3634	4900
2.13	3133	4225
2.29	2729	3680
2.44	2399	3235
2.59	2125	2865
2.74	1895	2556
2.90	1701	2294

Part: 76.2 x 76.2 x 12.7mm Angle

Part Number: F-P-ELA(76/76/12.7)

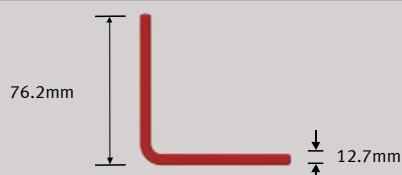

A

1741.9mm²

r

14.99mm

Effective Length (m)	F _a (kPa)	P _a (N)
0.30	33326	58051
0.46	29304	51046
0.61	25283	44041
0.76	21262	37036
0.91	17059	29716
1.07	12533	21832
1.22	9596	16715
1.37	7582	13207
1.52	6141	10698
1.68	5075	8841
1.83	4265	7429
1.98	3634	6330
2.13	3133	5458
2.29	2729	4755
2.44	2399	4179
2.59	2125	3702
2.74	1895	3302
2.90	1701	2963


Columns – Allowable Concentric Axial Stresses and Loads

Part: 101.6 x 101.6 x 6.4mm Angle			
Part Number: F-P-ELA(102/102/6.4)			
Effective Length (m)	F _a (kPa)	A	P _a (N)
0.30	11610	1225.8mm ²	14381
0.46	11095	20.32mm	13744
0.61	10581		13107
0.76	10067		12470
0.91	9553		11833
1.07	9039		11196
1.22	8524		10559
1.37	8010		9922
1.52	7496		9285
1.68	6982		8648
1.83	6467		8011
1.98	5953		7374
2.13	5439		6737
2.29	4925		6100
2.44	4411		5463
2.59	3907		4840
2.74	3485		4317
2.90	3128		3874
3.05	2823		3497

Columns – Allowable Concentric Axial Stresses and Loads

Part: 101.6 x 101.6 x 9.5mm Angle

Part Number: F-P-ELA(102/102/9.5)

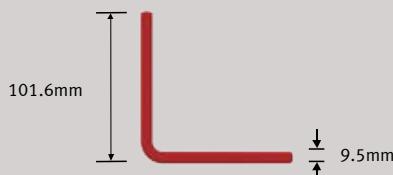

A

1832.3mm²

r

20.07mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	21388	39188
0.46	20013	36668
0.61	18637	34148
0.76	17262	31628
0.91	15887	29108
1.07	14511	26588
1.22	13136	24068
1.37	11761	21549
1.52	10385	19029
1.68	9010	16509
1.83	7646	14010
1.98	6515	11937
2.13	5618	10293
2.29	4894	8966
2.44	4301	7881
2.59	3810	6981
2.74	3398	6227
2.90	3050	5588
3.05	2753	5044
3.20	2497	4575
3.35	2275	4168
3.51	2081	3814
3.66	1912	3502
3.81	1762	3228

Columns – Allowable Concentric Axial Stresses and Loads


Part: 101.6 x 101.6 x 12.7mm Angle		
Part Number: F-P-ELA(102/102/12.7)		
	A	2387.1mm ²
	r	19.81mm
Effective Length (m)	F _a (kPa)	P _a (N)
0.30	28984	69188
0.46	26715	63771
0.61	24446	58355
0.76	22177	52938
0.91	19908	47522
1.07	17639	42105
1.22	15370	36689
1.37	13101	31272
1.52	10831	25856
1.68	8871	21175
1.83	7454	17793
1.98	6351	15161
2.13	5476	13072
2.29	4770	11388
2.44	4193	10009
2.59	3714	8866
2.74	3313	7908
2.90	2973	7098
3.05	2683	6406
3.20	2434	5810
3.35	2218	5294
3.51	2029	4843
3.66	1863	4448

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 152.4 x 9.4mm Angle			
		A	2794mm ²
		r	28.96mm
Effective Length (m)	F _a (kPa)	A	P _a (N)
0.30	11916		33289
0.46	11556		32281
0.61	11195		31273
0.76	10834		30265
0.91	10473		29257
1.07	10112		28249
1.22	9751		27241
1.37	9390		26232
1.52	9030		25224
1.68	8669		24216
1.83	8308		23208
1.98	7947		22200
2.13	7586		21192
2.29	7225		20184
2.44	6864		19176
2.59	6504		18168
2.74	6143		17160
2.90	5782		16152
3.05	5421		15144
3.20	5060		14136
3.35	4699		13128
3.51	4334		12108
3.66	3981		11120
3.81	3668		10248
3.96	3392		9475
4.12	3145		8786
4.27	2924		8170
4.42	2726		7616
4.57	2548		7117
4.72	2386		6665
4.88	2239		6255
5.03	2105		5882
5.18	1983		5541
5.33	1872		5229
5.49	1769		4942
5.64	1675		4679
5.79	1588		4436

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 152.4 x 12.7mm Angle			
	A	3677.4mm ²	
	r	30.2mm	
Effective Length (m)	F_a (kPa)	P_a (N)	
0.30	18204	66942	
0.46	17539	64498	
0.61	16874	62054	
0.76	16210	59610	
0.91	15545	57166	
1.07	14881	54722	
1.22	14216	52278	
1.37	13551	49834	
1.52	12887	47390	
1.68	12222	44945	
1.83	11557	42501	
1.98	10893	40057	
2.13	10228	37613	
2.29	9564	35169	
2.44	8899	32725	
2.59	8234	30281	
2.74	7570	27837	
2.90	6905	25393	
3.05	6246	22968	
3.20	5665	20833	
3.35	5162	18982	
3.51	4723	17367	
3.66	4337	15950	
3.81	3997	14700	
3.96	3696	13591	
4.12	3427	12603	
4.27	3187	11719	
4.42	2971	10924	
4.57	2776	10208	
4.72	2600	9560	
4.88	2440	8972	
5.03	2294	8437	
5.18	2161	7948	
5.33	2039	7500	
5.49	1928	7089	
5.64	1825	6711	
5.79	1730	6362	

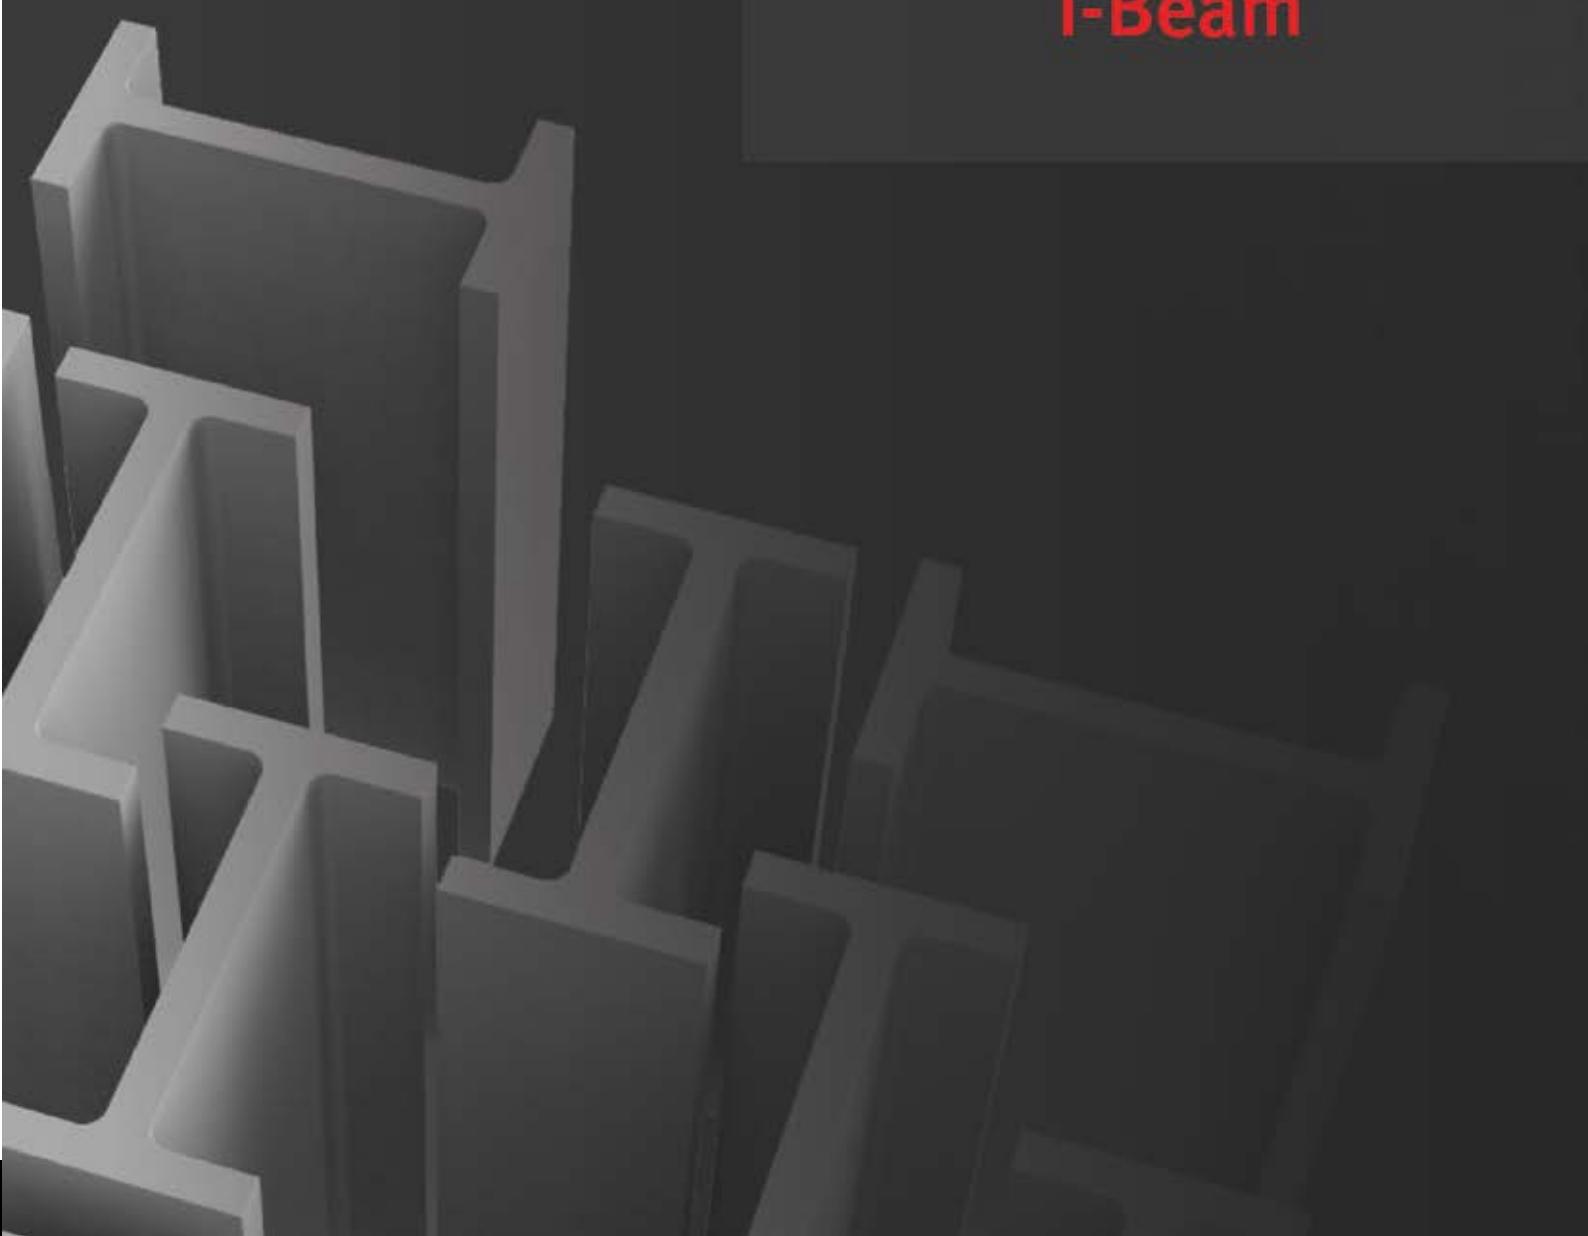A dark gray background featuring a stack of white I-beam metal profiles. The beams are oriented vertically and overlap each other, creating a sense of depth. The lighting highlights the top and bottom flanges and the central web of the I-beams.


I-Beam

Columns – Allowable Concentric Axial Stresses and Loads

76.2 x 38.1 x 6.4mm I-Beam			
Effective Length (m)	A	Properties	
	r	8mm	890mm ²
0.30	36164		32198
0.46	20073		17871
0.61	11291		10053
0.76	7226		6434
0.91	5018		4468
1.07	3687		3283
1.22	2823		2513
1.37	2230		1986
1.52	1807		1608
1.68	1493		1329
1.83	1255		1117
1.98	1069		952
2.13	922		821
2.29	803		715
2.44	706		628
2.59	625		557
2.74	558		496
2.90	500		446
3.05	452		402
3.20	410		365
3.35	373		332
3.51	342		304
3.66	314		279
3.81	289		257
3.96	267		238
4.12	248		221
4.27	230		205
4.42	215		191
4.57	201		179
4.72	188		167
4.88	176		157
5.03	166		148
5.18	156		139
5.33	147		131
5.49	139		124
5.64	132		117
5.79	125		111
5.94	119		106
6.10	113		101

Columns – Allowable Concentric Axial Stresses and Loads

101.6 x 50.8 x 6.4mm I-Beam



A

1213mm²


r

11mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	44551	54036
0.46	32352	39240
0.61	20388	24728
0.76	13408	15823
0.91	9061	10990
1.07	6657	8075
1.22	5097	6182
1.37	4027	4885
1.52	3262	3957
1.68	2696	3270
1.83	2265	2748
1.98	1930	2341
2.13	1664	2019
2.29	1450	1758
2.44	1274	1546
2.59	1129	1369
2.74	1007	1221
2.90	904	1096
3.05	816	989
3.20	740	897
3.35	674	817
3.51	617	748
3.66	566	687
3.81	522	633
3.96	483	585
4.12	447	543
4.27	416	505
4.42	388	470
4.57	362	440
4.72	339	412
4.88	319	386
5.03	300	363
5.18	282	342
5.33	266	323
5.49	252	305
5.64	238	289
5.79	226	274
5.94	214	260
6.10	204	247

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 76.2 x 6.4mm I-Beam



A

1858mm²


r

16mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	44551	54036
0.46	32352	39240
0.61	20388	24728
0.76	13048	15823
0.91	9061	10990
1.07	6657	8075
1.22	5097	6182
1.37	4027	4885
1.52	3262	3957
1.68	2696	3270
1.83	2265	2748
1.98	1930	2341
2.13	1664	2019
2.29	1450	1758
2.44	1274	1546
2.59	1129	1369
2.74	1007	1221
2.90	904	1096
3.05	816	989
3.20	740	897
3.35	674	817
3.51	617	748
3.66	566	687
3.81	522	633
3.96	483	585
4.12	447	543
4.27	416	505
4.42	388	470
4.57	362	440
4.72	339	412
4.88	319	386
5.03	300	363
5.18	282	342
5.33	266	323
5.49	252	305
5.64	238	289
5.79	226	274
5.94	214	260
6.10	204	247

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 76.2 x 9.5mm I-Beam



A

2729mm²


r

16mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	52556	143427
0.46	44360	121060
0.61	36164	98694
0.76	27969	76327
0.91	20073	54780
1.07	14748	40246
1.22	11291	30814
1.37	8921	24347
1.52	7226	19721
1.68	5972	16298
1.83	5018	13695
1.98	4276	11669
2.13	3687	10062
2.29	3212	8765
2.44	2823	7703
2.59	2500	6824
2.74	2230	6087
2.90	2002	5463
3.05	1807	4930
3.20	1639	4472
3.35	1493	4075
3.51	1366	3728
3.66	1255	3424
3.81	1156	3155
3.96	1069	2917
4.12	991	2705
4.27	922	2515
4.42	859	2345
4.57	803	2191
4.72	752	2052
4.88	706	1926
5.03	664	1811
5.18	625	1706
5.33	590	1610
5.49	558	1522
5.64	528	1441
5.79	500	1366
5.94	475	1297
6.10	452	1233

Columns – Allowable Concentric Axial Stresses and Loads

203.2 x 101.6 x 9.5mm I-Beam



A

3697mm²

r

21mm


Effective Length (m)	F_a (kPa)	P_a (N)
0.30	56459	208715
0.46	50214	185631
0.61	43970	162547
0.76	37726	139462
0.91	31481	116378
1.07	25237	93294
1.22	19451	71904
1.37	15368	56813
1.52	12448	46019
1.68	10288	38032
1.83	8645	31958
1.98	7366	27230
2.13	6351	23479
2.29	5533	20453
2.44	4863	17976
2.59	4307	15923
2.74	3842	14203
2.90	3448	12748
3.05	3112	11505
3.20	2823	10435
3.35	2572	9508
3.51	2353	8699
3.66	2161	7989
3.81	1992	7363
3.96	1841	6808
4.12	1708	6313
4.27	1588	5870
4.42	1480	5472
4.57	1383	5113
4.72	1295	4789
4.88	1216	4494
5.03	1143	4226
5.18	1077	3981
5.33	1016	3757
5.49	961	3551
5.64	909	3361
5.79	862	3187
5.94	818	3026
6.10	778	2876

Columns – Allowable Concentric Axial Stresses and Loads

203.2 x 101.6 x 12.7mm I-Beam			
Effective Length (m)	A	r	P _a (N)
0.30	4845 mm ²	22mm	274263
0.46			244364
0.61			214465
0.76			184566
0.91			154666
1.07			124767
1.22			96498
1.37			76246
1.52			61759
1.68			51040
1.83			42888
1.98			36544
2.13			31510
2.29			27448
2.44			24125
2.59			21370
2.74			19061
2.90			17108
3.05			15440
3.20			14004
3.35			12760
3.51			11675
3.66			10722
3.81			9881
3.96			9136
4.12			8472
4.27			7877
4.42			7344
4.57			6862
4.72			6427
4.88			6031
5.03			5671
5.18			5342
5.33			5042
5.49			4765
5.64			4511
5.79			4277
5.94			4060
6.10			3860

Columns – Allowable Concentric Axial Stresses and Loads

254 x 127 x 9.5mm I-Beam



A

4658mm²


r

26mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	58860	274175
0.46	53817	250682
0.61	48773	227189
0.76	43730	203696
0.91	38686	180202
1.07	33643	156709
1.22	28599	133216
1.37	23556	109723
1.52	19082	88885
1.68	15770	73458
1.83	13251	61725
1.98	11291	52594
2.13	9736	45349
2.29	8481	39504
2.44	7454	34721
2.59	6603	30756
2.74	5889	27434
2.90	5286	24622
3.05	4770	22221
3.20	4327	20155
3.35	3943	18365
3.51	3607	16802
3.66	3313	15431
3.81	3053	14222
3.96	2823	13149
4.12	2618	12193
4.27	2434	11337
4.42	2269	10569
4.57	2120	9876
4.72	1986	9249
4.88	1863	8680
5.03	1752	8162
5.18	1651	7689
5.33	1558	7256
5.49	1472	6858
5.64	1394	6493
5.79	1321	6155
5.94	1255	5844
6.10	1193	5555

Columns – Allowable Concentric Axial Stresses and Loads

254 x 127 x 12.7mm I-Beam



A

6135mm²

r

26mm

Effective Length (m)	F _a (kPa)	P _a (N)
0.30	58860	361137
0.46	53817	330192
0.61	48773	299247
0.76	43730	268303
0.91	38686	237358
1.07	33643	206413
1.22	28599	175469
1.37	23556	144524
1.52	19082	117076
1.68	15770	96757
1.83	13251	81303
1.98	11291	69276
2.13	9736	59733
2.29	8481	52034
2.44	7454	45733
2.59	6603	40511
2.74	5889	36135
2.90	5286	32431
3.05	4770	29269
3.20	4327	26548
3.35	3943	24189
3.51	3607	22132
3.66	3313	20326
3.81	3053	18732
3.96	2823	17319
4.12	2618	16060
4.27	2434	14933
4.42	2269	13921
4.57	2120	13008
4.72	1986	12183
4.88	1863	11433
5.03	1752	10751
5.18	1651	10128
5.33	1558	9557
5.49	1472	9034
5.64	1394	8552
5.79	1321	8108
5.94	1255	7697
6.10	1193	7317


Columns – Allowable Concentric Axial Stresses and Loads

304.8 x 152.4 x 12.7mm I-Beam				
Effective Length (m)	A	F _a (kPa)		P _a (N)
	r	7426mm ²		32mm
0.30		60622		450164
0.46		56459		419251
0.61		52296		388338
0.76		48133		357425
0.91		43970		326512
1.07		39807		295598
1.22		35644		264685
1.37		31481		233772
1.52		27318		202859
1.68		23148		171891
1.83		19451		144436
1.98		16573		123070
2.13		14290		106116
2.29		12448		92439
2.44		10941		81245
2.59		9692		71968
2.74		8645		64194
2.90		7759		57614
3.05		7002		51997
3.20		6351		47163
3.35		5787		42973
3.51		5295		39317
3.66		4863		36109
3.81		4481		33278
3.96		4143		30767
4.12		3842		28531
4.27		3573		26529
4.42		3330		24731
4.57		3112		23110
4.72		2915		21643
4.88		2735		20311
5.03		2572		19099
5.18		2423		17992
5.33		2286		16979
5.49		2161		16048
5.64		2046		15193
5.79		1940		14404
5.94		1841		13674
6.10		1751		12999




WF-Beam

Columns – Allowable Concentric Axial Stresses and Loads

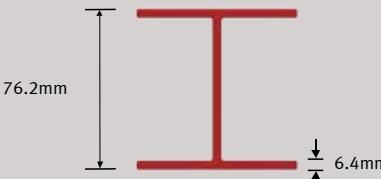76.2 x 76.2 x 6.4mm WF-Beam			
	A	r	
	1374.19mm ²	18.54mm	
Effective Length (m)	F _a (kPa)	P _a (N)	
0.30	54577	74999	
0.46	47392	65125	
0.61	40206	55251	
0.76	33021	45377	
0.91	25835	35503	
1.07	19187	26366	
1.22	14690	20187	
1.37	11607	15950	
1.52	9402	12920	
1.68	7770	10677	
1.83	6529	8972	
1.98	5563	7645	
2.13	4797	6592	
2.29	4178	5742	
2.44	3672	5047	
2.59	3253	4470	
2.74	2902	3988	
2.90	2604	3579	
3.05	2350	3230	
3.20	2132	2930	
3.35	1942	2669	
3.51	1777	2442	
3.66	1632	2243	

Columns – Allowable Concentric Axial Stresses and Loads

101.6 x 101.6 x 6.4mm WF-Beam

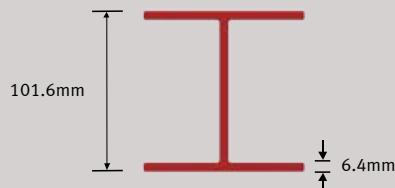

A

1864.51mm²

r

24.38mm


Effective Length (m)	F _a (kPa)	P _a (N)
0.30	43630	81348
0.46	40217	74984
0.61	36804	68621
0.76	33390	62257
0.91	29977	55893
1.07	26564	49529
1.22	23151	43166
1.37	19738	36802
1.52	16325	30438
1.68	13437	25054
1.83	11291	21052
1.98	9621	17938
2.13	8295	15467
2.29	7226	13473
2.44	6351	11842
2.59	5626	10490
2.74	5018	9357
2.90	4504	8398
3.05	4065	7579
3.20	3687	6874
3.35	3359	6264
3.51	3074	5731
3.66	2823	5263
3.81	2601	4850
3.96	2405	4485
4.12	2230	4158
4.27	2074	3867
4.42	1933	3605
4.57	1807	3368
4.72	1692	3155
4.88	1588	2960

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 152.4 x 6.4mm WF-Beam			
Effective Length (m)	A	r	P _a (N)
	2832.25mm ²	36.32mm	
0.30	21067		59668
0.46	20387		57740
0.61	19706		55812
0.76	19025		53884
0.91	18345		51957
1.07	17664		50029
1.22	16983		48101
1.37	16303		46173
1.52	15622		44245
1.68	14941		42317
1.83	14261		40390
1.98	13580		38462
2.13	12899		36534
2.29	12219		34606
2.44	11538		32678
2.59	10857		30750
2.74	10177		28823
2.90	9496		26895
3.05	8815		24967
3.20	8135		23039
3.35	7454		21111
3.51	6820		19315
3.66	6263		17739
3.81	5772		16349
3.96	5337		15115
4.12	4949		14016
4.27	4602		13033
4.42	4290		12150
4.57	4009		11353
4.72	3754		10633
4.88	3523		9978
5.03	3313		9383
5.18	3121		8839
5.33	2945		8341
5.49	2784		7884
5.64	2635		7464
5.79	2498		7076
5.94	2372		6718
6.10	2255		6386

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 152.4 x 9.5mm WF-Beam

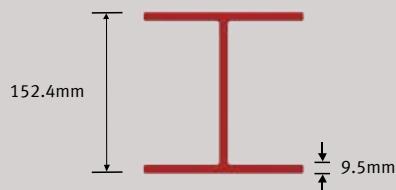

A

4180.64mm²

r

36.58mm


Effective Length (m)	F_a (kPa)	P_a (N)
0.30	45905	191912
0.46	43630	182400
0.61	41354	172887
0.76	39079	163375
0.91	36804	153862
1.07	34528	144350
1.22	32253	134837
1.37	29977	125324
1.52	27702	115812
1.68	25427	106299
1.83	23151	96787
1.98	20876	87274
2.13	18600	77762
2.29	16325	68249
2.44	14290	59742
2.59	12658	52921
2.74	11291	47204
2.90	10134	42366
3.05	9146	38235
3.20	8295	34680
3.35	7558	31599
3.51	6916	28911
3.66	6351	26552
3.81	5853	24470
3.96	5412	22624
4.12	5018	20979
4.27	4666	19508
4.42	4350	18186
4.57	4065	16993
4.72	3807	15915
4.88	3573	14936
5.03	3359	14044
5.18	3165	13230
5.33	2986	12485
5.49	2823	11801
5.64	2672	11172
5.79	2533	10591
5.94	2405	10055
6.10	2286	9559

Columns – Allowable Concentric Axial Stresses and Loads

203.2 x 203.2 x 9.5mm WF-Beam			
Effective Length (m)	A	r	P _a (N)
	5632.25mm ²	48.77mm	
0.30	26943		151752
0.46	26222		147690
0.61	25501		143628
0.76	24780		139566
0.91	24059		135505
1.07	23338		131443
1.22	22616		127381
1.37	21895		123319
1.52	21174		119257
1.68	20453		115196
1.83	19732		111134
1.98	19011		107072
2.13	18289		103010
2.29	17568		98948
2.44	16847		94887
2.59	16126		90825
2.74	15405		86763
2.90	14684		82701
3.05	13962		78639
3.20	13241		74578
3.35	12520		70516
3.51	11799		66454
3.66	11078		62392
3.81	10356		58330
3.96	9621		54187
4.12	8921		50247
4.27	8295		46722
4.42	7733		43556
4.57	7226		40700
4.72	6768		38117
4.88	6351		35772
5.03	5972		33637
5.18	5626		31687
5.33	5309		29902
5.49	5018		28264
5.64	4751		26757
5.79	4504		25367
5.94	4276		24083
6.10	4065		22894

Columns – Allowable Concentric Axial Stresses and Loads

203.2 x 203.2 x 12.7mm WF-Beam

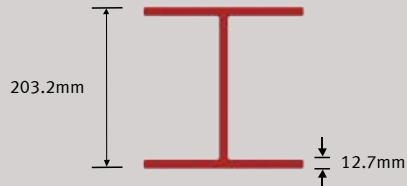

A

7425.79mm²

r

49.02mm


Effective Length (m)	F_a (kPa)	P_a (N)
0.30	47060	349461
0.46	45363	336854
0.61	43665	324248
0.76	41967	311641
0.91	40270	299034
1.07	38572	286427
1.22	36874	273821
1.37	35177	261214
1.52	33479	248607
1.68	31781	236000
1.83	30083	223394
1.98	28386	210787
2.13	26688	198180
2.29	24990	185573
2.44	23293	172967
2.59	21595	160360
2.74	19897	147753
2.90	18200	135146
3.05	16502	122540
3.20	14902	110656
3.35	13578	100825
3.51	12423	92248
3.66	11409	84721
3.81	10515	78079
3.96	9721	72188
4.12	9015	66940
4.27	8382	62244
4.42	7814	58025
4.57	7302	54221
4.72	6838	50780
4.88	6418	47655
5.03	6035	44811
5.18	5685	42214
5.33	5365	39836
5.49	5071	37654
5.64	4800	35646
5.79	4551	33794
5.94	4321	32084
6.10	4107	30499

Columns – Allowable Concentric Axial Stresses and Loads

254.0 x 254.0 x 9.5mm WF-Beam			
Effective Length (m)	A	r	P _a (N)
0.30	7135.47mm ²	60.45mm	125384
0.46			123258
0.61			121133
0.76			119007
0.91			116881
1.07			114756
1.22			112630
1.37			110504
1.52			108379
1.68			106253
1.83			104128
1.98			102002
2.13			99876
2.29			97751
2.44			95625
2.59			93500
2.74			91374
2.90			89248
3.05			87123
3.20			84997
3.35			82871
3.51			80746
3.66			78620
3.81			76495
3.96			74369
4.12			72243
4.27			70118
4.42			67992
4.57			65867
4.72			63741
4.88			61615
5.03			59490
5.18			57364
5.33			55239
5.49			53113
5.64			50987
5.79			48862
5.94			46736
6.10			44567

Columns – Allowable Concentric Axial Stresses and Loads

254.0 x 254.0 x 12.7mm WF-Beam

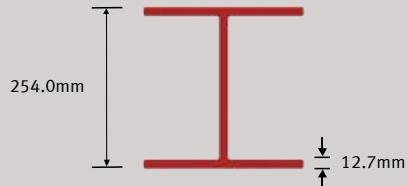

A

9361.27mm²


r

60.96mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	30894	289205
0.46	30193	282646
0.61	29493	276088
0.76	28792	269529
0.91	28091	262970
1.07	27391	256411
1.22	26690	249852
1.37	25989	243294
1.52	25289	236735
1.68	24588	230176
1.83	23887	223617
1.98	23187	217058
2.13	22486	210500
2.29	21786	203941
2.44	21085	197382
2.59	20384	190823
2.74	19684	184264
2.90	18983	177706
3.05	18282	171147
3.20	17582	164588
3.35	16881	158029
3.51	16181	151471
3.66	15480	144912
3.81	14779	138353
3.96	14079	131794
4.12	13378	125235
4.27	12677	118677
4.42	11977	112118
4.57	11276	105559
4.72	10574	98989
4.88	9924	92899
5.03	9331	87354
5.18	8791	82291
5.33	8295	77656
5.49	7841	73402
5.64	7423	69488
5.79	7037	65879
5.94	6681	62544
6.10	6351	59456

Columns – Allowable Concentric Axial Stresses and Loads

304.8 x 304.8 x 12.7mm WF-Beam			
Effective Length (m)	A	r	P _a (N)
0.30	11296.75mm ²	72.90mm	245708
0.46			241877
0.61			238046
0.76			234214
0.91			230383
1.07			226552
1.22			222721
1.37			218889
1.52			215058
1.68			211227
1.83			207395
1.98			203564
2.13			199733
2.29			195902
2.44			192070
2.59			188239
2.74			184408
2.90			180576
3.05			176745
3.20			172914
3.35			169083
3.51			165251
3.66			161420
3.81			157589
3.96			153757
4.12			149926
4.27			146095
4.42			142264
4.57			138432
4.72			134601
4.88			130770
5.03			126938
5.18			123107
5.33			119276
5.49			115445
5.64			111613
5.79			107782
5.94			103951
6.10			100119

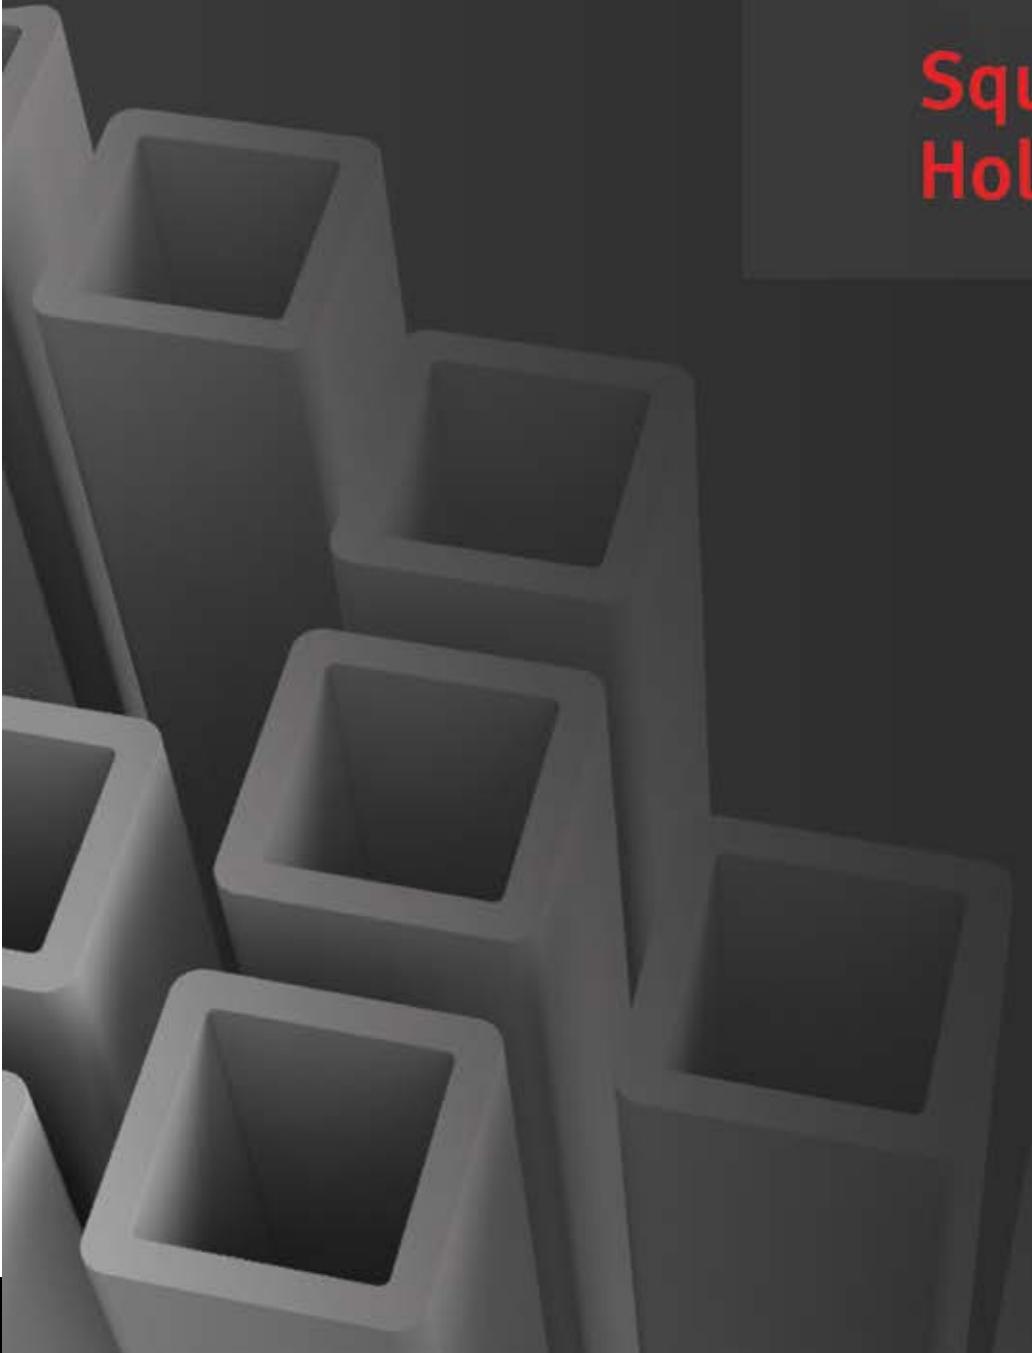A dark gray background featuring a vertical stack of several square hollow sections. The sections are oriented vertically and overlap slightly, creating a sense of depth. They have a thick, light-colored border and a dark, hollow center.


Square Hollow Section

Columns – Allowable Concentric Axial Stresses and Loads


50.8 x 50.8 x 6.4mm Square Hollow Section			
	A		
	r		
Effective Length (m)	F _a (kPa)	P _a (N)	
0.30	54577	61267	
0.46	47395	53201	
0.61	40206	45135	
0.76	33021	37068	
0.91	25835	29002	
1.07	19187	21539	
1.22	14690	16491	
1.37	11607	13030	
1.52	9402	10554	
1.68	7770	8722	
1.83	6529	7329	
1.98	5563	6245	
2.13	4797	5385	
2.29	4178	4691	
2.44	3672	4123	
2.59	3253	3652	
2.74	2902	3257	
2.90	2604	2924	
3.05	2350	2639	
3.20	2132	2393	
3.35	1942	2181	
3.51	1777	1995	
3.66	1632	1832	

Columns – Allowable Concentric Axial Stresses and Loads

38.1 x 38.1 x 6.4mm Square Hollow Section


 38.1mm ↓ 6.4mm	A	800.0mm ²
	r	13.21mm
Effective Length (m)	F _a (kPa)	P _a (N)
0.30	48773	39019
0.46	38686	30949
0.61	28599	22879
0.76	19082	15265
0.91	13251	10601
1.07	9736	7789
1.22	7454	5963
1.37	5889	4712
1.52	4770	3816
1.68	3943	3154
1.83	3313	2650
1.98	2823	2258
2.13	2434	1947
2.29	2120	1696
2.44	1863	1491
2.59	1651	1321

44.5 x 44.5 x 6.4mm Square Hollow Section

 44.5mm ↓ 6.4mm	A	961.29mm ²
	r	15.75mm
Effective Length (m)	F _a (kPa)	P _a (N)
0.30	52027	50015
0.46	43367	41881
0.61	35107	33748
0.76	26647	25615
0.91	18838	18109
1.07	13840	13304
1.22	10596	10186
1.37	8372	8048
1.52	6782	6519
1.68	5605	5388
1.83	4710	4527
1.98	4013	3857
2.13	3460	3326
2.29	3014	2897
2.44	2649	2547
2.59	2347	2256
2.74	2093	2012
2.90	1879	1806
3.05	1695	1630

Columns – Allowable Concentric Axial Stresses and Loads

67.2 x 67.2 x 6.4mm Square Hollow Section

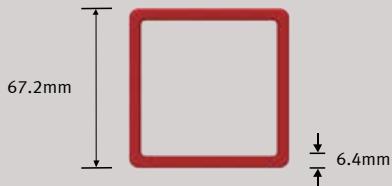

A

1445.16mm²

r

23.37mm


Effective Length (m)	F_a (kPa)	P_a (N)
0.30	57545	83161
0.46	51843	74922
0.61	46142	66682
0.76	40440	58443
0.91	34739	50203
1.07	29038	41964
1.22	23332	33718
1.37	18435	26642
1.52	14932	21580
1.68	12341	17834
1.83	10370	14986
1.98	8836	12769
2.13	7619	11010
2.29	6637	9591
2.44	5833	8430
2.59	5167	7467
2.74	4609	6660
2.90	4136	5978
3.05	3733	5395
3.20	3386	4893
3.35	3085	4459
3.51	2823	4079
3.66	2592	3746
3.81	2389	3453
3.96	2209	3192
4.12	2048	2960
4.27	1905	2753
4.42	1776	2566
4.57	1659	2398

Columns – Allowable Concentric Axial Stresses and Loads

76.2 x 76.2 x 6.4mm Square Hollow Section			
	A	r	
76.2mm	1767.74mm ²	28.70mm	
6.4mm			
Effective Length (m)	F _a (kPa)	P _a (N)	
0.30	59964	105470	
0.46	55022	97264	
0.61	50380	89059	
0.76	45738	80853	
0.91	41096	72648	
1.07	36455	64442	
1.22	31813	56236	
1.37	27171	48031	
1.52	22527	39823	
1.68	18618	32911	
1.83	15644	27655	
1.98	13330	23564	
2.13	11494	20318	
2.29	10012	17699	
2.44	8800	15556	
2.59	7795	13779	
2.74	6953	12291	
2.90	6240	11031	
3.05	5632	9956	
3.20	5108	9030	
3.35	4654	8228	
3.51	4258	7528	
3.66	3911	6914	
3.81	3604	6372	
3.96	3332	5891	
4.12	3090	5463	
4.27	2873	5079	
4.42	2679	4735	
4.57	2503	4425	
4.72	2344	4144	
4.88	2200	3889	
5.03	2069	3657	
5.18	1949	3445	
5.33	1839	3251	
5.49	1738	3073	
5.64	1646	2909	

Columns – Allowable Concentric Axial Stresses and Loads

88.9 x 88.9 x 6.4mm Square Hollow Section

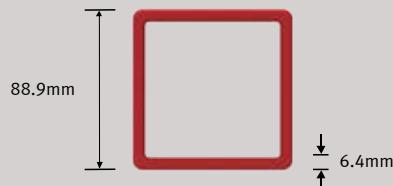

A

1767.74mm²

r

28.70mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	61000	127510
0.46	57026	119203
0.61	53053	110897
0.76	49079	102591
0.91	45105	94284
1.07	41132	85978
1.22	37158	77672
1.37	33184	69365
1.52	29210	61059
1.68	25237	52753
1.83	21347	44622
1.98	18189	38021
2.13	15684	32784
2.29	13662	28558
2.44	12008	25100
2.59	10637	22234
2.74	9488	19832
2.90	8515	17800
3.05	7685	16064
3.20	6971	14571
3.35	6351	13276
3.51	5811	12147
3.66	5337	11156
3.81	4918	10281
3.96	4547	9505
4.12	4217	8814
4.27	3921	8196
4.42	3655	7640
4.57	3416	7140
4.72	3199	6686
4.88	3002	6275
5.03	2823	5900
5.18	2659	5558
5.33	2509	5245
5.49	2372	4958
5.64	2245	4694
5.79	2129	4450
5.94	2021	4225
6.10	1921	4016

Columns – Allowable Concentric Axial Stresses and Loads


101.6 x 101.6 x 6.4mm Square Hollow Section			
Effective Length (m)	A	r	P _a (N)
	2412.90mm ²	38.86mm	
0.30	62091		149819
0.46	58663		141547
0.61	55234		133275
0.76	51806		125003
0.91	48378		116731
1.07	44949		108458
1.22	41521		100186
1.37	38093		91914
1.52	34665		83642
1.68	31236		75370
1.83	27808		67098
1.98	24380		58826
2.13	21071		50842
2.29	18355		44289
2.44	16132		38926
2.59	14290		34481
2.74	12747		30756
2.90	11440		27604
3.05	10325		24912
3.20	9365		22596
3.35	8533		20589
3.51	7807		18837
3.66	7170		17300
3.81	6608		15944
3.96	6109		14741
4.12	5665		13669
4.27	5268		12710
4.42	4911		11849
4.57	4589		11072
4.72	4297		10369
4.88	4033		9731
5.03	3792		9151
5.18	3573		8620
5.33	3371		8135
5.49	3187		7689
5.64	3017		7279
5.79	2860		6901
5.94	2715		6552
6.10	2581		6228

Columns – Allowable Concentric Axial Stresses and Loads

101.6 x 101.6 x 8mm Square Hollow Section			
	A	r	
101.6mm	2995.2mm ²	38.351358mm	
Effective Length (m)	F _a (kPa)	P _a (N)	
0.30	91014	272605	
0.61	91014	272605	
0.91	91014	272605	
1.22	91014	272605	
1.52	86198	258181	
1.83	59860	179292	
2.13	43979	131725	
2.44	33671	100852	
2.74	26604	79685	
3.05	21550	64545	
3.35	17810	53343	
3.66	14965	44823	
3.96	12751	38192	
4.27	10995	32931	
4.57	9578	28687	

Columns – Allowable Concentric Axial Stresses and Loads

101.6 x 101.6 x 9.5mm Square Hollow Section

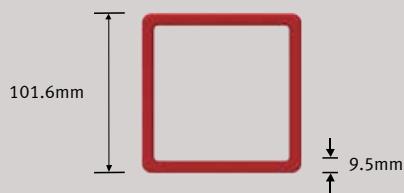

A

3503.22mm²

r

37.59mm


Effective Length (m)	F_a (kPa)	P_a (N)
0.30	61589	216707
0.46	58315	204291
0.61	54771	191875
0.76	51227	179459
0.91	47683	167043
1.07	44139	154628
1.22	40595	142212
1.37	37050	129796
1.52	33506	117830
1.68	29962	104964
1.83	26418	92548
1.98	22866	80105
2.13	19716	69070
2.29	17175	60168
2.44	15095	52882
2.59	13372	46843
2.74	11927	41783
2.90	10705	37501
3.05	9661	33844
3.20	8763	30698
3.35	7985	27971
3.51	7305	25591
3.66	6709	23503
3.81	6183	21660
3.96	5717	20026
4.12	5301	18570
4.27	4929	17268
4.42	4595	16097
4.57	4294	15042
4.72	4021	14087
4.88	3774	13220
5.03	3549	12431
5.18	3343	11711
5.33	3155	11051
5.49	2982	10446
5.64	2823	9889
5.79	2676	9375
5.94	2541	8901
6.10	2415	8461

Columns – Allowable Concentric Axial Stresses and Loads

127 x 127 x 8mm Square Hollow Section			
	A	r	
127mm	3808mm ²		
8mm		48.691204mm	
Effective Length (m)	F _a (kPa)	P _a (N)	
0.30	91014	346581	
0.61	227535	866453	
0.91	227535	866453	
1.22	227535	866453	
1.52	215495	820606	
1.83	149650	569866	
2.13	109947	418677	
2.44	84178	320549	
2.74	66511	253274	
3.05	53874	205152	
3.35	44524	169547	
3.66	37412	142466	
3.96	31878	121391	
4.27	27487	104669	
4.57	23944	91178	

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 153.4 x 9.5mm Square Hollow Section

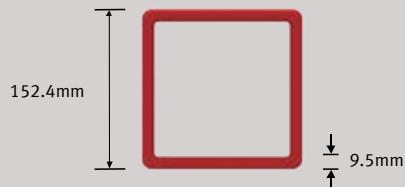

A


5335.47mm²

r

58.17mm


Effective Length (m)	F_a (kPa)	P_a (N)
0.30	51967	277266
0.46	50371	26873
0.61	48775	260239
0.76	47179	251725
0.91	45584	243211
1.07	43988	234697
1.22	42392	226183
1.37	40797	217669
1.52	39201	209155
1.68	37605	200641
1.83	36009	192127
1.98	34414	183613
2.13	32818	175099
2.29	31222	166585
2.44	29626	158071
2.59	28031	149557
2.74	26435	141043
2.90	24839	132529
3.05	23129	123407
3.20	20979	111934
3.35	19115	101989
3.51	17489	93313
3.66	16062	85699
3.81	14803	78980
3.96	13686	73022
4.12	12691	67713
4.27	11801	62963
4.42	11001	58695
4.57	10280	54847
4.72	9627	51366
4.88	9035	48206
5.03	8496	45328
5.18	8003	42701
5.33	7552	40296
5.49	7139	38089
5.64	6758	36057
5.79	6407	34185
5.94	6083	32454
6.10	5782	30852

Rectangular Hollow Section

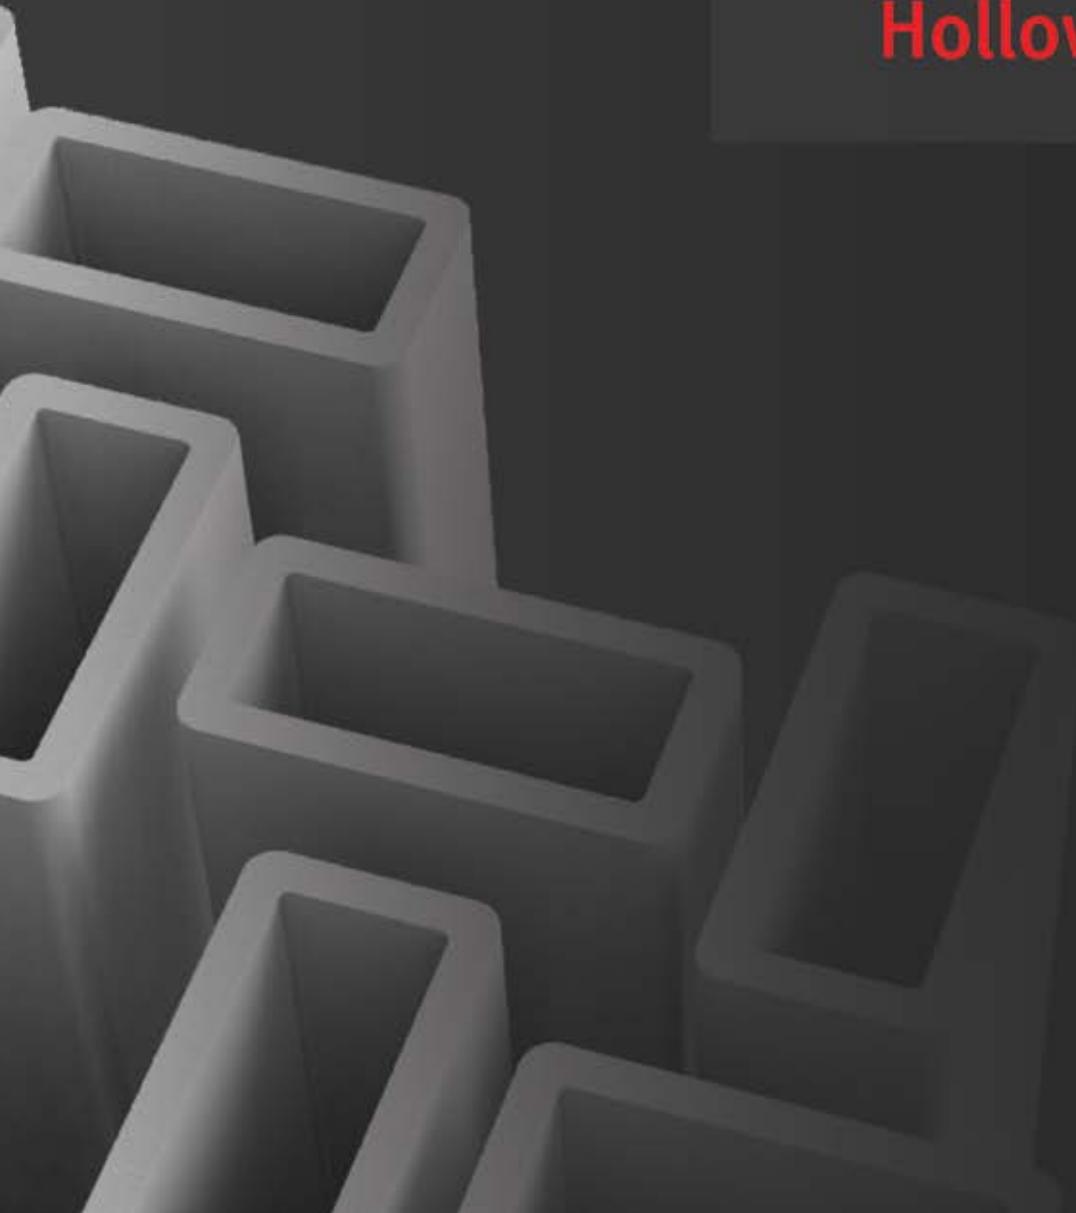

Columns – Allowable Concentric Axial Stresses and Loads

152.4 x 101.6 x 6.4mm Rectangular Hollow Section



A

3019.3mm²

r

40.89mm

Effective Length (m)	F_a (kPa)	P_a (N)
0.30	34263	103453
0.46	33000	99638
0.61	31736	95823
0.76	30473	92008
0.91	29209	88193
1.07	27946	84378
1.22	26682	80563
1.37	25419	76748
1.52	24155	72933
1.68	22892	69118
1.83	21628	65303
1.98	20365	61488
2.13	19101	57673
2.29	17838	53858
2.44	16574	50043
2.59	15311	46228
2.74	14047	42413
2.90	12668	38248
3.05	11433	34519
3.20	10370	31310
3.35	9448	28528
3.51	8645	26101
3.66	7939	23972
3.81	7317	22092
3.96	6765	20426
4.12	6273	18941
4.27	5833	17612
4.42	5438	16418
4.57	5081	15342
4.72	4759	14368
4.88	4466	13484
5.03	4199	12679
5.18	3956	11944
5.33	3733	11272
5.49	3529	10654
5.64	3340	10086
5.79	3167	9562
5.94	3007	9078
6.10	2858	8630

SPACE GASS Input Guide

SPACE GASS Input Guide

With the increasing popularity of SPACE GASS with the engineering and planning community at large, Treadwell is aware that it essential to aid users and make usage of this multi-purpose 3D analysis and design program simpler with our product guide. Instructions are tabulated step by step below on how to use our tables with the program.

Instructions

Under the Section segment:

On the second line:


1. **A** refers to Cross Sectional Area found in all products under Sectional Properties.
2. **J** refers to Torsion Constant found in all products under Sectional Properties.
3. **I_y** refers to moment of inertia about the Y axis found in all products under Sectional Properties.
4. **I_z** refers to moment of inertia about the X axis found in all products under Sectional Properties.
5. **A_y** refers to shear area. This can be left as zero.
6. **A_z** refers to shear area. This can be left as zero.
7. **Alpha** does not need to be altered.
8. **Mark** refers to section mark. This is not important for design.

Under the Material segment:

1. The first box refers to the material number.
2. The second box refers to the material name.
3. E refers to the Modulus of Elasticity found on pages 10 & 12 under Coupon Properties.
4. Poisson's refers to the Poisson's Ratio of FRP which is 0.23.
5. Mass Density refers to Density found on pages 10 & 12 under Coupon Properties.
6. Temp. Coefficient refers to the Coefficient of Thermal Expansion, LW, found on pages 10 & 12 under Coupon Properties.
7. F'c refers to the compressive strength of concrete which is 0.

Edit/Query Member

Member:	Type: Normal	Cable Len: 10	Chord Length: 10	Angle: 0	Node: N/A	Axis: N/A	Close
End A:	Node: 1	Fixity: FFFFFF	Trans: x y z	Rot: x y z	y Stiffness: 0	z Stiffness: 0	Cancel
End B:	Node: 2	Fixity: FFFFFF	Trans: x y z	Rot: x y z	y Stiffness: 0	z Stiffness: 0	Results
Section:	1	Source: Manual	Flip: No	Angle Type: N/A	Help		
	A : 0	J : 0	I_y : 0	I_z : 0	A_y : 0	A_z : 0	<input checked="" type="checkbox"/> Regen
Material:	1	E : 0	Poisson's: 0	Mass Dens: 0	Temp Coeff: 0	F'c: 0	<input type="button" value="OK"/>

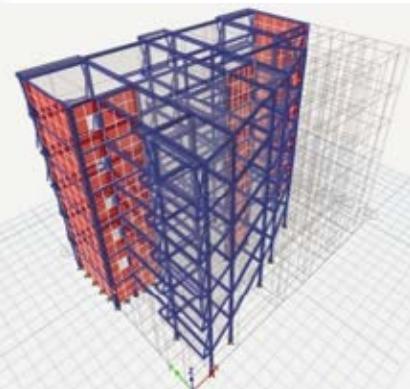



Corrosion Guide

Corrosion Guide

Information contained in this guide is based on data collected from several years of actual industrial applications. Recommendations are based on conservative evaluations of the changes which occur in certain properties of replicate laminates after exposures of one year or longer, both in the laboratory and the field.

Temperatures are neither the minimum nor the maximum but represent standard test conditions (Room Temperature & 70°C). The products may be suitable at higher temperatures but individual test data should be required to

establish such suitability. Contact Treadwell for any special applications that you may have.

The recommendations (• : resistant; – :not resistant) contained in this specification sheet are made without guarantee or representation as to results. We suggest that you evaluate these recommendations and suggestions in your own laboratory or actual field trial prior to use. Our responsibility for claims arising from breach of warranty, negligence, or otherwise **is limited to the purchase price of the material.**

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Acetaldehyde	–	–	–	–
Acetic Acid 0-25%	•	•	•	•
Acetic Acid 25-50%	•	–	•	•
Acetic Anhydride	–	–	–	–
Acetone	–	–	–	–
Acrylonitrile	–	–	–	–
Alcohol, Butyl	–	–	•	–
Alcohol, Ethyl 10%	–	–	•	66
Alcohol, Ethyl 100%	–	–	•	–
Alcohol, Isopropyl 10%	–	–	•	66
Alcohol, Isopropyl 100%	–	–	•	–
Alcohol, Methyl 10%	–	–	•	66
Alcohol, Methyl 100%	–	–	–	–
Alcohol, Methyl Isobutyl	–	–	•	66
Alcohol, Secondary Butyl	–	–	•	66
Alum	•	•	•	•
Aluminium Chloride	•	•	•	•
Aluminium Hydroxide	•	–	•	49
Aluminium Nitrate	•	•	•	•
Aluminium Potassium Sulfate	•	•	•	•
Ammonia, Aqueous 0-10%	–	–	•	38
Ammonia, Gas	–	–	•	38
Ammonium Bicarbonate	•	–	•	49
Ammonium Bisulfite	–	–	•	49
Ammonium Carbonate	–	–	•	49
Ammonium Citrate	•	–	•	49
Ammonium Fluoride	–	–	•	49
Ammonium Hydroxide 5%	•	–	•	49
Ammonium Hydroxide 10%	•	–	•	49
Ammonium Hydroxide 20%	–	–	•	49
Ammonium Nitrate	•	•	•	49
Ammonium Persulfate	–	–	•	49
Ammonium Phosphate	–	–	•	49
Ammonium Sulfate	•	•	•	•
Arsenious Sulfate	•	–	•	•
O-Benzoyl Benzoic Acid	–	–	•	•

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Barium Carbonate	•	–	•	•
Barium Chloride	•	–	•	•
Barium Hydroxide	–	–	•	49
Barium Sulfate	•	•	•	•
Barium Sulfide	–	–	•	•
Beer	•	–	•	49
Benzene	–	–	–	–
5% Benzene in Kerosene	•	–	•	•
Benzene Sulfonic Acid	•	•	•	•
Benzoic Acid	•	–	•	•
Benzyl Alcohol	–	–	•	–
Benzyl Chloride	–	–	–	–
Brass Plating Solution:				
– 3% Copper Cyanide	–	–	•	•
– 6% Sodium Cyanide	–	–	•	•
– 1% Zinc Cyanide	–	–	•	•
– 3% Sodium Carbonate	–	–	•	•
Butyl Acetate	–	–	–	–
Butyric Acid 0-50%	•	–	•	•
Butylene Glycol	•	•	•	•
Cadmium Chloride	•	–	•	•
Cadmium Cyanide Plating Soln:				
– 3% Cadmium Oxide	–	–	•	49
– 6% Sodium Cyanide	–	–	•	49
– 1% Caustic Soda	–	–	•	49
Calcium Bisulfate	•	•	•	•
Calcium Carbonate	•	–	•	•
Calcium Chlorate	•	•	•	•
Calcium Chloride	•	•	•	•
Calcium Hydroxide	•	–	•	49
Calcium Hypochlorite	•	–	•	49
Calcium Nitrate	•	•	•	•
Calcium Sulfate	•	•	•	•
Calcium Sulfite	•	•	•	•
Caprylic Acid	•	–	•	•
Carbon Dioxide	•	•	•	•

Corrosion Guide

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Carbon Disulfide	—	—	—	—
Carbon Monoxide	●	●	●	●
Carbon Tetrachloride	—	—	●	38
Carbon Acid	●	—	●	●
Castor Oil	●	●	●	●
Carbon Methyl Cellulose	—	—	●	49
Chlorinated Wax	—	—	●	●
Chlorine Dioxide/Air	●	—	●	●
Chlorine Dioxide, Wet Gas	—	—	●	●
Chlorine, Dry Gas	—	—	●	●
Chlorine, Wet Gas	—	—	●	●
Chlorine, Liquid	—	—	—	—
Chlorine, Water	—	—	●	●
Chloroacetic Acid 0-50%	—	—	●	38
Chlorobenzene	—	—	—	—
Chloroform	—	—	—	—
Chlorosulfonic Acid	—	—	—	—
Chromic Acid 20%	—	—	●	49
Chromic Acid 30%	—	—	—	—
Chromium Sulfate	●	●	●	●
Citric Acid	●	●	●	●
Coconut Oil	●	—	●	●
Copper Chloride	●	●	●	●
Copper Cyanide	—	—	●	●
Copper Fluoride	—	—	●	●
Copper Nitrate	●	●	●	●
Copper Plating Solution:				
– Copper Cyanide	—	—	●	●
– 10.5% Copper	—	—	●	●
– 4% Copper Cyanide	—	—	●	●
– 6% Rochelle Salts	—	—	●	●
Copper Brite Plating:				
– Caustic Cyanide	—	—	●	38
Copper Plating Solution:				
– 45% Copper Fluoroborate	—	—	●	●
– 19% Copper Sulfate	—	—	●	●
– 8% Sulfuric Acid	—	—	●	●
Copper Matte Dipping Bath:				
– 30% Ferric Chloride	—	—	●	●
– 19% Hydrochloric	—	—	●	●
Copper Pickling Bath:				
– 10% Ferric Sulfate	—	—	●	●
– 10% Sulfuric Acid	—	—	●	●
Copper Sulfate	●	●	●	●
Corn Oil	●	—	●	●
Corn Starch-Slurry	●	—	●	●

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Corn Sugar	●	—	●	●
Cottonseed Oil	●	—	●	●
Crude Oil, Sour	●	—	●	●
Crude Oil, Sweet	●	—	●	●
Cyclohexane	●	—	●	49
Detergents, Sulfonated	●	—	●	●
Di-Ammonium Phosphate	●	—	●	●
Dibromophenol	—	—	—	—
Dibutyl Ether	—	—	●	49
Dichloro Benzene	—	—	—	—
Dichloroethylene	—	—	—	—
Diesel Fuel	●	—	●	●
Diethylene Glycol	●	—	●	●
Dimethyl Phthalate	—	—	●	●
Diocetyl Phthalate	—	—	●	●
Diprophylene Glycol	●	—	●	●
Dodecyl Alcohol	—	—	●	●
Esters, Fatty Acids	●	●	●	●
Ethyl Acetate	—	—	—	—
Ethyl Benzene	—	—	—	—
Ethyl Ether	—	—	—	—
Ethylene Glycol	●	●	●	●
Ethylene Dichloride	—	—	—	—
Fatty Acids	●	●	●	●
Ferric Chloride	●	●	●	●
Ferric Nitrate	●	●	●	●
Ferric Sulfate	●	●	●	●
Ferrous Chloride	●	●	●	●
Ferrous Nitrate	●	●	●	●
Ferrous Sulfate	●	●	●	●
8-8-8 Fertiliser	●	—	●	49
Fertiliser:				
– Urea Ammonium Nitrate	—	—	●	49
Fuel Gas	—	—	●	●
Fluoboric Acid	—	—	●	49
Fluosilicic Acid 0-20%	—	—	●	●
Formaldehyde	●	—	●	●
Formic Acid	●	—	●	●
Fuel Oil	●	—	●	●
Gas Natural	●	—	●	●
Gasoline, Auto	●	—	●	●
Gasoline, Aviation	●	—	●	●
Gasoline, Ethyl	●	—	●	●
Gluconic Acid	●	—	●	●
Gasoline, Sour	●	—	●	●
Glucose	●	●	●	●

Corrosion Guide

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Glycerine	•	•	•	•
Glycol, Ethylene	•	•	•	•
Glycol, Propylene	•	•	•	•
Glycolic Acid	•	-	•	•
Gold Plating Solution:				
- 63% Potassium Ferrocyanide	-	-	•	•
- 2% Potassium Gold Cyanide	-	-	•	•
- 8% Sodium Cyanide	-	-	•	•
Heptane	•	-	•	•
Hexane	•	-	•	•
Hexylene Glycol	•	•	•	•
Hydraulic Fluid	•	-	•	•
Hydrobromic Acid 0-25%	•	-	•	•
Hydrochloric Acid 0-37%	•	-	•	•
Hydrocyanic Acid	•	-	•	•
Hydrofluoric Acid 10%	-	-	•	-
Hydrofluosilicic Acid, 10%	-	-	•	•
Hydrogen Bromide, Wet Gas	-	-	•	•
Hydrogen Chloride, Dry Gas	-	-	•	•
Hydrogen Chloride, Wet Gas	-	-	•	•
Hydrogen Peroxide	-	-	•	49
Hydrogen Sulfide, Dry	•	-	•	•
Hydrogen Sulfide, Aqueous	•	-	-	•
Hydrogen Fluoride, Vapour	-	-	•	•
Hydrosulfite Bleach	-	-	•	49
Hydrochlorous Acid 0-10%	-	-	-	-
Iron Plating Solution:				
- 45% FeCl: 15% CaCl	-	-	•	•
- 20% FeCl: 11% (NH4)2SO4	-	-	•	•
Iron And Steel Cleaning Bath:				
-9% Hydrochloric: 23% Sulfuric	-	-	•	•
Isopropyl Amine	-	-	•	38
Isopropyl Palmitate	•	•	•	•
Jet Fuel	•	-	•	•
Kerosene	•	-	•	•
Lactic Acid	•	-	•	•
Lauroryl Chloride	-	-	•	•
Lauric Acid	•	-	•	•
Lead Acetate	•	-	•	•
Lead Chloride	•	-	•	•
Lead Nitrate	•	-	•	•
Lead Plating Solution:				
-.8% Fluoboric, 0.4% Boric Acid	-	-	•	•
Levulinic Acid	•	-	•	•
Linseed Oil	•	•	•	•
Lithium Bromide	•	•	•	•

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Lithium Sulfate	•	•	•	•
Magnesium Bisulfite	•	-	•	•
Magnesium Carbonate	•	-	•	•
Magnesium Chloride	•	•	•	•
Magnesium Hydroxide	-	-	•	60
Magnesium Nitrate	•	-	•	•
Magnesium Sulfate	•	•	•	•
Maleic Acid	•	•	•	•
Mercuric Chloride	•	-	•	•
Mercurous Chloride	•	-	•	•
Methylene Chloride	-	-	-	-
Methyl Ethyl Ketone	-	-	-	-
Methyl Isobutyl Carbitol	-	-	-	-
Methanol (See Alcohol)	•	-	•	•
Methyl Isobutyl Ketone	-	-	-	-
Methyl Styrene	-	-	-	-
Mineral Oils	•	•	•	•
Molybdenum Disulfide	•	-	•	•
Monochloro Acetic Acid	-	-	-	-
Monoethanolamine	-	-	-	-
Motor Oil	•	•	•	•
Myristic Acid	-	-	•	•
Naphtha	•	•	•	•
Naphthalene	•	-	•	•
Nickel Chloride	•	•	•	•
Nickel Nitrate	•	•	•	•
Nickel Plating:				
- 8% Lead, 0.8% Fluboric Acid	-	-	•	•
- 0.4% Boric Acid	-	-	•	•
Nickel Plating:				
- 11% Nickel Sulfate	•	-	•	•
- 2% Nickel Chloride	•	-	•	•
- 1% Boric Acid	•	-	•	•
Nickel Plating:				
- 44% Nickel Sulfate	•	-	•	•
- 4% Ammonium Chloride	•	-	•	•
- 4% Boric Acid	•	-	•	•
Nickel Sulfate	•	•	•	•
Nitric Acid 0-5%	•	•	•	•
Nitric Acid 20%	-	-	•	49
Nitric Acid Fumes	-	-	-	-
Nibrobenzene	-	-	-	-
Octanoci Acid	•	-	•	•
Oil, Sour Crude	•	•	•	•
Oil, Sweet Crude	•	•	•	•
Oleic Acid	•	•	•	•

Corrosion Guide

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Oleum (Fuming Sulfuric)	-	-	-	-
Olive Oil	•	•	•	•
Oxalic Acid	•	•	•	•
Peroxide Bleach:				
- 25% Peroxide 95%	•	•	•	•
- 0.025% Epsom Salts	•	•	•	•
- 5% Sodium Silicate 42.Be	•	•	•	•
- 1.4% Sulfuric Acid 66.Be	•	•	•	•
Phenol	-	-	-	-
Phenol Sulfonic Acid	-	-	-	-
Phosphoric Acid	•	•	•	•
Phosphoric Acid Fumes	•	•	•	•
Phosphorous Pentoxide	•	•	•	•
Phosphorous Trichloride	-	-	-	-
Phthalic Acid	•	•	•	•
Pickling Acids (Sulfuric & Hydrochloric)	•	•	•	•
Picric Acid, Alcoholic	-	-	-	-
Polyvinyl Acetate Latex	•	-	•	•
Polyvinyl Alcohol	•	-	•	38
Polyvinyl Chloride Latex W/35 (Parts Dop)	-	-	•	49
Potassium Aluminium Sulfate	•	•	•	•
Potassium Bicarbonate	•	-	•	60
Potassium Bromide	•	-	•	38
Potassium Carbonate	•	-	•	60
Potassium Chloride	•	•	•	•
Potassium Dichromate	•	-	•	60
Potassium Ferricyanide	•	•	•	•
Potassium Ferrocyanide	•	•	•	•
Potassium Hydroxide	-	-	•	66
Potassium Nitrate	•	•	•	•
Potassium Permanganate	•	-	•	60
Potassium Persulfate	•	-	•	•
Potassium Sulfate	•	•	•	•
Propionic Acid 1-50%	-	-	•	49
Propionic Acid 50-100%	-	-	-	-
Propylene Glycol	•	•	•	•
Pulp Paper Mill Effluent	•	-	•	•
Pyridine	-	-	-	-
Salicylic Acid	-	-	•	60
Sebacic Acid	-	-	•	•
Selenious Acid	-	-	•	•
Silver Nitrate	•	•	•	•
Silver Plating Solution:				
- 44% Silver Cyanide	-	-	•	•
- 7% Potassium Cyanide	-	-	•	•
- 5% Sodium Cyanide	-	-	•	•


Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
- 2% Potassium Carbonate	-	-	•	•
Soaps	•	-	•	•
Sodium Acetate	•	-	•	•
Sodium Benzoate	•	-	•	•
Sodium Bicarbonate	•	•	•	•
Sodium Bifluoride	•	-	•	49
Sodium Bisulfate	•	•	•	•
Sodium Bisulfite	•	•	•	•
Sodium Bromate	•	•	•	60
Sodium Bromide	•	•	•	•
Sodium Carbonate 0-25%	•	-	•	•
Sodium Chlorate	•	-	•	•
Sodium Chloride	•	•	•	•
Sodium Chlorite	•	-	•	•
Sodium Chromite	•	•	•	•
Sodium Cyanide	•	-	•	•
Sodium Dichromate	•	•	•	•
Sodium Di-Phosphate	•	•	•	•
Sodium Ferricyanide	•	•	•	•
Sodium Fluoride	•	-	•	49
Sodium Fluoro Silicate	-	-	•	49
Sodium Hexametaphosphates	-	-	•	38
Sodium Hydroxide 0-5%	-	-	•	66
Sodium Hydroxide 5-25%	-	-	•	66
Sodium Hydroxide 50%	-	-	•	66
Sodium Hydrosulfide	•	-	•	•
Sodium Hypochlorite	•	-	•	66
Sodium Lauryl Sulfate	•	•	•	•
Sodium Mono-Phosphate	•	•	•	•
Sodium Nitrate	•	•	•	•
Sodium Silicate	•	-	•	•
Sodium Sulfate	•	•	•	•
Sodium Sulfide	•	-	•	•
Sodium Sulfite	•	-	•	•
Sodium Tetra Borate	•	•	•	•
Sodium Thiocyanate	-	-	•	•
Sodium Thiosulfate	•	-	•	•
Sodium Tripolyphosphate	•	-	•	•
Sodium Xylene Sulfonate	•	-	•	•
Sodium Solutions	•	-	•	•
Sodium Crude Oil	•	•	•	•
Soya Oil	•	•	•	•
Stannic Chloride	•	•	•	•
Stannous Chloride	•	•	•	•
Stearic Acid	•	•	•	•
Styrene	-	-	-	-

Corrosion Guide

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Sugar, Beet And Cane Liquor	•	—	•	•
Sugar, Sucrose	•	•	•	•
Sulfamic Acid	•	—	•	•
Sulfanilic Acid	•	—	•	•
Sulfated Detergents	•	—	•	•
Sulfur Dioxide, Dry Or Wet	—	—	•	•
Sulfur Trioxide/Air	—	—	•	•
Sulfuric Acid 0-30%	•	•	•	•
Sulfuric Acid 30-50%	—	—	•	•
Sulfuric Acid 50-70%	—	—	•	49
Sulfurous Acid	—	—	•	38
Superphosphoric Acid (76% P2O5)	•	—	•	•
Tall Oil	•	—	•	60
Tannic Acid	•	—	•	66
Tartaric Acid	•	•	•	•
Thionyl Chloride	—	—	—	—
Tin Plating:				
– 18% Stannous Fluoroborate	—	—	•	•
– 7% Tin	—	—	•	•
– 9% Fluoroboric Acid	—	—	•	•
– 2% Boric Acid	—	—	•	•
Toluene	—	—	—	—
Toluene Sulfonic Acid	—	—	•	•
Transformer Oils:				
– Mineral Oil Types	•	•	•	•
– Chloro-Phenyl Types)	•	•	•	•
Trichlor Acetic Acid	•	—	•	•
Trichlorethylene	—	—	—	—
Trichloropenol	—	—	—	—
Tricresyl Phosphate	—	—	•	49

Chemical	I-Series		V-Series	
	Room Temp	70°C	Room Temp	70°C
Tridecybenzene Sulfonate	•	—	•	•
Trisodium Phosphate	•	—	•	•
Turpentine	—	—	•	38
Urea	—	—	•	38
Vegetable Oils	•	•	•	•
Vinegar	•	•	•	•
Vinyl Acetate	—	—	—	—
Water:				
– Deionised	—	—	—	—
– Demineralised	•	•	•	•
– Distilled	•	•	•	•
– Fresh	•	•	•	•
– Salt	•	•	•	•
– Sea	•	•	•	•
White Liquor (Pulp Mill)	•	—	•	•
Xylene	—	—	—	—
Zinc Chlorate	•	•	•	•
Zinc Nitrate	•	•	•	•
Zinc Plating Solution:				
– 9% Zinc Cyanide	—	—	•	49
– 4% Sodium Cyanide	—	—	•	49
– 9% Sodium Hydroxide	—	—	•	49
Zinc Plating Solution:				
– (49% Zinc Fluoroborate	•	—	•	•
– 5% Ammonium Chloride	•	—	•	•
– 6% Ammonium Fluoroborate	•	—	•	•
Zinc Sulfate	•	•	•	•



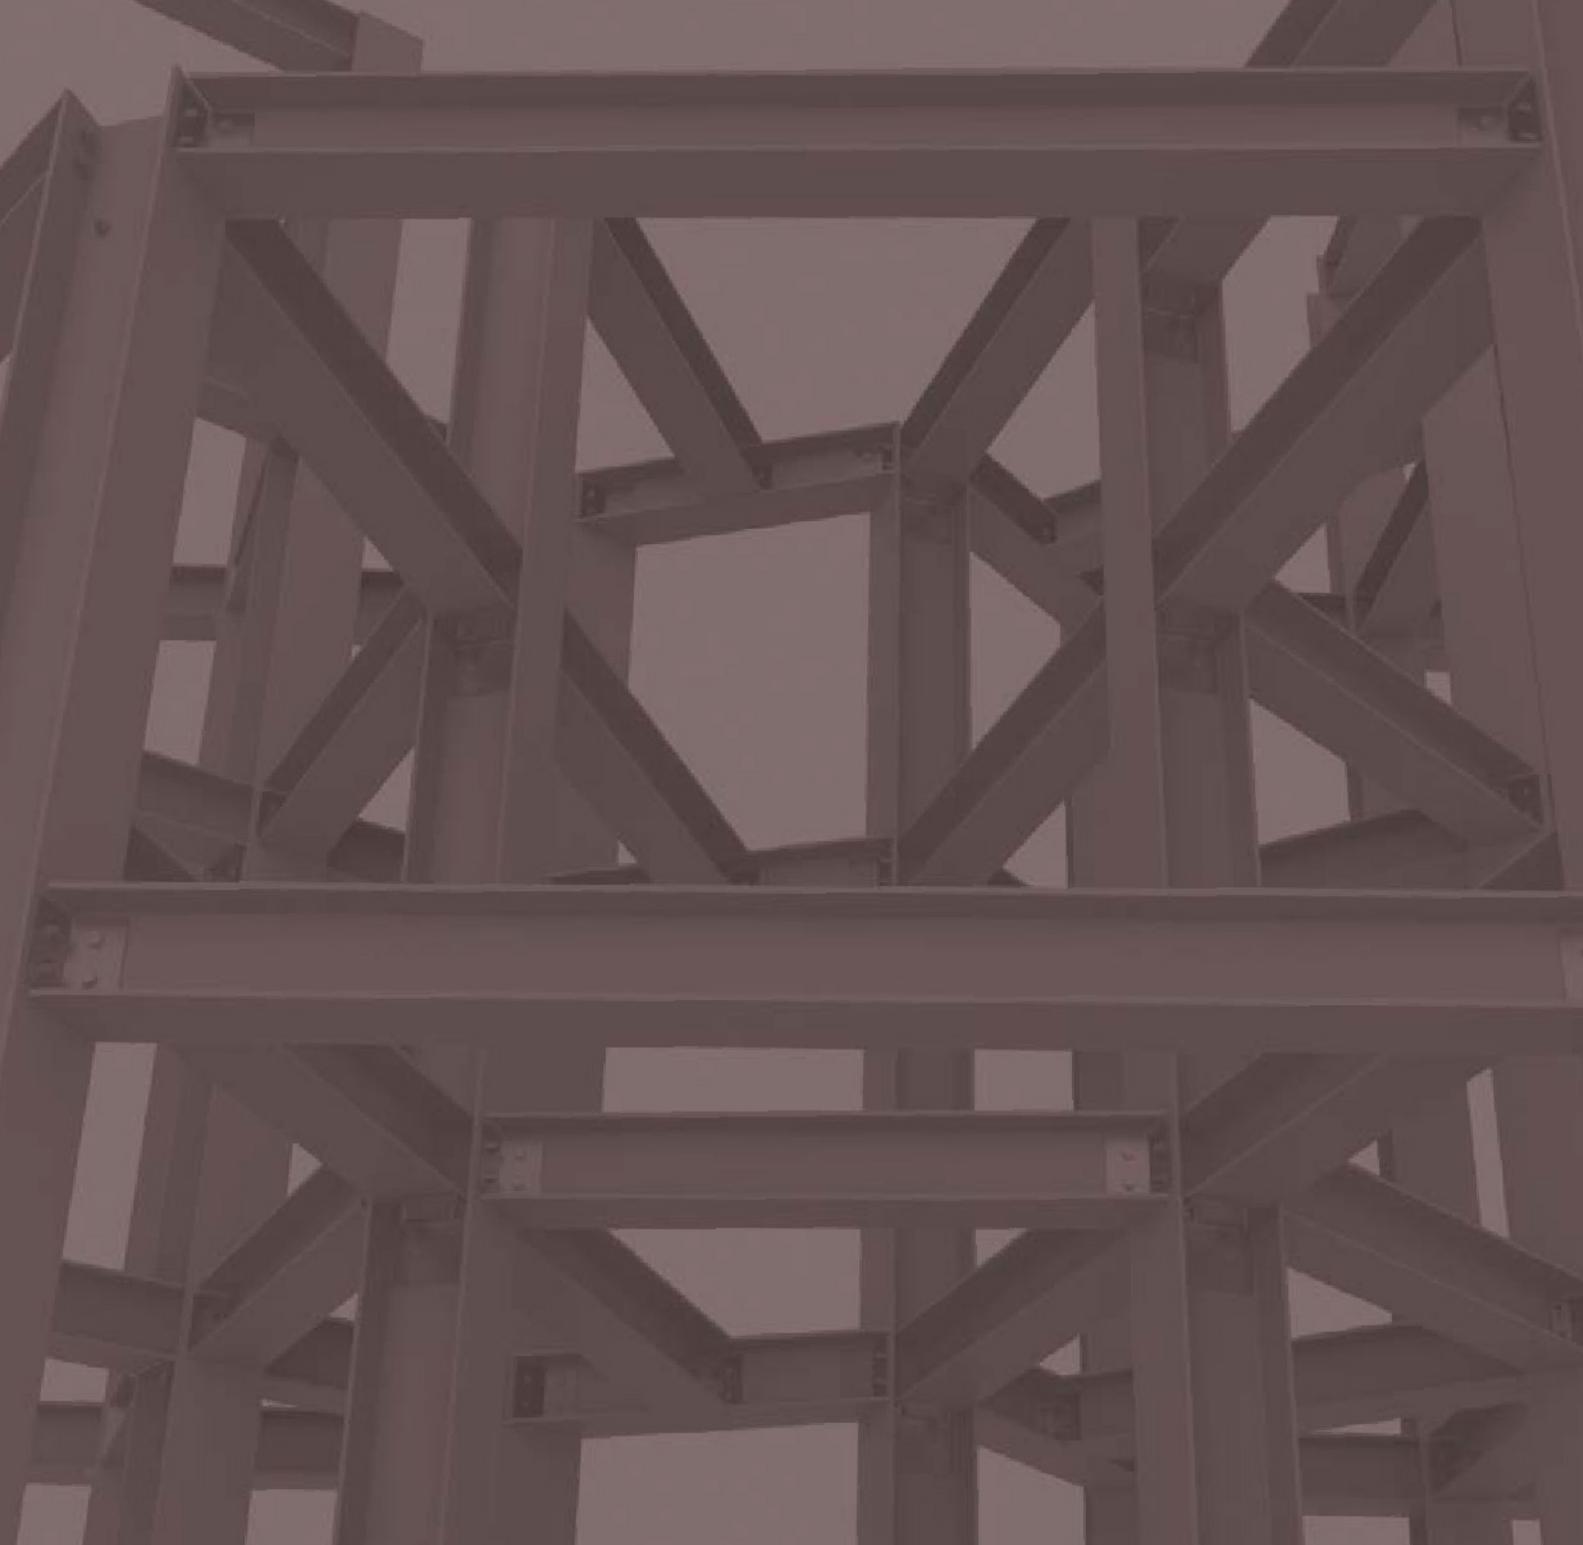

TREADWELL™

Treadwell Access Systems, EX-Series®, GratEX®, MoutrEX® and ArchitEX™ are all registered brands of Treadwell Group Pty Ltd. All pictures and information are supplied as a guide only. The complete range of Treadwell products are developed, refined and made to meet and exceed stringent specifications for the worldwide market.

Important Note: Sales of products are subject to our Terms and Conditions which are available upon request. All specifications and photos are a guide only and are subject to change without notice. Please ring to confirm details. Treadwell products only comply with relevant standards mentioned within this publication when installed and used as they are designed to be.

